ELECTRICAL ENGINEERING

SEPTEMBER 1949

PUBLISHED MONTHLY BY THE AMERICAN INSTITUTE OF ELECTRICAL ENGINEERS

Introducing... RUPTAIR REPLACEMENT UNITS!

5 kv, 150 mva *Ruptair* replacement units in substation of large midwest utility.

Typical Modernization Application:

You salvage everything but the obsolete breaker when you install *Ruptair* replacement units. New current transformers, disconnect switches, or buses are usually unnecessary.

A.) Typical open type iron pipe framework used with oil type circuit breaker and other switchgear components.


B.) New *Ruptair* unit replaces obsolete circuit breakers without disturbing buses, disconnect switches, instrument transformers.


C.) Side view of installation B.

- **IMPROVE CIRCUIT PROTECTION**
- **REDUCE MAINTENANCE**
- **MODERNIZE INADEQUATE FACILITIES**

NOW YOU CAN REPLACE obsolete, worn out, low capacity oil breakers with *modern Ruptair* circuit breakers. These Vertical-lift Replacement Units are the logical way to get reliable protection with minimum expense, installation time and station modification.

Utilities can increase station interrupting capacity, meet modern power distribution requirements with these new units.

The Vertical-lift *Ruptair* circuit breaker is oilless, reduces fire hazard, requires little maintenance. Attached wheels make possible inspection and maintenance remote from the unit.

Unit is easily installed in existing concrete or masonry cells or in open-type iron pipe framework. Comparative low height makes it applicable to small existing structures. Vertical-lift design simplifies connection of bushings to existing bus or cable at minimum cost.

Voltage ratings 2300 and 4160 volts, interrupting capacities 100, 150, 250 mva. Current capacities 1200 and 2000 amperes, a-c or d-c solenoid operation.

Call your A-C sales office or write direct for new Bulletin 18B7094.

Ruptair is an Allis-Chalmers trademark.

ALLIS-CHALMERS

First in the U. S. with Metal-Clad Switchgear

ALLIS-CHALMERS, 931A SO. 70 ST.
MILWAUKEE, WIS.

Please send new bulletin 18B7094 on *Ruptair* replacement unit.

Name

Title

Company

Address

City State

A-2747

ELECTRICAL ENGINEERING

Registered United States Patent Office

SEPTEMBER
1949

The Cover: The product cycle for step-type feeder voltage regulators such as the one shown has been materially reduced by the use of this new panel-type, steam-heated, core drying oven at Allis-Chalmers Manufacturing Company.

Allis-Chalmers photo

Highlights (including News Index) . . . 3A
Can Engineers Be Synchronized? James F. Fairman . . . 749
The Bell Computer, Model VI E. G. Andrews . . . 751
Is There a Doctor in the House? T. C. Lloyd, P. H. Trickey, W. R. Hough, C. P. Potter . . . 759
Transmission Line Charts Herbert L. Krauss . . . 767
Industrial Exploration and Development J. F. Downie Smith . . . 777
Electrostatic Air Cleaning in the Textile Industry C. H. McWhirter, R. P. Posey . . . 783
Matching McNary Electrical Characteristics With Bonneville Transmission System B. V. Hoard, Lewis Weiner . . . 789
A Telephone Number Recorder F. Hinton, F. E. Planer . . . 795
Conferences on the Textile Industry Digests . . . 797
Officers and Committees for 1949–50 . . . 799

TECHNICAL-PAPER DIGESTS

Armature Iron Losses in Series Motors Sheldon S. L. Chang, J. H. Karr . . . 757
Lightning Investigation on a Rural System D. D. MacCarthy, D. A. Stann, D. R. Edge, W. C. McKinley . . . 758
Cable Impregnated With High-Viscosity Oil Joseph Sticher, G. H. Doan, R. W. Atkinson, Louis Meyerhoff . . . 765
Facsimile Transmission Speed Henry F. Burkhard . . . 766
Characteristics of 2-Phase Servomotors R. J. W. Koopman . . . 775
The Flux Field in the Shaded-Pole Motor E. E. Kimberly . . . 776
A 3,000-Horsepower Gas Turbine Power Plant J. S. Haverstick . . . 782
Vibrating Reed Selectors for Mobile Radio Use A. C. Keller, L. G. Bostwick . . . 787
Transconductance of Electron Tubes T. Slonczewski . . . 788
An Analysis of Magnetic Recording C. S. Thompson . . . 793
Equivalent Circuits for Power-Flow Studies J. B. Ward . . . 794

Miscellaneous Short Items:

Electrical Essays, 762; Cathodic Vacuum Etching 764; Resonance Radiation, 796

Institute Activities . . . 812
AIEE Personalities, 816; Obituaries, 819; Membership, 820

Of Current Interest . . . 824
Letters to the Editor, 827; New Books, 828; Pamphlets, 828

Industrial Notes . . . 18A
New Products, 18A; Trade Literature, 50A; Index to Advertisers, 56A

Charles S. Rich
Editor
Edward E. Grazda
Associate Editor
F. A. Norris
Business Manager
J. S. Lopes
Advertising Director

VOL. 68 NO. 9

Statements and opinions given in articles and papers appearing in ELECTRICAL ENGINEERING are the expressions of contributors, for which the Institute assumes no responsibility. ¶ Correspondence is invited on all controversial matters.

Published Monthly by the

AMERICAN INSTITUTE OF ELECTRICAL ENGINEERS

Founded 1884

JAMES F. FAIRMAN, President H. H. HENLINE, Secretary

PUBLICATION COMMITTEE: K. B. McEachron, *Chairman* F. R. Benedict J. M. Flanigen P. B. Garrett H. H. Henline R. K. Honaman B. M. Jones F. O. McMillan G. C. Quinn B. R. Teare, Jr. G. C. Tenney C. H. Willis

ELECTRICAL ENGINEERING: Copyright 1949 by the American Institute of Electrical Engineers; printed in the United States of America; indexed annually by the AIEE weekly and annually by *Engineering Index*, and monthly by *Industrial Arts Index;* abstracted monthly by *Science Abstracts* (London). Address changes must be received at AIEE headquarters, 33 West 39th Street, New York 18, N. Y., by the first of the month to be effective with the succeeding issue. Copies undelivered because of incorrect address cannot be replaced without charge.

ample kiln capacity

safeguards AlSiMag quality and helps keep deliveries on schedule

ALSIMAG
Reg. U.S. Pat. Off.

Side view of one of AlSiMag's tunnel kilns. All kilns, both circular and tunnel, are handled from one centralized control panel.

- Completely automatic controls hold firing temperatures within ± 2° C. in AlSiMag's kilns. As an extra safeguard, highly trained and skilled kiln operators are on duty every minute of the day and night. Recording instruments plus operator's hourly checks and records assure that all AlSiMag material is accurately fired.

AMERICAN LAVA CORPORATION

48TH YEAR OF CERAMIC LEADERSHIP

CHATTANOOGA 5, TENNESSEE

OFFICES: METROPOLITAN AREA: 671 Broad St., Newark, N. J., Mitchell 2-8159 • CHICAGO, 9 South Clinton St., Central 6-1721
PHILADELPHIA, 1649 North Broad St., Stevenson 4-2823 • LOS ANGELES, 232 South Hill St., Mutual 9076
NEW ENGLAND, 38-B Brattle St., Cambridge, Mass., Kirkland 7-4498 • ST. LOUIS, 1123 Washington Ave., Garfield 4959

HIGHLIGHTS . . . .

AIEE Prize Rules. The AIEE Board of Directors at their annual meeting during the AIEE Summer General Meeting in Swampscott, Mass., approved a new set of prize rules for AIEE technical papers. Eligibility and entrance requirements as well as basis of grading are listed in this issue (*page 813*).

National Instrument Conference. The Fourth National Instrument Conference and Exhibit will be held in St. Louis, Mo., in September. The conference will include two technical sessions arranged by the AIEE Committee on Instruments and Measurements, thus marking the second year of participation by the Institute (*page 815*).

Institute Statistics. The Institute now boasts a total of 85 Sections, including the recently organized Ottawa and Western Virginia Sections, and 129 Student Branches. Complete listings of all Sections and Student Branches, together with their locations and officers, are presented in this issue. Also included are listings of the AIEE Subsections and of the geographical District executive committees (*pages 805–07*).

Fall Meeting. Plans for the AIEE Fall General Meeting are nearing completion. To be held in Cincinnati, Ohio, October 17–21, 1949, the meeting features a number of interesting inspection trips (*page 812*). The detailed program is scheduled for publication next month.

Officers and Committees List. The complete list of main AIEE committees, both general and technical, for 1949–50 appears in this issue (*pages 799–804*). The Institute's technical committees are now grouped in five divisions: communication, general applications, industry, power, and science and electronics. That the Institute's technical activities are expanding is readily appreciated when it is realized that there are 39 technical committees in these five technical groups, and that there are about 120 subcommittees (to be listed in future issues of *Electrical Engineering*) of these main committees. Scopes of the main technical committees are also listed in this issue (*pages 808–11*).

News Index

Institute Activities..................812

1949 AIEE Fall General Meeting..............812
New Prize Rules for Technical Papers..........813
Textile Industry Conferences Held.............814
Future AIEE Meetings........................814
Committee Notes............................815
AIEE Personalities.........................816
Obituary...................................819
Membership.................................820

Of Current Interest..................824

Annual ASTM Meeting Held...................824
Future Meetings of Other Societies............825
Letters to the Editor.......................827
New Books..................................828
Pamphlets..................................828

AIEE Textile Industry Conferences. Two more special AIEE meetings known as AIEE Conferences have been held. Both of these were on electrical engineering problems in the textile industry, and took place in Boston, Mass., and Atlanta, Ga. Digests of some of the papers presented at these gatherings (*page 797–8*) and a brief news report (*page 814*) appear in this issue.

Organizing Engineers. Ever since the AIEE Subcommittee on Professional Activities of the AIEE Committee on Planning and Co-ordination published a summary of its report "Organization of the Engineering Profession," (*EE, May '47, pp 496–501*) discussion on this subject has grown steadily. Some actions towards greater unity of the engineering profession have been taken. AIEE President Fairman outlines what has been done and how we must proceed in order to attain this desirable goal (*pages 749–50*).

Bell Computer, Model VI. Intelligence levels are built into this latest model of the Bell relay-type digital computers. This minimizes the punched-tape instructions that must be fed to the computer from its remote control stations (*pages 751–6*).

Motor Design Problems. Are there any unsolved motor design problems worth investigating that might make suitable masters' and doctors' theses subjects? The chief engineers of four motor manufacturers answer this question in the affirmative citing specific problems (*pages 759–62*).

Electrostatic Air Cleaning. Textile applications of the Precipitron have paid off with less spoilage and fewer hours lost because of workers being ill. Although the accumulation of lint on electrodes is a problem, several solutions have proved successful (*pages 783–6*).

McNary Characteristics. The right combination of transmission lines and powerhouse equipment will save an estimated $7,000,000 for the Federal Government in adding McNary Dam power to its network. Engineers of the Bonneville Power Administration tell how network analyzer studies and cost analysis were used to find the solution (*pages 789–92*).

AIEE Proceedings

Order forms for current AIEE *Proceedings* have been published in *Electrical Engineering* as listed below. Each section of AIEE *Proceedings* contains the full, formal text of a technical program paper, including discussion, if any, as it will appear in the annual volume of AIEE *Transactions*.

AIEE *Proceedings* are an interim membership service, issued in accordance with the revised publication policy that became effective January 1947 (*EE, Dec '46, pp 567–8; Jan '47, pp 82–3*). They are available to AIEE Student members, Associates, Members, and Fellows only.

All technical papers issued as AIEE *Proceedings* will appear in *Electrical Engineering* in abbreviated form.

Location of Order Forms	Meetings Covered
Oct '48, p 43A	Pacific General Middle Eastern District
Dec '48, p 35A	Midwest General Southern District
Apr '49, p 25A	Winter General (1949)
Jul '49, p 47A	South West District Summer General

Absentee Subscriber Device. Two British scientists have developed a new kind of message recorder, which, when connected to the terminals of a telephone, will print on a tape the numbers of all those who called during the subscriber's absence. Less expensive and complex than a spoken-message recorder, this instrument consumes 30 watts during the reception of a call and no power at all during waiting periods (*pages 795–6*).

Industrial Research. In industry, a research department must demonstrate to the company that it is worth its cost. And the cost is high; a firm should be prepared to invest at least $100,000 in that department. Otherwise, the company should have its research done at a foundation, where the vast array of specialists, required in modern research work, is available (*pages 777–87*).

Transmission Line Charts. Solving problems dealing with high-frequency transmission lines and wave guides is laborious when done using equations. Tedious calculations are reduced when charts are employed, the two most popular of these being the rectangular chart and the Smith chart. A simplified derivation of these charts is presented for the benefit of those who are familiar with their application but not their theory (*pages 767–74*).

ELECTRICAL ENGINEERING. Published monthly by the American Institute of Electrical Engineers; publication office 20th & Northampton Streets, Easton, Pa. Editorial and advertising offices, 500 Fifth Avenue, New York 18, N. Y. Subscription $12 per year plus extra postage charge to all countries to which the second-class postage rate does not apply; single copy $1.50. Entered as second-class matter at the Post Office, Easton, Pa., under the Act of Congress of March 3, 1879. Accepted for mailing at special postage rates provided for in Section 538, P. L. & R. Act of February 28, 1925. September 1949, Vol. 68, No. 9. Number of copies of this issue 50,400.

Now! READY-TO-USE SLOT INSULATORS BY Inmanco

Save
TIME
MONEY
BOTHER

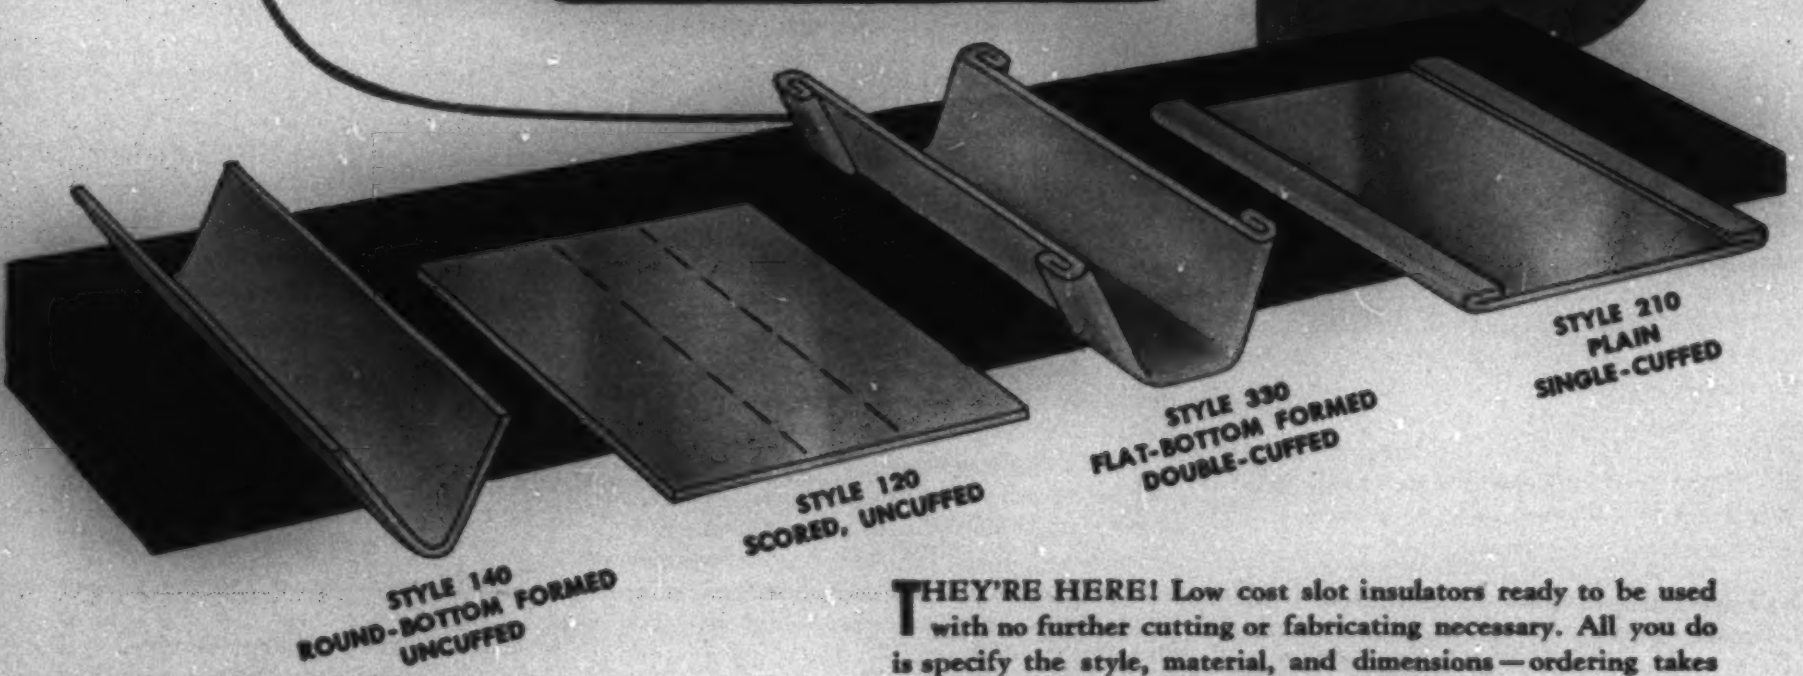

THEY'RE HERE! Low cost slot insulators ready to be used with no further cutting or fabricating necessary. All you do is specify the style, material, and dimensions—ordering takes less time, bothersome details are eliminated.

You save time and money on the assembly line, too! Each accurately made insulator slips into the slot easily. No time is wasted struggling with inaccurate pieces or cutting insulators to size from bulky sheets or rolls of paper.

Inmanco Stylized Slot Insulators, developed with the co-operation of the John A. Manning Paper Company and Hollingsworth & Vose Company, are manufactured with Inmanco's expert fabricating know-how and facilities. Fourteen standard styles can be supplied to your exact specifications. Papers available include Manning 100 and 300 All Rag Papers, Manning 200 and 100 Part Rag Papers, Hollingsworth & Vose Groton Tan and Red Pure Wood Pulp Papers, Acetate-Covered Papers, and other electrical insulating papers.

Start saving time, money, and bother today! Ask your nearest distributor, listed below, for the free Inmanco Slot Insulator Bulletin which will help you select the right style and material.

Inmanco Products are made exclusively by Insulation Manufacturers Corporation

Inmanco SLOT INSULATORS ARE AVAILABLE IN THESE STANDARD STYLES

STYLE	DESCRIPTION
110	Plain, uncuffed
120	Scored, uncuffed
210	Plain, single-cuffed
220	Scored, single-cuffed
310	Plain, double-cuffed
320	Scored, double-cuffed
130	Flat-bottom formed, uncuffed
230	Flat-bottom formed, single-cuffed
330	Flat-bottom formed, double-cuffed
140	Round-bottom formed, uncuffed
240	Round-bottom formed, single-cuffed
340	Round-bottom formed, double-cuffed

GET INMANCO READY-TO-USE SLOT INSULATORS FROM THESE MANNING DISTRIBUTORS

INSULATION MANUFACTURERS CORPORATION
Chicago • Cleveland • Dayton • Detroit • Milwaukee
Also represented by: H. R. Brethen, Detroit • H. A. Holden, Inc., Minneapolis • W. C. Johnson, Peoria, Ill.

ROBERT McKEOWN COMPANY
Newark, New Jersey

EARL [illegible] BEACH COMPANY
Pittsburgh, Pa.

DIAMOND STATE FIBRE COMPANY OF CANADA, LIMITED
Toronto, Ont., Canada

INSULATION AND WIRES INCORPORATED
Adrian, Michigan • Atlanta • Boston • Detroit • Fort Worth, Texas • Hillside, N. J. • Houston
Los Angeles • Philadelphia • Portland, Oregon • St. Louis • San Francisco

OKOTHERM INSULATED CABLE ON JET ENGINE WITHSTANDS 400° F.

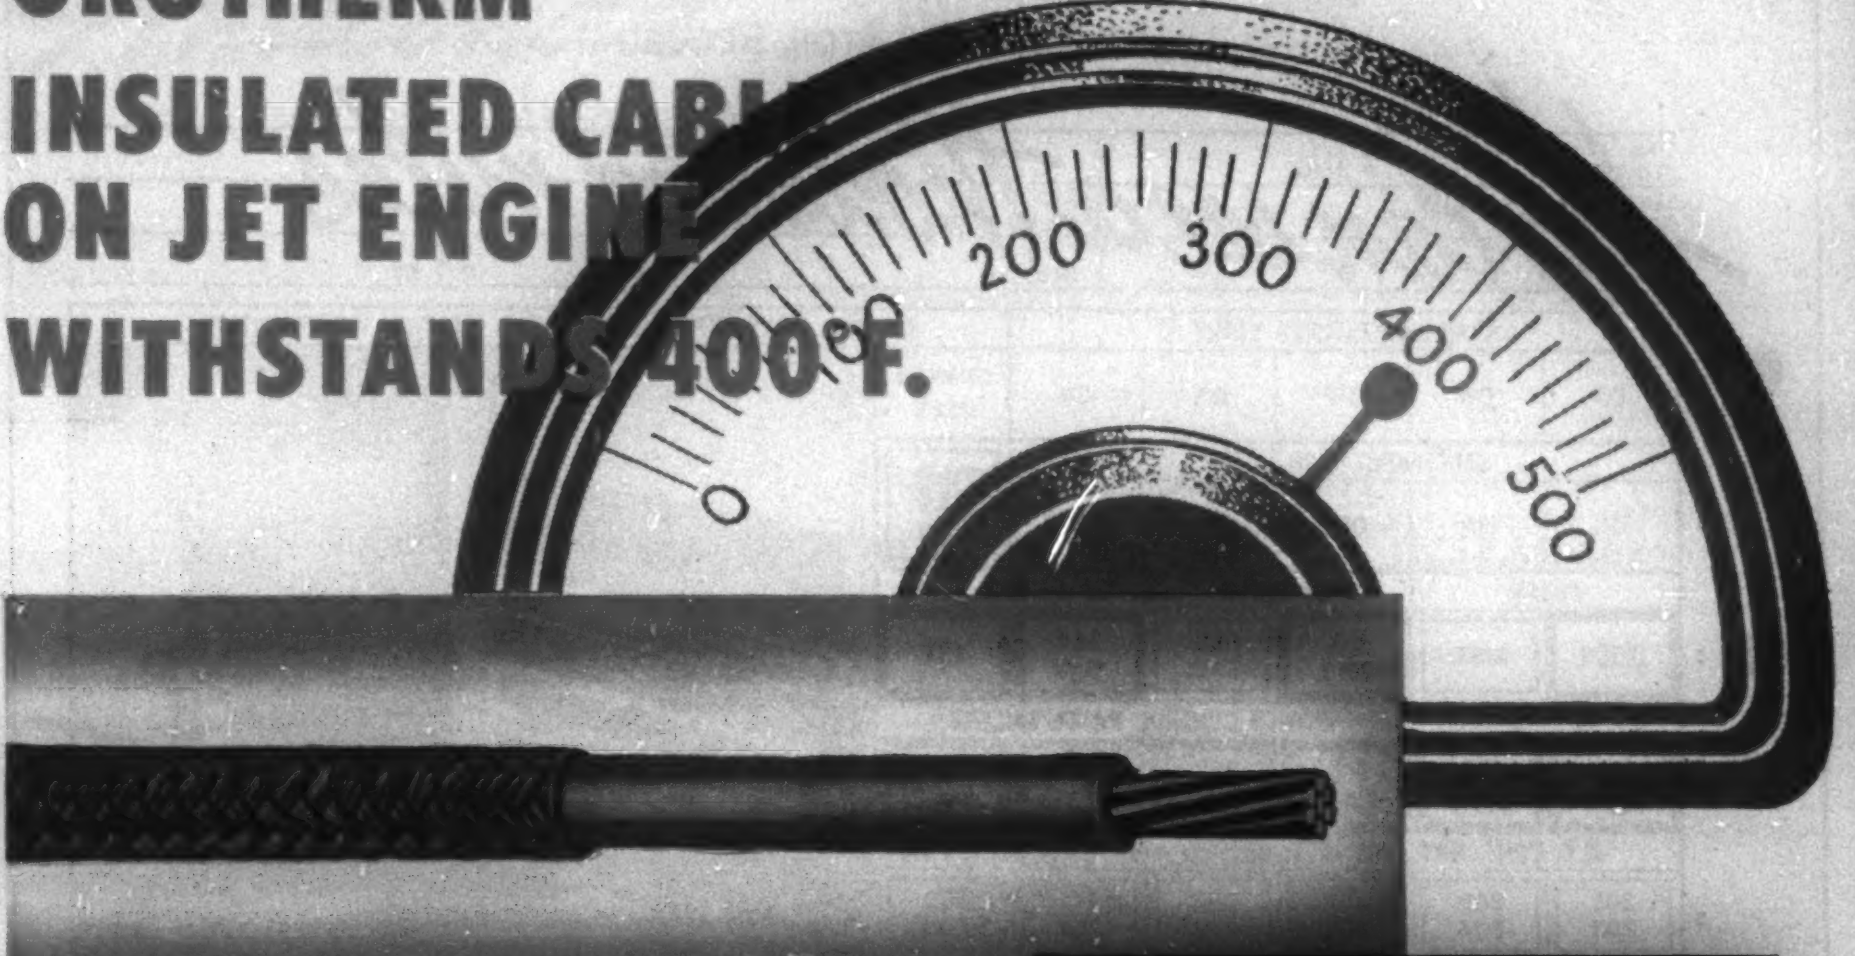

Okotherm cables for high temperature service can be made in a wide range of sizes and types, using glass, asbestos or other protective coverings.

Oven and freezing tests show that Okotherm insulation retains its properties over a wide temperature range where ordinary insulations fail due to loss of elastic properties or thermal instability.

THE REMARKABLE heat-resisting quality of Okotherm insulated cables has been highlighted by their adoption in a jet engine that develops temperatures as high as 400° F. As a result of intensive investigations by Okonite researchers of heat-resisting materials, it was found that ignition wire insulated with Okotherm would fulfill the requirements. Consequently it became the first to gain approval for the new engine.

Compounded with silicone, Okotherm insulation retains its dielectric strength after long-time exposure to high temperatures as well as those as low as —65° F. Okotherm insulation helps wiring withstand outdoor weathering without deterioration—keeping flexible at all operating temperatures, resisting oxidation and ozone.

In addition to high voltage ignition, cables with Okotherm insulation should be considered for electric ovens, furnaces and motors, high-intensity floodlights, street lights and neon signs—wherever excessive heat must be encountered.

If you should have no immediate use for heat-resisting Okotherm, some other special-purpose Okonite cable may fit your needs. "Unusual" cable installations have a way of turning out to be Okonite. Problem solving is our business. Why not talk over your cable problem with an Okonite engineer? The Okonite Company, Passaic, New Jersey.

THE BEST CABLE IS YOUR BEST POLICY 7118

OKONITE SINCE 1878 ***insulated wires and cables***

ALARM INDICATOR RECORD

He can see a thousand miles

TIME RECEIVED ... A P BY
SENDING OFFICE ... TROUBLE HOURS
RECEIVING OFFICE ... DATE OK ... TIME ... A P BY

	SYNCHRONIZATION - START					CA FAIL SEND CKT.	STATION IDENTIFICATION					
1	ON	ON	OFF	ON	ON	CHAN. 1 SECT						
	SYNCHRONIZATION - STOP											
2	ON	ON	OFF	ON	ON	FUEL GAS LOW						
	FUSES		24-VOLTS		ABS							
3	DISCH.	DIST.	H-L VOLT	REG. FAIL	24V 130V	48V						
	POWER CONTROL PANEL FAILURE											
4	201-202W	203-204W	205-206W	207-208W	201-202E	203-204E						
	ALT. CONT. BAY - NO VOLT. OUT.				NO VOLT. - TRAN							
5	201 202	203 204	205 206	207 208	201 202	203 204						
				RECTIFIER - INVERTER FAIL								
6	RECT. FAIL 24/130V	48 V H-L VOLT		NO. 1	NO. 2	NO. 3						
	64 KC PILOT ALARM AT NON-SW. MAIN								3096 (WKG. LINE) PILOT AT SW. MAIN			
7	201	202	203	204	205	206	207	208	201 203	205 207	202 204	206 208
	2064 KC PILOT ALARM AT NON-SW. MAIN								3096 (SP. LINE) PILOT AT SW. MAIN			
8	201	202	203	204	205	206	207	208	201 203	205 207	202 204	206 208
	3096 KC PILOT ALARM AT NON-SW. MAIN								SP. LINE FAIL AT SW. MAIN			
9	201	202	203	204	205	206	207	208	201 203	205 207	202 204	206 208
	TOT. LINE FAIL AT SW. MAIN				AUTO. SWITCH AT SW. MAIN				AUTO. SW. LOCKED AT SW. MAIN			
10	201 203	205 207	202 204	206 208	201 203	205 207	202 204	206 208	201 203	205 207	202 204	206 208

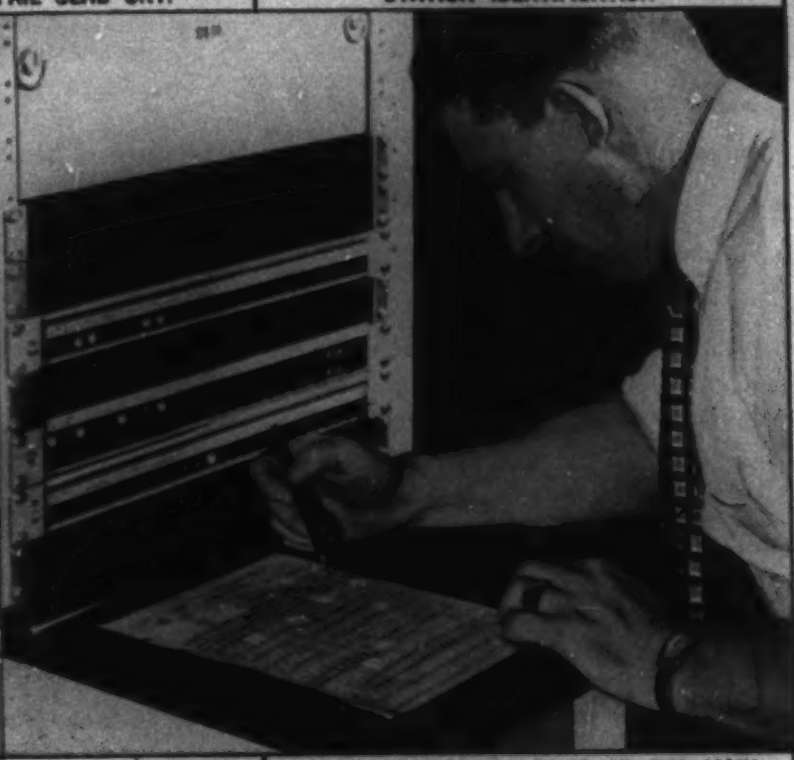

11
12
13
14

A B C D E F G H J K L M

CARRYING hundreds of telephone calls, coaxial cable runs through many lonely miles. Far from towns and people, master amplifying stations stand guard with a new automatic alarm system developed by Bell Telephone Laboratories.

At a city terminal, the man on duty makes a check by laying a transparent log sheet over a glass window, and dialing a master station hundreds of miles away. At once the station begins to give an account of itself, lighting lamps under the log sheet to report any abnormal operating condition before it becomes an emergency.

But when something happens that threatens serious trouble, the apparatus acts at once—maybe by switching in a spare coaxial—and calls a distant test board by ringing a bell. Sometimes he can take further steps by remote control; if not, he knows exactly how to brief the nearest repair crew.

With this new alarm system, maintenance men need not be stationed at isolated points, just waiting for something to happen. Instead, they live in their home communities. This makes for better work . . . and better telephone service.

BELL TELEPHONE LABORATORIES EXPLORING AND INVENTING, DEVISING AND PERFECTING, FOR CONTINUED IMPROVEMENTS AND ECONOMIES IN TELEPHONE SERVICE.

"*Anaconda*" ... always means

Keeping-Ahead-of-the-Parade

TAKE CB* CABLE WITH F-3 ALLOY SHEATH FOR INSTANCE:**

In 1939

Anaconda engineers introduced Type CB cable because ordinary paper-insulated cable wasn't good enough. Carbon-black paper removes oxidation products from the insulation, eliminates ionization discharges. These and other desirable properties increase insulation stability and assure longer cable life.

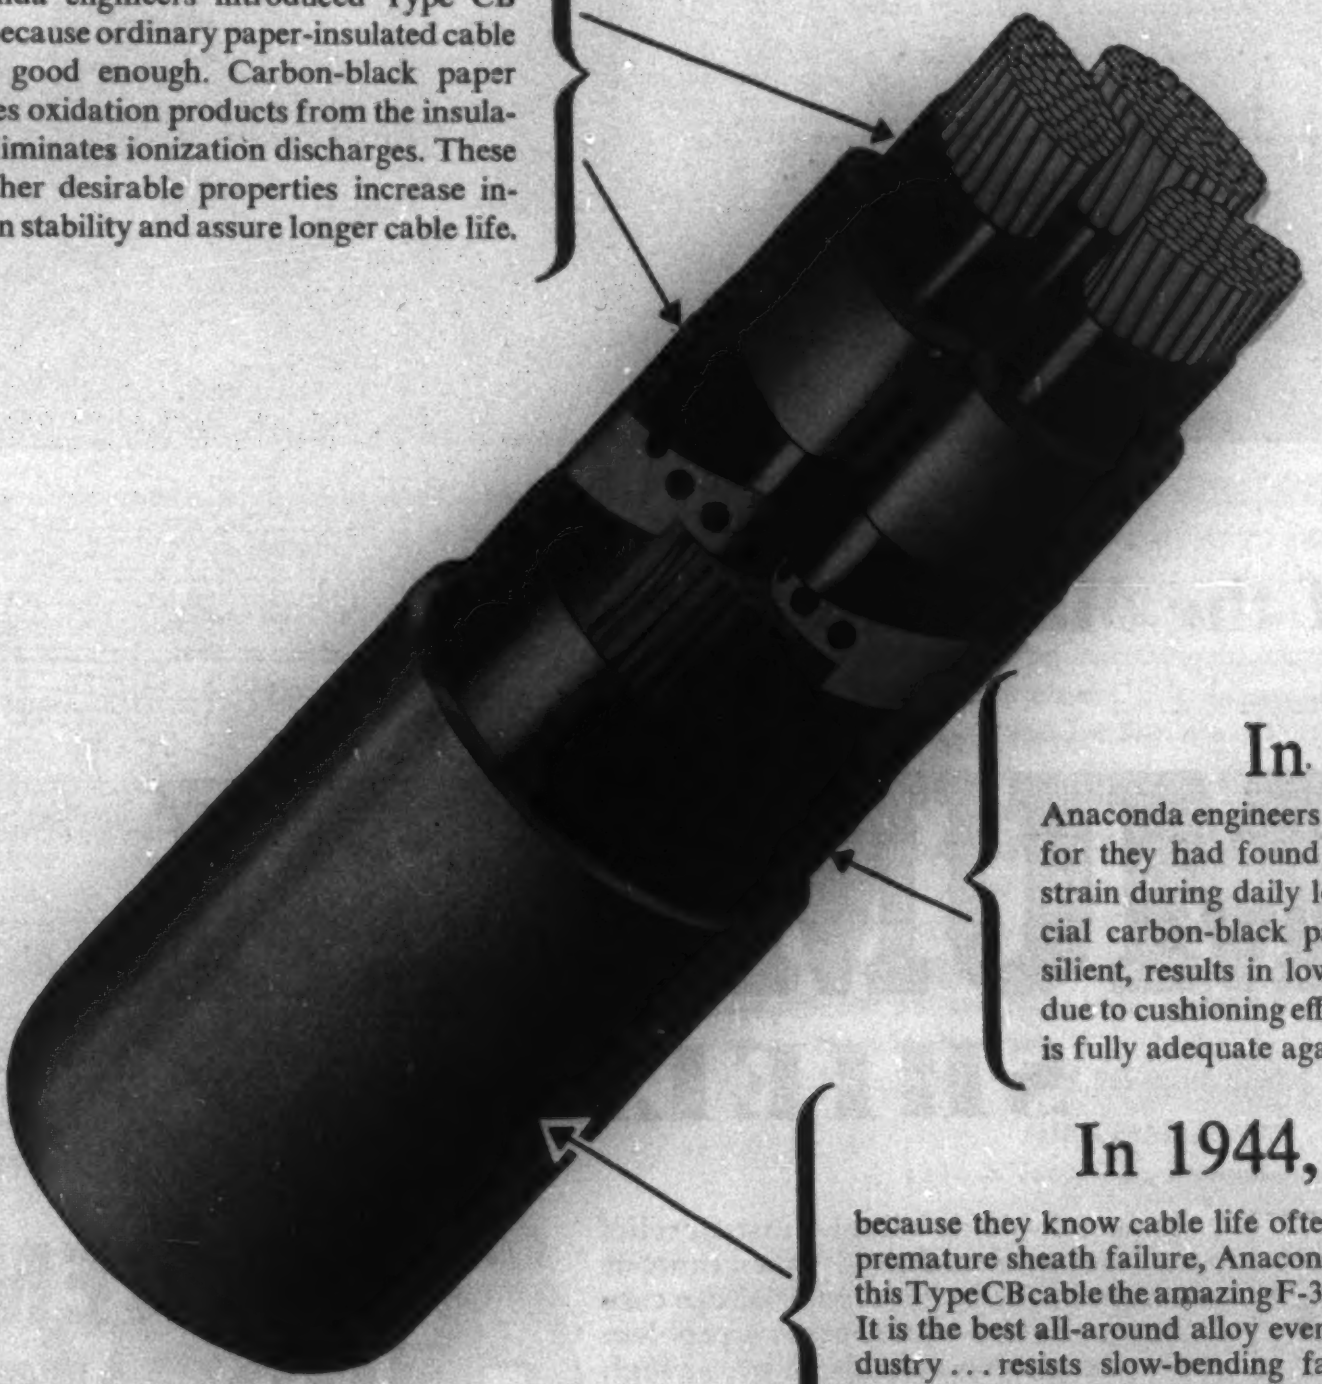

In 1944

Anaconda engineers added the resilient binder for they had found a way to reduce sheath strain during daily load cycles. Made of special carbon-black paper, it is strong yet resilient, results in lower stresses in the sheath due to cushioning effect, conducts radially and is fully adequate against magnetic forces.

In 1944,

because they know cable life often is shortened by premature sheath failure, Anaconda engineers gave this Type CB cable the amazing F-3 alloy-lead sheath. It is the best all-around alloy ever offered in the industry ... resists slow-bending fatigue, creep (expansion), bursting, abrasion, vibration fatigue and does not age-harden ... actually extends sheath life more than three times ordinary sheath. It has truly earned the name "indefatigable."

*CB—Carbon-Black, Trade Mark Registered U. S. Patent Office
**F-3—Arsenic-Lead alloy (U. S. Patents 2,300,788 and 2,374,755)

THIS COMBINATION permits heavier loads for longer life!

ANACONDA WIRE & CABLE COMPANY
25 Broadway, New York 4, N. Y.

Get out of the Magnetic Doghouse

with MUMETAL SHIELDS

Write for

BLUE SHEETS

on Allegheny Ludlum Electrical Materials

Complete, laboratory-certified data on each grade—its physical properties, electrical characteristics, uses, methods of handling, etc. Write for Blue Sheets on the materials in which you are interested.

ADDRESS DEPT. E-79

Mumetal shields will give instant relief to interference caused by extraneous magnetic fields. This material can cure many troubles—solve many a problem for you. Always consider it where high permeability is required at low flux densities, such as in input and microphone transformers, hearing aid diaphragms, instruments, wire and tape recorders, etc. For properly heat treating Mumetal, we can also offer commercial hydrogen annealing facilities.

A fund of technical data on shields and other applications for Allegheny Mumetal is available—let us help with your problems.

ALLEGHENY LUDLUM
STEEL CORPORATION
Pittsburgh, Pa.

Steel Makers to the
ELECTRICAL INDUSTRY

AL

WAD 2870

NEW . . .

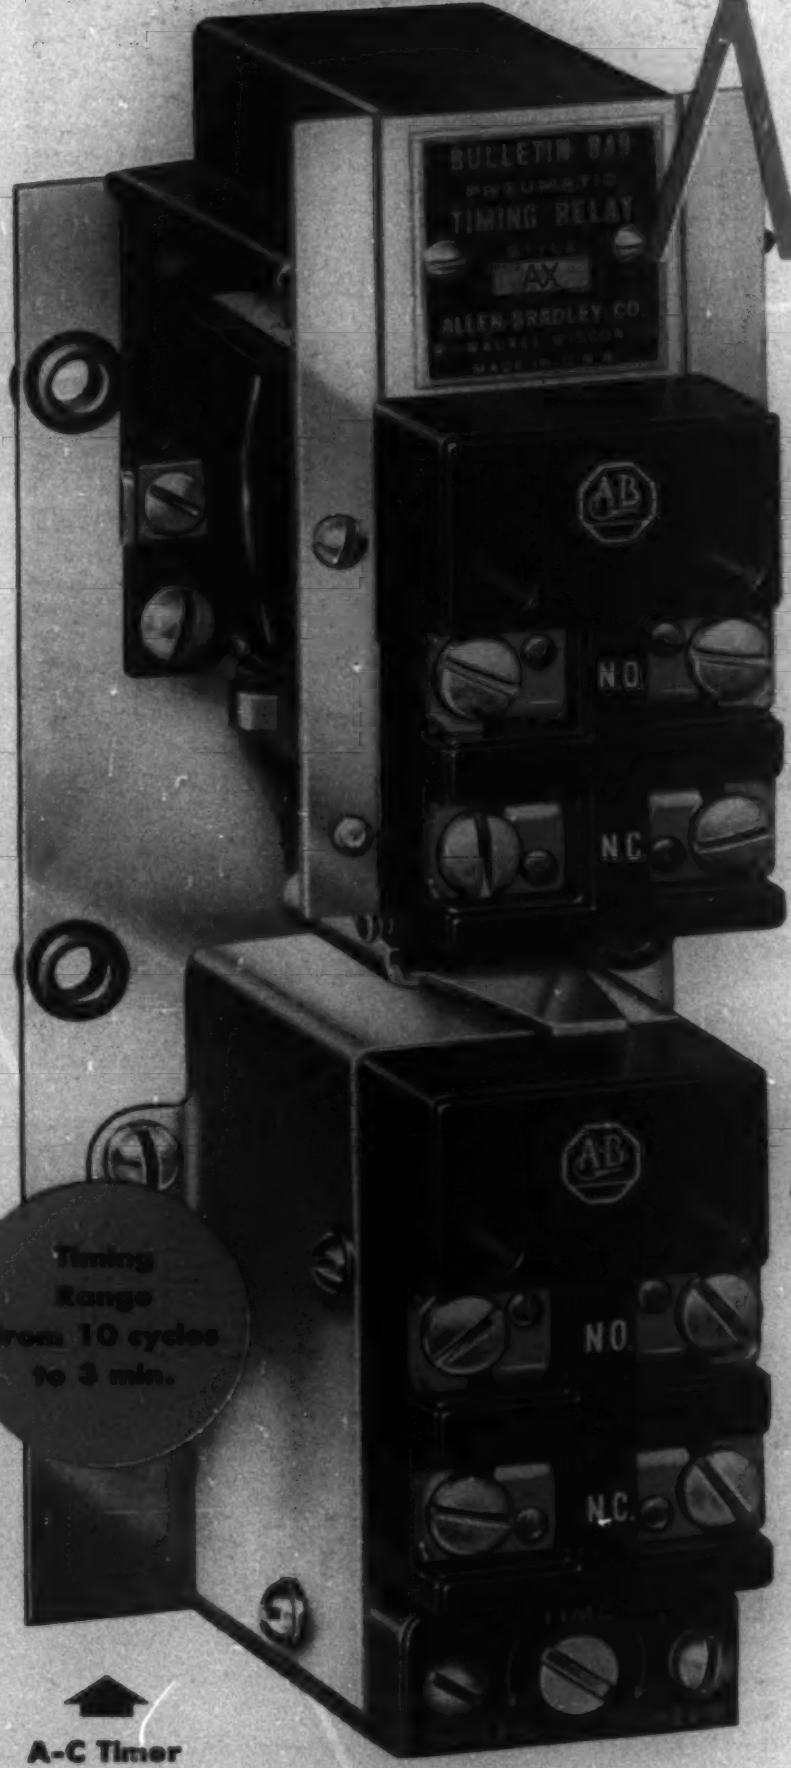

A-C Timer with Auxiliary Contacts

Bulletin 849

PNEUMATIC TIMING RELAY

Good for *Millions* of Operations

- ✓ FOR "DASH UP" OR "DASH DOWN" OPERATION
- ✓ AVAILABLE FOR NEMA TYPE 1, 4, 7, and 9 APPLICATIONS

This new, compact, solenoid type, pneumatic timing relay utilizes a synthetic rubber bellows for controlling the tripping time. Has a range of from 10 cycles to 3 minutes, and an accuracy of approximately ±10%. Its setting is easily adjustable over a wide range, and the relay resets instantaneously. This timer will provide satisfactory operation irrespective of temperature, humidity, or vibration conditions. Available with quick make and quick break, double pole, silver alloy main contacts—one set normally open and one set normally closed. Terminals are readily accessible from the front. A duplicate set of contacts for pilot control can also be provided, actuated directly from the solenoid. The unit can be readily changed from "dash up" to "dash down" operation by simply inverting the solenoid. Write for information on this new Bulletin 849 Pneumatic Timing Relay.

ALLEN-BRADLEY CO.
1316 S. Second St., Milwaukee 4, Wis.

D-C Timer



ALLEN-BRADLEY
QUALITY
MOTOR CONTROL

OTHER RELIABLE

TIMING RELAYS

TO FIT YOUR REQUIREMENTS



BULLETIN 850
MOTOR DRIVEN TIMING RELAY

Designed for timing comparatively long intervals with a high degree of accuracy where high speed recycling is not required. Furnished in several ranges with a maximum time delay of from 1 to 15 minutes. Variations in time between successive operations are less than 1% of the full scale range. Its synchronous motor is suitable for a-c pilot control service only. Has a single pole switch for normally open or normally closed operations.

BULLETIN 850
TYPE L LAUNDRY TIMER

Similar in design to the Bulletin 850 Motor Driven Timing Relay, this timer is specially designed for controlling washing machines and other equipment where the motor is run for a given period in one direction, reversed, and then run in the opposite direction.



BULLETIN 852
ELECTRONIC TIMING RELAY

Designed primarily for exact timing in frequent operation. It has a range of 20 to 1 and is provided in eight timing ranges with from ½ second up to 2 minutes maximum time delay. The reset time is approximately one-tenth of the maximum time delay. This is a flexible timer that can be recycled rapidly over long periods. Furnished with two normally open, two normally closed, or one normally open and one normally closed contacts.

BULLETIN 848
FLUID DASHPOT TIMING RELAY

Here is a magnetic type timing relay that combines simplicity, dependability, and low cost. It can be used in many applications where reliability is more important than exactness of timing. Operates at ambient temperatures from +120 F to —30 F without undue variations in timing. Has an adjustable range from 2 to 20 seconds and is available for a.c. or d.c. . . . in single pole construction . . . with either normally open or normally closed contacts.

ALLEN-BRADLEY

MOTOR CONTROL

Write for New Timer Bulletin

Allen-Bradley Co.,
1316 S. Second St.,
Milwaukee 4, Wis.

Everything you need...

for Electrical Resistance Measurement

FROM .01 OHM UP TO 1000 MEGOHMS

In One "Megger"* Unit

The "BRIDGE-MEG" Resistance Tester

Here is a combined "Megger" Insulation Tester and Wheatstone Bridge that has been proved by years of service, and that can be used to measure almost any resistance encountered in routine maintenance work—anywhere and at any time. It measures *conductor resistance* from as low as .01 ohm up to 999,990 ohms, and can be supplied with Varley Loop test facilities. It measures *insulation resistance* from 10,000 ohms to as high as 1000 megohms. A rotary switch permits instant selection between insulation resistance and Wheatstone Bridge functions. Having a self-contained hand generator, it is independent of batteries or outside source of power supply. Various ratings, 250, 500 or 1000 volts d-c. The set is portable, compact and simple to operate.

The "Bridge-Meg" Resistance Tester is fully described, fully illustrated in a 12-page bulletin available to you at no obligation. We would be pleased to send you a copy. Ask for Bulletin 21-60EE.

*REG. U. S. PAT. OFF.

JAMES G. BIDDLE CO.

Electrical & Scientific Instruments

1316 ARCH STREET, PHILADELPHIA 7, PA.

New load-center unit

Shorter shipments, when you order 'Selected Standards'

Typical 500 kva G-E *selected standard* load-center unit substation (standard arrangement). Unit consists of primary interrupter switch, liquid-filled transforming section, and low-voltage feeder switching section with the new Type AK-1 drawout air circuit breakers. Reverse arrangement is also available at same price.

Typical 500 kva G-E *selected standard* load-center unit substation with liquid-filled transforming section, metal-clad air power circuit breaker for incoming line-protection, and low-voltage feeder switching section with the new Type AK-1 drawout air circuit breakers.

G-E *selected standard* double-ended load-center unit substation rated 1500 kva with primary interrupter switches, liquid-filled transforming sections, and low-voltage feeder switching section with G-E Type AK-1 drawout air circuit breakers arranged for secondary selective service.

Based on surveyed demands of industry and proposed NEMA specifications, *selected standard* ratings have been introduced by General Electric to bring you these efficient new load centers on shorter shipment. The most popular *selected standard* ratings are . . .

Low voltage	480Δ or Y, 208Y/120 volts
High voltage	2.4, 4.16, 4.8, 12, 13.2, 13.8 kv, delta
Kva ratings	300, 500, 750, 1000, 1500, 2000

Certain other *selected standard* load centers are available. Contact your G-E sales representative for further information.

SHORTER SHIPMENTS By ordering *selected standards*, you get 20 per cent shorter shipments on Pyranol and dry-type load centers. Deliveries are in line with average plant construction schedules and it is suggested that load centers be ordered when construction begins.

HIGH IMPULSE LEVELS Pyranol unit substations with their inherently high impulse levels are particularly suitable for locations that are subject to switching surges and lightning.

ECONOMICAL, too, is a G-E load-center power distribution system . . . no heavy, costly low-voltage feeders, no "piecemeal" purchases, no divided responsibility.

SAVE TIME, also, because G-E *selected standard* load centers eliminate weeks spent over drawing boards detailing individual items; you'll save time because G-E factory-assembled unit substations are quickly and easily installed—in the center of the load area—with lower material and labor costs then required for "piecemeal" assemblies.

Ask your G-E sales representative *today* about how *selected standard* load centers can save time and money in *your* plant. Also, write for Bulletins GEA-3592 and GEA-3758. *Apparatus Department, General Electric Co., Schenectady 5, New York.*

substations give you . . .

Improved appearance at no extra cost!

Note the smooth, integrated appearance of these new General Electric Pyranol* unit substations . . . no more gawky, "old-type" stovepipe connections between transformer and switchgear . . . now you can get the effortless flow of line and power that characterizes quality equipment for locations where appearance is a requisite. All these features at the same price as previous units.

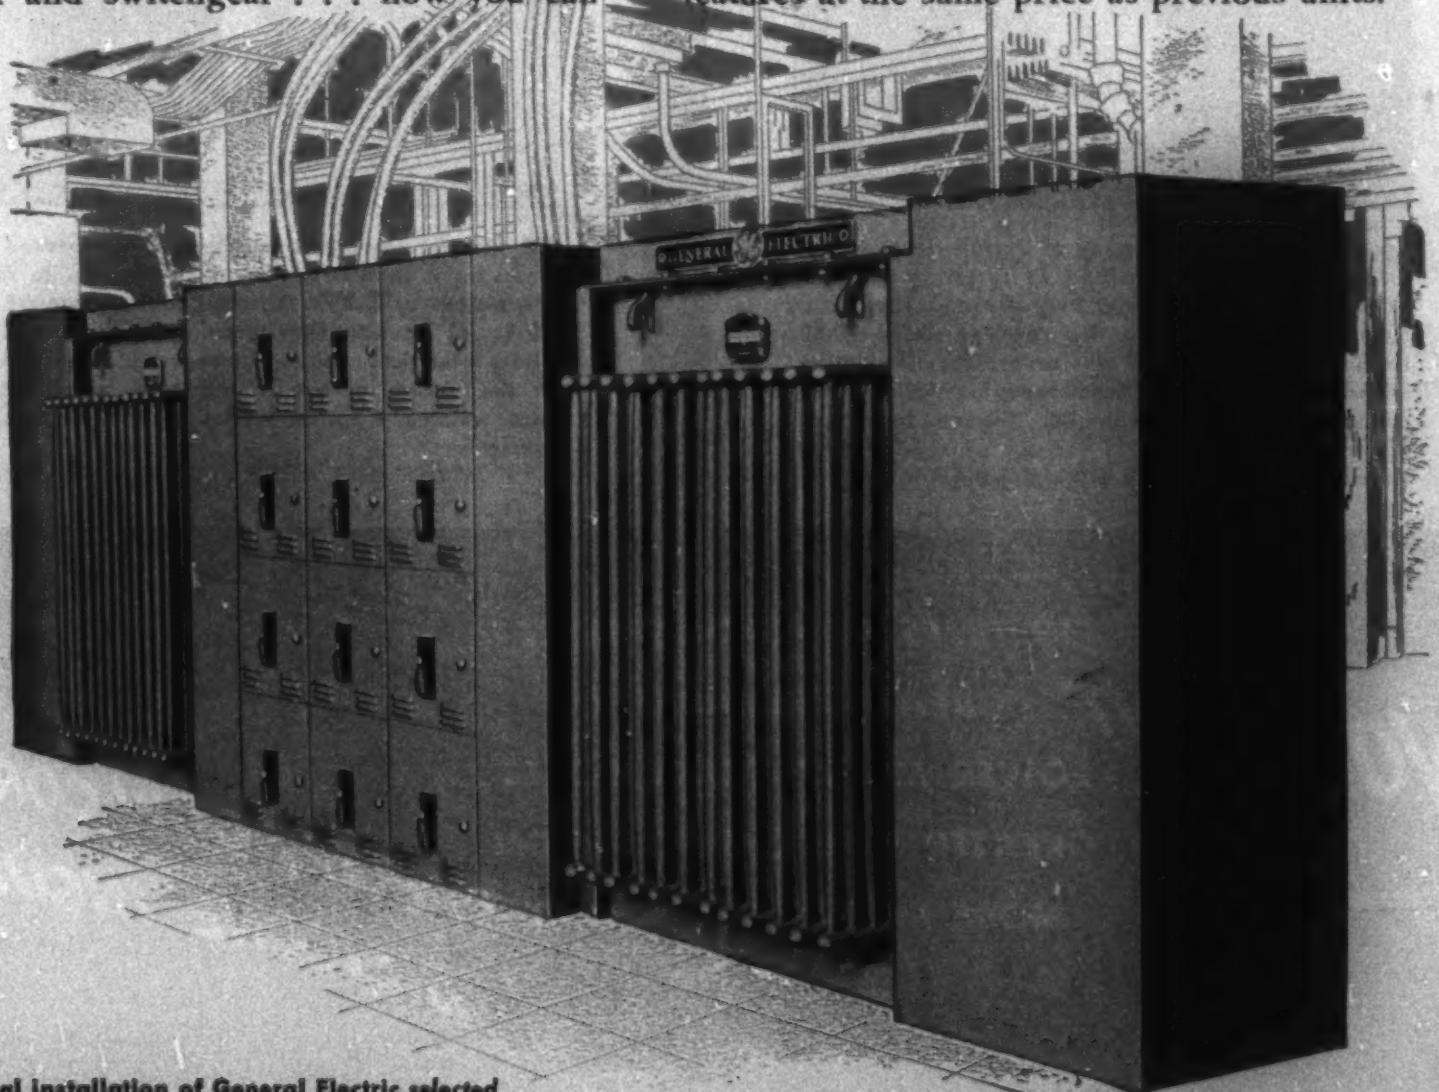

Industrial installation of General Electric selected standard double-ended load-center unit substation rated 1500 kva, 4160 volts, 208Y/120 volts. Unit has oil cutout in incoming line sections, Pyranol-filled transformers, and the new AK-1 drawout air circuit breakers.

*Reg. U.S. Pat. Off.

★ *Be sure to see the "More Power to America" full-color sound slidefilm "Modern Industrial Power Distribution." Ask your G-E sales representative to arrange a showing for your organization.*

GENERAL ELECTRIC

DOW CORNING SILICONE ELECTRICAL INSULATION

Increased the Life of this motor 10 TIMES

Cogsdill Twist Drill Company of Detroit developed a unique drill grinder. Instead of reversing the carriage by a cam or crank, they use a 1 h.p. 1200 r.p.m. motor to reverse the carriage drive 50-60 times a minute. In this service ordinary insulation lasted only 5 weeks. After repeated failures the motors were wound with DC Silicone Insulation. Now after more than 11 months of service these silicone insulated motors are still going!

Reduced the weight of this transformer 35%



DC Silicone Insulation together with improved core steels have enabled Kuhlman Electric Co. to reduce the weight of 3 KVA distribution transformers from 70 to 45 pounds. Dow Corning Silicone Insulation offers electrical engineers unprecedented freedom in the design of similar dry type distribution or spot welding transformers as well as motors and generators.

IF YOU WANT

10 TIMES AS MUCH SERVICE
GREATER RELIABILITY
LOWER MAINTENANCE COSTS
GREATER FREEDOM IN DESIGN
MORE POWER PER POUND

SPECIFY DOW CORNING SILICONE INSULATION

IF YOU HAVE an insulation problem involving high temperatures, heavy overloads or excessive moisture, contact our nearest branch office or write for bulletin No. K-9.

DOW CORNING CORPORATION • MIDLAND, MICHIGAN

Dow Corning
FIRST IN SILICONES

ATLANTA • CHICAGO • CLEVELAND • DALLAS • LOS ANGELES • NEW YORK CITY • CANADA: *Fiberglas Canada, Ltd.* • ENGLAND: *Albright & Wilson, Ltd.*

Can Engineers Be Synchronized?

JAMES F. FAIRMAN
PRESIDENT AIEE

CAN ENGINEERS be synchronized? Can they be persuaded to pull together, to co-operate, to pool their talents and resources in an orderly, organized effort to attain common objectives outside their several fields of specialized technology? In spite of appearances and experience to the contrary, many of us believe they can be so persuaded, and because we believe, we persist in our endeavor to find the right formula and to supply the requisite leadership. Those of us who participated in the discussions held at Section, District, and general meetings of the Institute some three years ago were tremendously encouraged by the interest and response of our own Institute members and by their evident willingness to relinquish some of the Institute's autonomy for the sake of forming an over-all organization of the engineering profession.

ACTION TAKEN

The questionnaires returned at those discussion meetings were summarized and conclusions drawn by our Professional Activities Subcommittee in a report published in the May 1947 issue of *Electrical Engineering* (*pages 496–501*). Since then, members have frequently asked what has been done about it. For the record, I answered that question at the Annual Meeting in Swampscott. The answer appears in *Electrical Engineering* for August 1949 (*page 693*). In brief, your Board of Directors referred the report to Engineers Joint Council; that body appointed a Committee on Unity to consider our report and other suggestions; the Committee on Unity recommended that an invitation be issued to 15 of the larger, national engineering societies to appoint representatives to an exploratory conference to be held in October; and the Council accepted this recommendation and issued the invitations.

In the May 1947 issue of Electrical Engineering the Subcommittee on Professional Activities of the AIEE Committee on Planning and Co-Ordination published a summary of a report on "Organization of the Engineering Profession." The report indicated the great desire of AIEE members for greater unity of the engineering profession. President Fairman here indicates how such professional unity can be achieved.

To bring the answer up to date, your Board of Directors accepted the invitation and appointed Mr. Titus G. LeClair to be our representative. As chairman of the Professional Activities Subcommittee when our study was made, Mr. LeClair has the complete background and an intense interest in the problem. He also possesses to an unusual degree the personal qualities necessary for this assignment. We are fortunate that he is available and willing to undertake it.

It would be idle to speculate about the possible results of the exploratory conference. From a realistic but not at all pessimistic point of view, it is only another step on the road to better understanding among the several engineering societies and among their members which we hope will lead to greater unity of the engineering profession.

While pressing forward to that goal, we must not neglect the day to day problems which deserve our attention. We dare not let them wait on the perfection of an over-all organization. We can and we must work together with our brethren in other engineering societies on our common problems. Through such day to day co-operation, we shall not only take better care of our immediate concerns but we shall hasten the day when we shall attain that more perfect professional unity to which we aspire. Sometimes I wonder if we have put too much emphasis on the matter of organization on the assumption that if we could devise the right kind of organization all our problems would automatically be solved. Of course, this is not so. An organization is only a means to an end; an instrument or tool, by the use of which a group of people having common interests hope more readily to attain their objectives. We should look upon our organizations as tools. We should use them to their full capacities and by using them determine their limitations as well as their merits. We should modify them to meet new situations and we should scrap them when they are obsolete or worn out. Perhaps the difficulty lies not so much with our organiza-

---

Essential substance of an address presented at the AIEE Pacific General Meeting, San Francisco, Calif., August 23–26, 1949.

James F. Fairman is Vice-President, Consolidated Edison Company of New York, Inc., New York, N. Y.

tions as with us. We seem to agree more fully on the problems to be solved than on the methods to be used in solving them. Our concern for the proper tools to be used may divert our attention from the job to be done and delay its execution. It may be that our societies become so identified with our sentiments and our prejudices that we are blind to their limitations and delay a much needed job of renovation or renewal. It may be that we are more concerned about who shall get the credit than we are about getting the job done.

There is work to be done. Why not use the tools at hand to the best of our ability? Why wait for a more perfect instrument before tackling the job? Why not work together, each using the means he prefers but being careful to use our skills and our chosen instruments in the common cause rather than to handicap or discredit the work of our brethren who happen to prefer different tools?

It seems to me there are two types of organizational tools available and ready for use. I shall refer to them in the same order in which they were discussed in our subcommittee's report. I refer to our old friends plans *B* and *C*.

PLAN *B*

Plan *B* called for the continuance of the present national engineering societies, such as the Institute, as autonomous organizations to cover their respective fields of engineering technology and for a separate, individual membership organization to take care of the nontechnological problems of the profession. There is an organization of this latter type, the National Society of Professional Engineers. Each of the component units of that organization, the local chapter, the state society, and the national society, is responsible for the activities in its own geographical sphere. Each is responsible to the individual member who has a direct voice in electing its officers and developing its policies.

The state society is not primarily a federation of local chapters but rather an organization of all the individual members of all the separate chapters in a state and is designed to handle state-wide problems beyond the scope of an individual chapter. Similarly, the national society is not only a federation of state societies but an organization of individual engineers designed to serve the profession on national problems which transcend state boundaries.

PLAN *C*

Plan *C* is based on the local engineering or technical societies council, of which an increasing number have been organized in recent years. A local council usually consists of representatives of the local units (chapters, sections, and so forth) of the several national engineering societies, to which may be added representatives of local engineering clubs and scientific or technical societies, either local or national in scope. A local council is not an organization of individual members but, as its name implies, a council of representatives from a number of completely autonomous societies. Its authority is limited to that specifically conferred upon it by the participating organizations. The individual members of the organizations represented on the council have no direct voice in its affairs. Its activities are necessarily local in scope, except as it may effect a working arrangement with other local councils in a state or region.

Ultimately these local councils may be grouped into state or regional councils and the state or regional councils into a national council. A national council, known as Engineers Joint Council, and consisting of representatives of five of the major national engineering societies including the Institute, has been functioning for several years and would logically be the nucleus around which plan *C* could develop.

These two tools are intended to serve the same purpose. They are relatively new tools and we are inexperienced in their use. Both can be improved. One may prove to be better for our purpose than the other. But each of us should use one or both of them now to the best of his ability rather than debate about their relative merits.

PLAN *D*

The essence of the over-all organization as proposed by the Institute's subcommittee in plan *D* is that it shall be of the individual membership type with the continuation of affiliated individual membership societies for specialized technical purposes only, the latter being the present national engineering societies which will continue to function in their respective technical fields and will have a voice in proportion to their membership in the affairs of the over-all organization. The individual members of the over-all organization may or may not be members of one or more of the affiliated technical societies and presumably an individual may be a member of one or more of the technical societies without being a member of the over-all organization. Members of the over-all organization will be members of the local and regional units of the over-all organization.

It is worthy of note that plan *D* combines the principal elements of plans *B* and *C*. Depending on one's point of view, plan *D* may be said to be either plan *B* or plan *C* with certain more or less desirable additions. On the questionnaire used by our committee at Section, District, and general meetings where the several plans were discussed, the most frequent comment was to the effect that plans *B* and *C* were only intermediate steps toward plan *D*. Some members favored plan *B* as an intermediate step, some favored plan *C*. A few suggested taking both steps in parallel to hasten the day when plan *D* might be made effective. Some were satisfied that plan *B* was all that was necessary, others were equally sure that plan *C* was the right answer but the larger number favored plan *D* as the ultimate solution to the problem of professional organization.

PATIENCE NEEDED

Can engineers be synchronized? In spite of this apparent diversity of opinion among the members of the Institute, my answer is still—yes; but it will be a gradual process. The fact that we must synchronize not only the members of the Institute but the members of other engineering societies means that it will take time. It will require patience, persistence, study, and above all, courtesy and good will.

We must exercise these qualities as individuals and as organizations. We must try to understand the other fellow's point of view, we must be willing to give and take, we must desire professional unity enough to make the sacrifices necessary to achieve it.

The Bell Computer, Model VI

E. G. ANDREWS

Controlled from remote stations, this new digital computer of the relay type reduces punched-tape instructions to a minimum. With novel control features similar to those used in recent automatic dial-telephone developments, this "upper-class" computer possesses six "intelligence levels." Subordinate levels are capable of solving problems such as complex-number multiplication without special guidance.

THE Bell Telephone Laboratories has placed in operation a new digital computer in its Murray Hill, N. J. building. It is called the Bell Computer, Model VI* because it is the sixth type of the seven relay computers designed and built by the Bell Laboratories. It includes the desirable features of its predecessors as originally conceived and placed into practice by Dr. George R. Stibitz and Samuel B. Williams. It also includes innovations that past experience and recent Bell Laboratory developments have shown to be desirable. Physical aspects, arithmetical aspects, principal usage, and unique and novel control features of the computer will be discussed in this article, with particular attention being given to the last item.

PHYSICAL ASPECTS

The Model VI computer consists of two principal parts: the remote control stations located in the quarters of the computing staffs, and the computing equipment located in another part of the building. A switchboard cable of the type used in telephone central offices is used to provide for the exchange of information between the two locations.

Figure 1 shows a remote control station. The three pieces of apparatus shown are types which are used extensively in teletype printer telegraph systems, with minor changes to adapt them to computer operation. The printer on the movable table records the answers to the problems; the hand perforator is used for perforating the data on the problem tapes; and the tape reader transmits the data for the problems to the computing equipment.

There are provisions for three of these remote control stations, although only two have been provided initially and one of these is used jointly as a test station and control station. The usual lock-out feature is provided to insure that one station cannot interfere with another that already may be in operation.

The computing-room contains 12 bays of equipment, consisting almost entirely of the heavy-duty-type relays used extensively in earlier computers and in telephone dial systems central office equipment. The frames have light grey enamel finish and other characteristics which make them resemble equipment that is found in the modern telephone office. There are about 4,300 relays, 86 cold-cathode tubes, and relatively small amounts of other miscellaneous apparatus used. As in the case of other Bell Telephone Laboratories computers, an indicator panel with approximately 600 small lamps is provided for showing the progress of various computing operations and for showing the numbers in various parts of the computer. It is illustrated in Figure 2.

This panel also has provisions for inserting instructions into the computing program on a manual basis where necessary to make corrections in programming. These facilities are used also for making tests under closely controlled conditions.

ARITHMETICAL ASPECTS

In any discussion about the arithmetical aspects of a computer, there usually are many questions about the detailed mechanization by which arithmetical operations are carried out. It is a phase of computer design and development which holds a maximum of fascination for the development engineer as well as for the interested scientist or mathematician. Therefore, even though there are no sensationally new arithmetical features in this computer, the changes do warrant mention. The range of numbers can be understood best by referring to Table I which compares number representations in the Model VI computer with those in the Model V computers installed at the Ballistic Research Laboratory at Aberdeen, Md., and at the Langley Field Laboratory of the National Advisory Committee on Aeronautics.

Table I. Comparison of Number Representations in Model VI and Model V Computers

Item of Comparison	Model VI Computer	Model V Computer
Number of digits for a number	3, 6, or 10	1, 2, 3, 4, 5, 6, or 7
Form of number notation for π, as an example	$+3.14159\ 2654\times10^{+00}$	$+0.3141\ 593\times10^{+01}$
Maximum number*	$\pm9.99999\ 9998\times10^{+19}$	$\pm0.9999\ 998\times10^{+19}$
Minimum number**	$\pm1.00\times10^{-19}$	$\pm0.1\times10^{-19}$

* The next higher number is the calculator's concept of infinity.

** The next lower number is the calculator's concept of zero. However, smaller numbers with the −19 exponent are possible with special problem coding.

By allowing only 3-, 6-, and 10-digit numbers to be intro-

---

* Previous Bell computers have not carried model numbers, but numbers that are now assigned to them in retrospect are

Model I.	Complex Number Computer
Model II.	Relay Interpolator[1]
Model III.	Ballistic Computer at Fort Bliss, Tex.[2]
Model IV.	Ballistic Computer at Naval Research Laboratory
Model V.	General Purpose Computers at Langley Field and Aberdeen[3, 4]

Essentially full text of a conference paper recommended by the AIEE Computing Devices Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Summer General Meeting, Swampscott, Mass., June 20–24, 1949. Not scheduled for publication in AIEE *Transactions*.

E. G. Andrews is with the Bell Telephone Laboratories, New York, N. Y.

duced instead of any number of digits, some flexibility has been sacrificed in the Model VI, but it has been more than compensated for by the simplification in design detail. The new form of notation with the decimal point between the first and second digits has been introduced for two reasons: to simplify the isolation of the characteristic of logarithms, and to bring the notation into agreement with that now commonly used in expressing values in scientific literature. Heretofore, operators of our earlier computers were obliged to write, for example, the temperature coefficient of expansion of silver as 0.188×10^{-4} instead of the more usual 1.88×10^{-5}. This difference has been known to lead to confusion and errors in transcribing.



Figure 1. Remote control station equipment

Left to right: Hand perforator, attendant seated at operating table, and printer

It will be noted that the floating decimal point has been retained along with the power of 10 (exponent) range of +19 through to −19. The calculator performs all arithmetical operations, namely addition, subtraction, multiplication, division, and square root.

PRINCIPAL USAGE

When first conceived, the principal use of the Model VI computer was intended to be for performing the mathematical analysis of the characteristics of complicated networks of telephone and radio circuits, and for a relatively small amount of general purpose computing. Some types of network problems involved are computation of insertion characteristics of filters, equalizers, element deviation studies.

It is now contemplated, however, that a considerable portion of the computing will be on problems involving matrix calculations, including integral equations and solutions of simultaneous equations. Numerous problems are contemplated which require solution of differential equations, both ordinary and partial. Some table-making projects are desired, but they are likely to be deferred because of more urgent computations that will contribute more to the development projects immediately at hand.

UNIQUE AND NOVEL CONTROL FEATURES

The unique and novel control features introduced into this computer have been taken in part from recent developments in the automatic dial-telephone switching technique. But before enumerating these new features, it should be emphasized that the Model VI computer is as error proof as its immediate predecessors. Our engineers with justifiable pride still can say, "Starting with the Model III delivered to the Armed Forces in 1944, not one of our customers has reported their computers giving out a wrong answer as a result of a machine error." Also, before enumerating the new control features, reference will be made to Figure 3 which shows the relationship between the routine control circuit and the other computer components. They are fundamentally the same as for other Bell Telephone Laboratories computers. To solve a problem, operators perforate the problem data and computing instructions on a teletype tape. This is loaded into the tape reader at a remote control station. Computing starts when the operator depresses a start key at this station.

Initially the problem control circuit carries out certain conditioning operations as instructed on the tape, and then delegates control of computing operations to the central organ labelled "Routine Control." This component proceeds to control operations for computing or printing of answers and so forth, as directed by instructions from the tape.

The instruction on the tape may be in either of two forms. One provides all of the detailed computing instructions, and the other merely indicates which of the several sets of internal instructions is to be used. The first form usually will be used for types of problems that are encountered infrequently; the second, for types of problems that are expected to occur often. This will be discussed further in subsequent paragraphs.

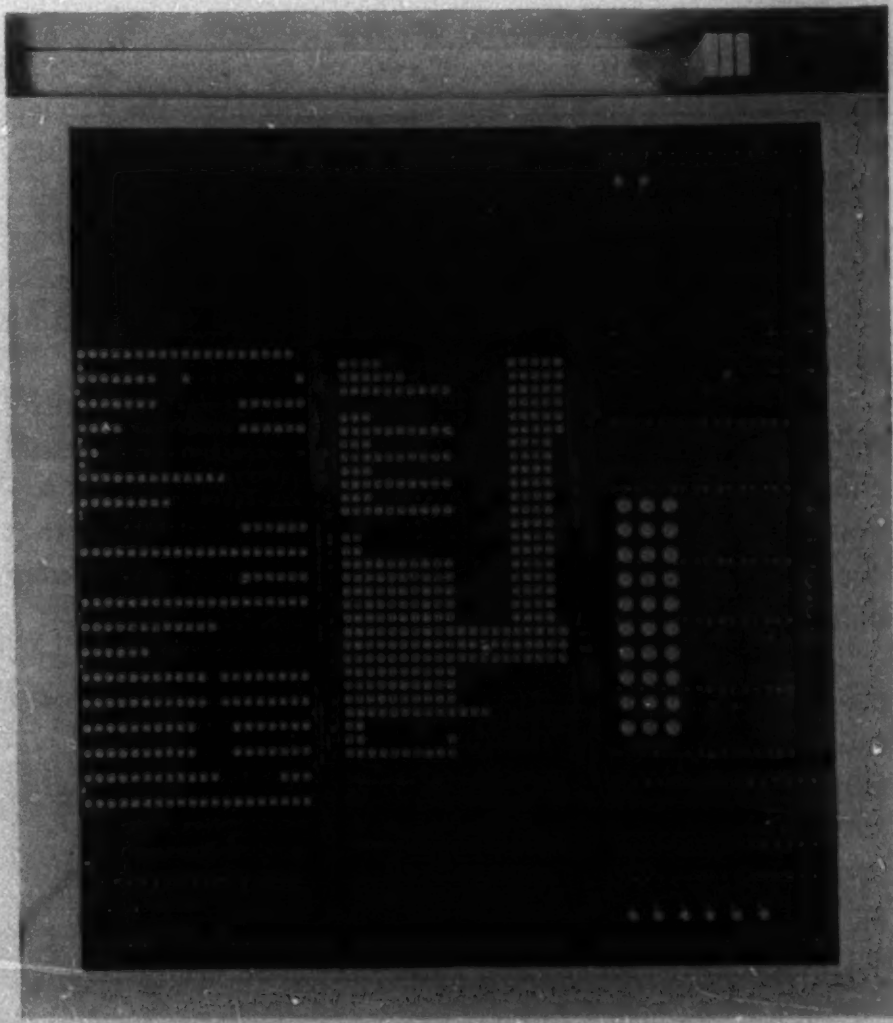

Figure 2. Indicator and test pane

The routine control circuit, in accordance with the instructions it receives, causes numbers to be passed from one register to another over the two 86-wire multiples or busses shown around the edge of Figure 3. When an arithmetical operation is required, the routine control designates the registers which hold the two numbers involved and directs the calculator to accept them and perform the desired arithmetical operation on them. The control circuit then indicates what disposition is to be made of the result in the calculator by designating the place to which it is to be transferred, that is, some particular register, the printer, or perforator. So much for general operating principles.

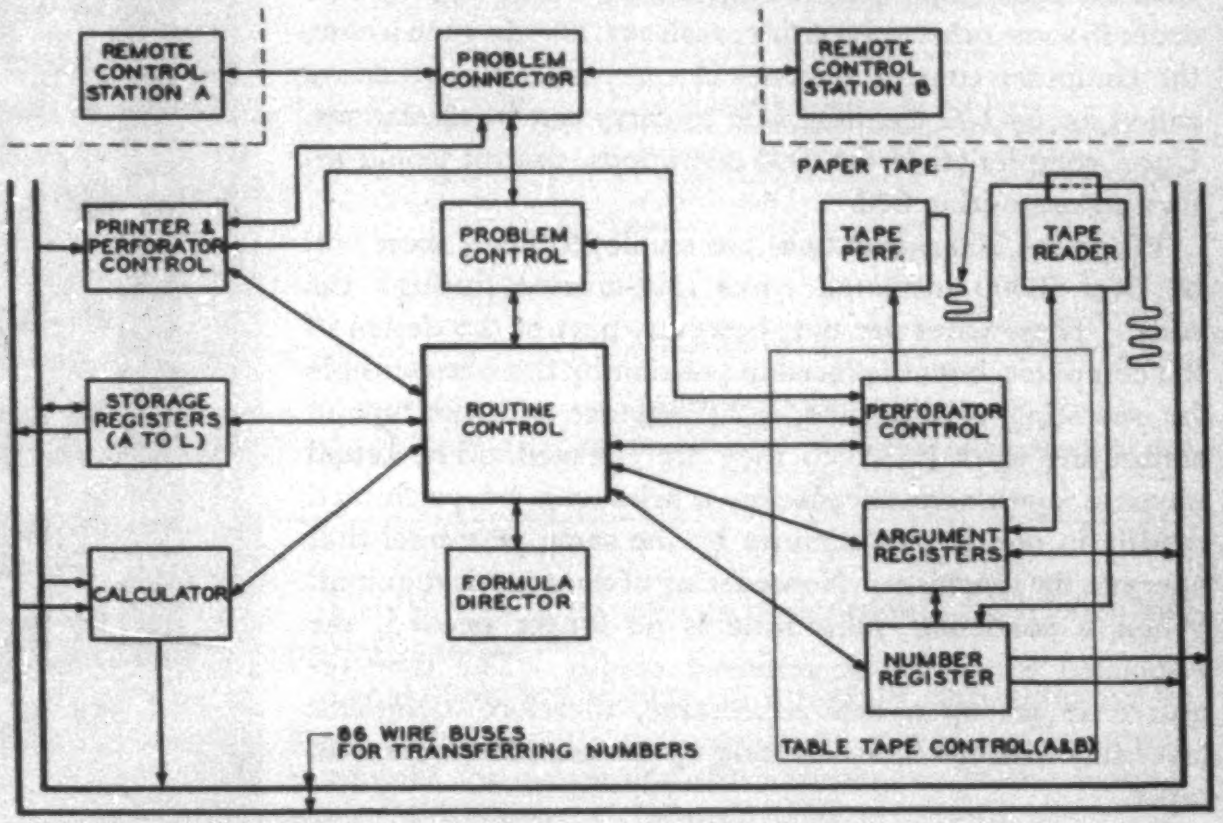

Figure 3. **Block diagram of Model VI computer components**

One of the new features is a "second trial" feature which is brought into operation automatically in almost all cases when the routine control circuit fails to receive the usual *OK* signal indicating satisfactory execution of the instruction, or operation, called for. Experience on previous computers showed that a sizable proportion of machine stoppages resulting from relay contact failures would clear themselves when the relay at fault operated again. It is expected, therefore, that this second-trial feature will make for longer periods of uninterrupted computer operation.

Another feature is the provision of two independently-controlled storage tapes. Special features are provided for simplifying the programming that normally would be required for handling problems involving simultaneous equations and certain kinds of vector and matrix multiplication problems.

Another new feature has been provided for the purpose of reducing programming time for those problems which involve numerous small and frequently used computing subcycles, as mentioned previously. These include finding the trigonometric function of an angle, obtaining the logarithm of a number, performing complex-number arithmetic problems, computations of the impedance and admittance for the various configurations of inductance, resistance, and capacitance, and so forth.

The practical and economical method of coping with this situation was to provide for built-in routines which could be called for in the programming at any time by some simple identification.

The device used for this purpose is a combination relay and electronic device which is used in the Automatic Message Accounting System in a modern telephone office. As used in telephone switching it consists of a large group of code points, each one corresponding to the location of the call-originating equipment of a subscriber. A signal on one of these code points denoting the origination of a call causes the circuit to ascertain and to record the subscriber's 4-digit directory number.

As used in the computer, the code points correspond to the computing operations in a subroutine. A signal on one of these code points causes the computer routine control circuit to set into operation the desired computer operation. A subroutine will use a train of from 6 to 20 of these code points in succession. Facilities are provided for 200 such subroutines, each being identified by the letter *A*, *B*, *C*, or *D* followed by a 2-digit number.

The operation will be explained by an example which assumes that computations have reached the stage where the product of two complex numbers is required. Table II shows the formula used and the coding of the individual computer operations. Figure 4 shows how the operations are made a part of the computer. It shows that there is an extremely close resemblance between the coding as it is written on paper and as it is memorized by the computer.

Table II. **Coding of Subroutine for Complex-Number Multiplication**

$$(A+jB)(C+jD)=(AC-BD)+j(AD+BC)$$

Instruction		
Number	Operation Code	Explanation of Code
1	$B\times D$ E	Multiply B by D and store in E storage register
2	$A\times C$ S	Multiply A by C and hold result in calculator
3	$S-E$ P	Subtract BD from AC to obtain real part of product and print result
4	$A\times D$ E	Multiply A by D and store in E register
5	$B\times C$ S	Multiply B by C and hold result in calculator
6	$S+E$ P	Add AD and BC to obtain imaginary part of product and print result

The operation numbers *1* to *6* correspond exactly with code points *1* to *6*. The letter designations correspond exactly with the coil designations. The letters which form a particular computing operation are associated together on the left by writing them together on one line, and on the right by running a single insulated cross-connection wire through coils having the same letter designations. This train of six operations would be identified by a subroutine number, such as *D36*, not shown in Figure 5. In practice these subroutine numbers are being called formula numbers. The *D36* subroutine would be called into the computing program with the order (operation code), *TD36*, which might be an order in some other subroutine, such as *C12*. In such a case, the computer control digresses in carrying out instructions called for by *C12* to allow *D36* to carry out its operations. Upon completion of the *D36* operations, control would return to subroutine *C12*.

When the 200 subroutines are employed fully, there will be over 2,000 insulated wires criss-crossed through the coils. These wires are not, however, part of the design of the computer, but are placed in position by those responsible for operating the machine, in accordance with the type of computing work in which they are engaged. The actual physical operations of placing a wire can be performed readily in one or two minutes by the same personnel that operates the machine. No soldering of the wires is required. When a particular subroutine is no longer needed, the associated wires can be removed readily. The time required to set up a new subroutine, therefore, compares favorably with the time of setting up the same instruction on tapes.

Figure 5 shows several of the coils with their associated cold-cathode tubes. Figure 6 diagrams the coil and tube-firing circuit.

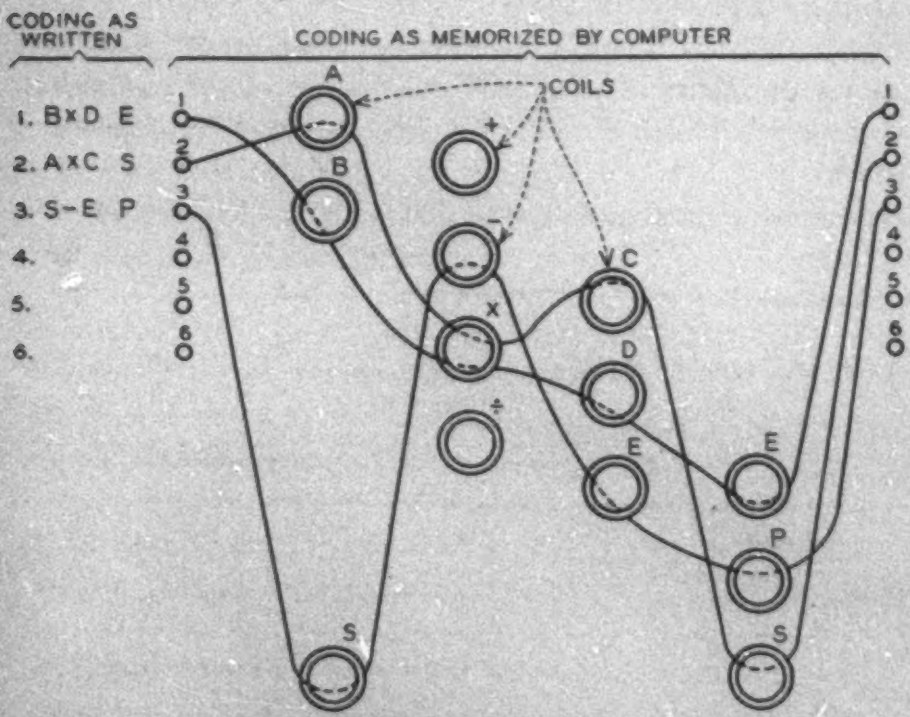

Figure 4. Wiring for subroutine for complex-number multiplication

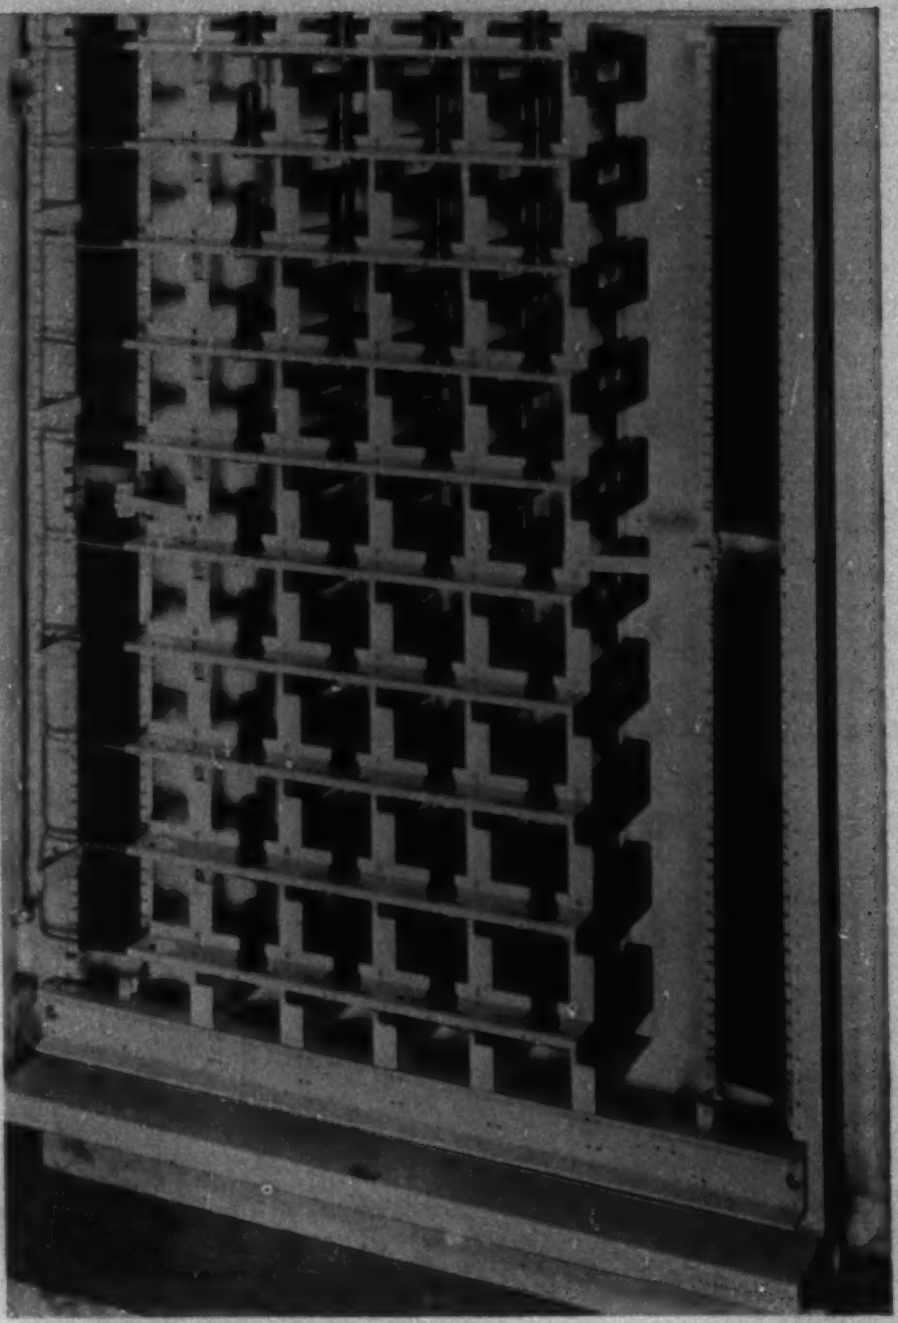

Figure 5. Mounting of coils with their associated cold-cathode tubes

A computer operation is initiated by causing a transient discharge from a resistance-capacitance-inductance network to be sent through the cross-connection wire. The system, consisting of the wire and the coil, behaves like a transformer with the wire acting as a loosely coupled 1-turn primary winding and the coil acting as the secondary. The transient through the primary induces enough voltage into the secondary to cause ionization between the control anode and the cathode of the type *313* cold-cathode tube. As soon as complete ionization takes place, a relay in the main anode circuit operates and disconnects itself from the tube, thereby allowing it to deionize. In this operation the tube is conducting for less than 0.01 second and is operating at conservative voltage limits. A very long tube life can be expected.

The principal advantage to be derived from these internal routines is one of simplification of the programming. It provides bigger building blocks with which to build the complete program for solving a problem. At the same time the arrangement provides for faster operation through the use of electronics, permanent memory of the instructions, and much lower cost then would be entailed by attempting to use punched tape controls.

These larger building blocks presented a kind of a challenge to make the most efficient use of them. Indiscriminate use would make for chaos. An efficiency expert would systematize the situation by grouping together the subroutines which could be made complete in themselves and by grouping others so that they would have supervision over the first group. This is regimentation, but in a machine it is both acceptable and desirable. In fact, this regimentation is closely analogous to that which might exist in the most strict military school, where an upper classman would look with disdain upon any task (or computing operation) which a lower classman could perform. Consequently, the upper classmen would be assigned to perform the more complicated tasks according to their own skill and would be given authority to delegate lower classmen to do their more menial chores.

To continue the analogy, the Model VI computer has four levels of computing skill for making use of the internal subroutines already noted. They can be programmed to call in subroutines of a lower level and to regain control when the subordinate routine completes its task. The term "intelligence level" accurately describes the nature of these levels. (It is believed this term was originated by Dr. George R. Stibitz.)[5]

Figure 7 shows how this system operates in solving a rather complicated problem. One of the objectives of this problem is to determine the frequency response of the network. Mathematical analysis, therefore, is used in lieu of laboratory tests.

The top level of the flow chart in Figure 7 is designated *PT*, denoting "Problem Tape." While this tape is used primarily for the introduction of the parameters of the problem, it may contain as much detail in computing instructions as required. In the case of the problem being described, less than one inch of tape is required for the computing instructions, because the Model VI computer is assumed to have been taught already how to solve the ladder-network problem. The problem tape then simply specifies that subroutine *A12* be used. The tape thereby constitutes another intelligence level, higher than the four previously discussed.

In the interest of eliminating unnecessary detail, all of the changes in level are not shown in Figure 7, but there is still sufficient detail to show the principle of operation. By this systematic arrangement of internal routines, the labor involved in preparing the necessary problem data is near the irreducible minimum. The complete information for the ladder-network problem would be perforated out on a problem tape in accordance with the sequence shown in Table III.

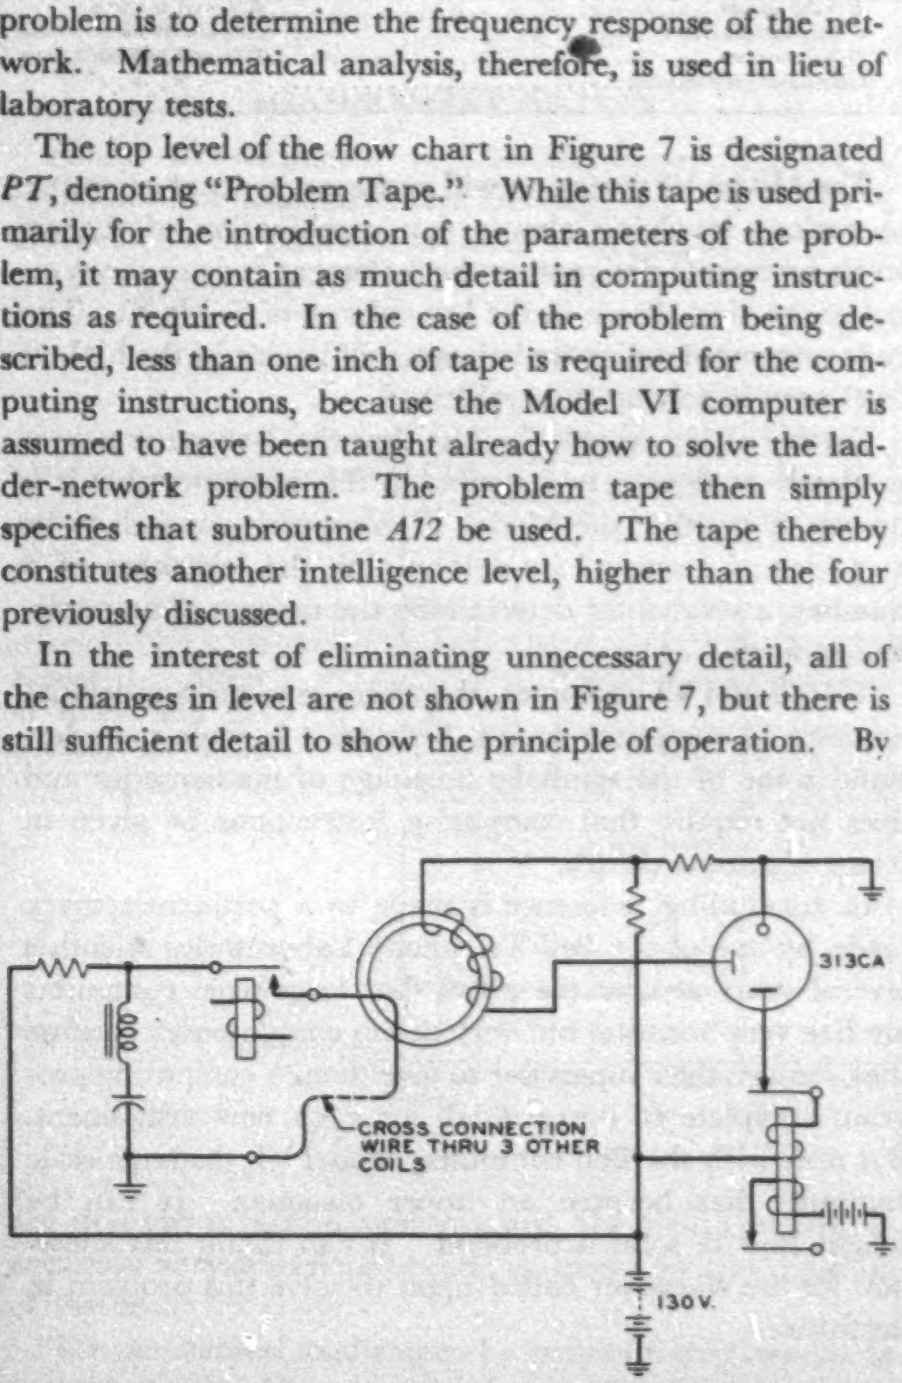

Figure 6. Schematic of coil and tube-firing circuit

Table III. Complete Data on Problem Tape for Network Problem of Figure 7

Item Number	Data on Problem Tape	Explanation of Data
1	Block 000	The designated location on the tape for the basic formula (or subroutine)
2	*A12*	Subroutine number for ladder network problem
3	Block 100	The designated location on the tape for f_1
4	f_1	
5	Block 101	The designated location on the tape for f_2
6	f_2	
7	Block 102	The designated location on the tape for f_3
8	*ENC*	A symbol (end of numbers check) denoting that no more frequencies are required for this problem
9	Block 200	The designated location on the tape for the parameters of the network
10	*C29*	Subroutine number for solving impedance Z_4
11	R_1 R_2 R_3 C_1 C_2 C_3 L_1 L_2 L_3	The values for the nine elements of impedance Z_4
12	*C37*	Subroutine number for solving impedance Z_3
13	R_1 C_1 C_2	The values for the three elements of impedance Z_3
14	*C41*	Subroutine number for solving for impedance Z_2
15	R_1 C_1 L_1	The values for the three elements of impedance Z_2
16	*C36*	Subroutine number for solving the impedance Z_1
17	R_1 C_1 L_1	The values for the three elements of impedance Z_1
18	*ENC*	A symbol (end of number check) denoting that there are no more parameters in this problem

The solution of the network is carried out in the following principal steps:

The *A12* routine assumes control at the start of the problem. It provides for organizing and setting up the initial conditions for computing the impedances for the various values of frequency *f*. It then delegates control to subroutine *B24*.

B24 controls the computation of the impedance of the various branches of the network. It also arranges to have the impedances recorded in block *400* on the storage tape for subsequent use by subroutine *B35*. After these preparations, *B24* will instruct the computer to use item 10 on the tape, that is, *C29*, as the subroutine number to use in computing the impedance of the first branch.

C29 provides for reading off the parameters, item 11, which follow and for combining the impedances for the individual elements, making use of *D*-level subroutine for the complex number arithmetic when required. The last instruction in *C29* is to instruct the computer to use the next number on the tape, item 12, as the next subroutine to use. Additional subroutines are employed as required. After computing the last impedance with values given in item 17, the computer is instructed to use the next number on the tape as a subroutine number. However, since item 18 is not a number but an *ENC* symbol denoting that there are no more parameters in this problem, control is restored to subroutine *B24*.

On regaining control, *B24* will instruct the computer to return to block *101*, item 5, on the tape to obtain the next value of frequency. *B24* then arranges to have the impedances for the next value of frequency recorded in block *401* and then, using this new frequency value, repeats all of the operations just described. After completing the computing with the last value of frequency, *B24* will instruct the computer to return to block *102*, item 7, for another value of frequency. However, since item 8 is not a number but an *ENC* symbol denoting that there are no more frequencies in this problem, control is restored to *A12*.

A12, on regaining control, will organize the computing of the complex values of voltage and current which the generator must supply. It then calls in *B35* to control these calculations.

B35 obtains access to block *400* which has all of the impedances for the first frequency value. It will call in *C*-level subroutines as required to carry out the computations and for printing the required data. *B35* will repeat for block *401*, *402*, and so forth, and will return control to *A12* after using the data in the last block in the *400* series.



Figure 7. Time flow chart (below) showing use of four intelligence levels to solve a ladder-network problem (above)

A12, on regaining control, will provide for obtaining any additional information that may be required.

The preceding explanation pertains to a case where it is assumed that the problem data consist of 32 items of information, as summarized in Table IV.

Table IV. Summary of Information for Network Problem of Figure 7

Number of Items	Nature of Items	Number of Characters Perforated on Tape: Symbols	Data	Total
2	Frequency values		22	22
18	Problem parameters		210	210
5	Formula numbers		40	40
5	Block numbers	35		35
3	Start and end symbols	3		3
33	Total	38	272	310
		12 per cent	88 per cent	100 per cent

The first 25 of the 33 items in Table IV are associated intimately with the problem being solved. The last eight items are repeated for each problem. Thus, as stated earlier, it is believed that the labor involved in preparing the necessary problem data is near the irreducible minimum. Furthermore, the problem as described with 33 items is near the minimum in size. Ladder-network problems with 200 or more items of data are visualized. Subroutine *A12* would handle them all, regardless of the number, size, or complexity.

From the foregoing more or less detailed explanations, it will be noted that the individual computing operations specified by a subroutine consist mostly of a collection of calculator and recording instructions. It then follows that the calculator instructions themselves comprise an intelligence level below all of the others. Instead of being identified and called for by a subroutine number, the usual symbols +, −, ×, ÷, and √ are employed. As in the other intelligence levels, the calculator returns control to the higher level which called it in as soon as the prescribed arithmetical operation is completed.

The Model VI computer, then, has at least six intelligence levels shown in descending order of authority or control in Table V.

Table V. List of Intelligence Levels

Name	Designation or Symbol
1. Problem tape instructions	*SWR* (switch to routine)
2. *A* Subroutines	*A12*, and so forth
3. *B* Subroutines	*B24*, and so forth
4. *C* Subroutines	*C29*, and so forth
5. *D* Subroutines	*D59*, and so forth
6. Calculator instructions	+, −, ×, ÷, √

The Model VI computer will perform a series of computer operations involving almost any combination of the six levels by merely designating the 3-element code or the symbol of the kind shown in the last column of Table V. The code or symbol designated always will be one in the highest level used in solving the problem.

Further study reveals the fact that the 3-element code is so closely analogous to a symbol in this computer that it is proper to say that the Model VI computer responds to its own idea of a symbol for determining the logarithm of a number, a symbol for determining the tangent of an angle, and so forth.

The Model VI computer, therefore, represents a definite advance in computer design, because it is made to understand some of the symbolic language of mathematics and does not require that computing instructions be given in terms of minute details.

In concluding, reference is made to a pertinent remark made by one of the Bell Telephone Laboratories scientists several years ago, to the effect that large-scale computers are like very accurate but very dumb computresses because they require their supervisor to give them a computing program complete in every detail for each new assignment. But now with the Bell computer, Model VI, the large-scale computer has become an upper classman. It can be taught how to solve a problem. It can retain this know-how for use whenever called upon to solve this problem in the future.

REFERENCES

1. The Relay Interpolator, **O. Cesareo.** *Bell Laboratories Record*, Bell Telephone Laboratories, Inc. (New York, N. Y.), December 1946, page 457.

2. The Ballistic Computer, **Joseph Juley.** *Bell Laboratories Record*, Bell Telephone Laboratories, Inc. (New York, N. Y.), January 1947, page 208.

3. A Relay Computer for General Application, **S. B. Williams.** *Bell Laboratories Record*, Bell Telephone Laboratories, Inc. (New York, N. Y.), February 1947, page 49.

4. A Bell Laboratories' Computing Machine, **Franz L. Alt.** *Mathematical Tables and Other Aids to Computations*, January 1948, page 1, and April 1948, page 69.

5. The Organization of Large-Scale Calculating Machinery, **George R. Stibitz.** *Annals*, Computation Laboratory, Harvard University, Cambridge, Mass., volume 16, page 91.

Armature Iron Losses in Series Motors

SHELDON S. L. CHANG
STUDENT MEMBER AIEE

J. H. KARR
MEMBER AIEE

IN AN A-C series motor, the flux pulsation in the field is predominantly at line frequency. The field iron loss can be computed easily and represented by a loss component in the magnetizing current. However, due to the rotation of the armature, the gap flux is rotating relative to the armature, as well as pulsating. The armature iron loss depends on both the line frequency and the speed. Part of the iron loss is supplied electrically by a loss component in the magnetizing current, while the remaining part is supplied mechanically as a load on the shaft. The accurate calculation of motor performance is dependent upon the correct determination and also the correct allocation of these losses.

MEASUREMENT OF LOSS

Actual measurements on one-third-horsepower motor show that the armature iron loss supplied electrically is independent of speed except near synchronous speed. If the iron loss is plotted against speed, the values drop quite suddenly at synchronous speed, as shown by the diagram of Figure 1.



Figure 1. Effect of speed and excitation on field input

The mechanical load caused by armature iron loss can be separated from friction and windage losses. It increases gradually for speeds below and above synchronous speed. At synchronous speed the armature iron loss supplied mechanically increases sharply as shown in Figure 2. The increase in mechanically supplied iron loss just about compensates the decrease in electrically supplied iron loss. The total armature iron loss shows a gradual increase without discontinuity.

The foregoing phenomena can be satisfactorily explained quantitatively by the double revolving field theory. The gap flux is decomposed into two rotating flux systems. The effects of these systems are assumed to be independent of each other.



Figure 2. Magnetic drag on armature

Test values are indicated

The result of this analysis is as illustrated in the following:

1. At speeds below synchronous, the armature hysteresis loss is independent of speed and is supplied by the field. Above synchronous speed, the armature hysteresis loss is proportional to the speed and is supplied mechanically as a shaft load. The switching from electrical loss to mechanical loss at synchronous speed causes the observed discontinuity.

2. The armature eddy current loss increases with speed. At any speed, the field supplies the constant 60-cycle eddy current loss, while the rest is supplied mechanically. Both test results and calculations show that the mechanical load caused by armature iron loss is a very considerable factor. It amounts to about 15 per cent of the full load torque for a one-third-horsepower motor. This percentage is higher for smaller motors.

PRINCIPLE OF SUPERPOSITION

In relation to the art of electrical engineering in general, the foregoing facts furnish another example of the principle of superposition. The assumption of two separate flux systems is not strictly correct as the hysteresis effect cannot be described by a system of linear equations. Consequently the experimental results disagree with the theory in that the theory predicts a sudden change at synchronous speed, while the actual change really takes place in a range of a few hundred revolutions per minute about synchronous speed.

Digest of paper 49-70, "Armature Iron Losses in Series Motors," recommended by the AIEE Rotating Machinery Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

Sheldon S. L. Chang and **J. H. Karr** are both with Robbins and Myers, Inc., Springfield, Ohio.

Lightning Investigation on a Rural System

D. D. MacCARTHY
MEMBER AIEE

D. A. STANN

D. R. EDGE
ASSOCIATE AIEE

W. C. McKINLEY

THE General Electric Company and the Central Electric Cooperative, Inc., at Parkers Landing, Pa., conducted an investigation on 7,200-volt multigrounded rural systems during the period from 1944 through 1947. All lightning measurements were made on one extensive feeder with approximately 465 miles of line and 1,350 distribution transformers protected by expulsion arresters.

Surge-current polarity and magnitude were measured with magnetic links having a measurable range of 100 to 30,000 amperes. Long-duration lightning surges were measured by automatic cathode-ray oscillographs having an initiation time of 20 to 50 microseconds. These instruments were designed to record times accurately within 0.5 millisecond. Sixty-cycle fault currents, arrester follow currents, load inrush, and magnetizing currents were measured by automatic magnetic oscillographs. Power currents in excess of a predetermined value through any one of the phase conductors or system neutral automatically initiated the magnetic oscillographs within one-half cycle.

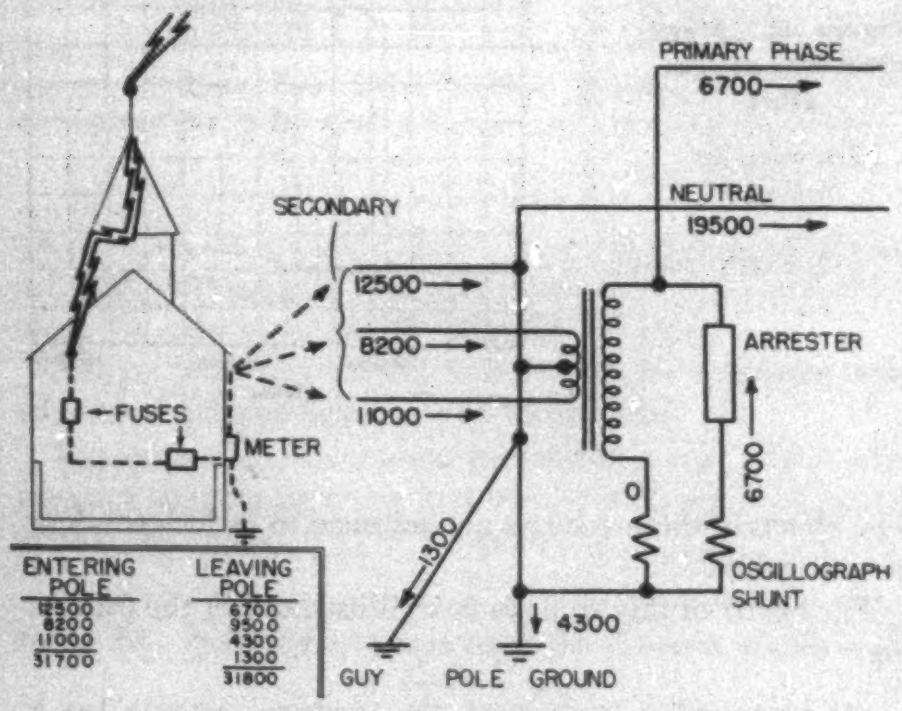

Figure 1. Path of stroke to church steeple and resulting surge currents at transformer pole

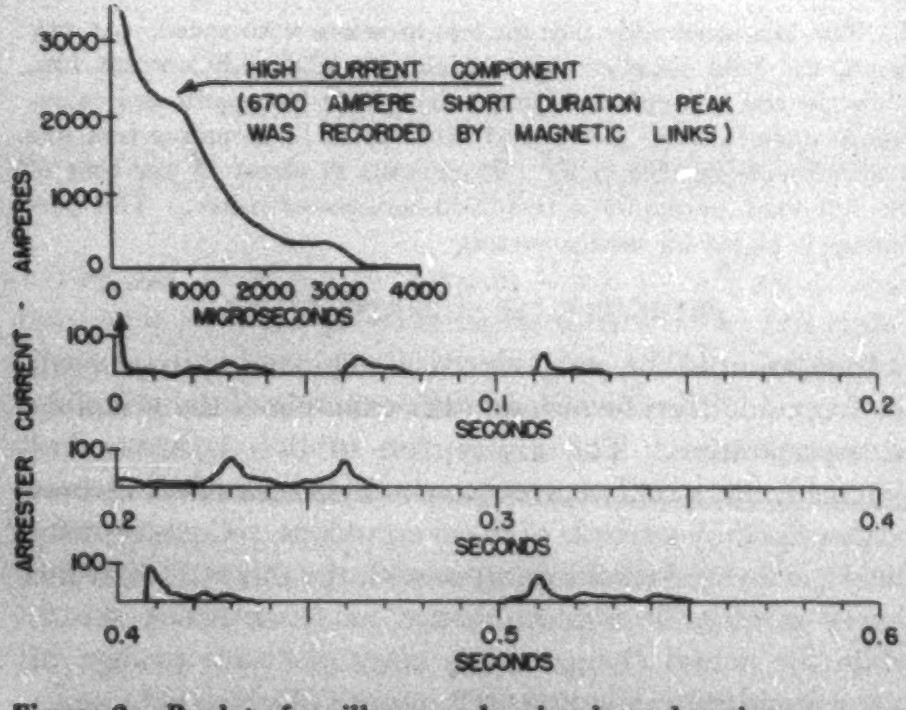

Figure 2. Replot of oscillogram showing long-duration arrester discharge resulting from stroke to church steeple

In a representative 8.5-mile section of line, a study was made in which magnetic links were installed on every conductor connected to each of the transformers (see Figure 1) and pole ground wires at adjacent poles. Cathode-ray oscillographs were installed at several of the transformers in this section. In 88 transformer-years, a total of 120 lightning surges reached the transformers, resulting in 86 arrester discharges. One-third of the surges arrived at the distribution transformers by the secondary or pole ground wires; about two-thirds reached the system phase and neutral conductors from the secondary and pole ground wires.

The most severe lightning surge of the 17 recorded by automatic cathode-ray oscillographs was obtained when lightning struck a church steeple and entered the system by way of the secondary conductors. The surge distribution is shown by the magnetic-link records, and the arrows show the direction of negative current flow, Figure 1. The automatic cathode-ray oscillograph at this location was connected to record both the primary transformer and arrester currents. No surge was recorded in the transformer primary. The oscillogram of the arrester discharge, Figure 2, shows a current peak of 3,500 amperes that decayed to virtual zero in 3,000 microseconds. This was followed by six separate long-duration discharges of 90 amperes or less that ceased after 0.55 second.

A representative group of expulsion arresters equipped with magnetic links was selected for inspection after each lightning storm to minimize superposition of records. Data from 293 arrester-years' experience at these locations indicate lightning surges often caused simultaneous discharges of arresters at adjacent locations. One severe surge discharged all 13 arresters on three miles of line. Arrester discharge rates vary greatly with the locality. Magnetic links show that 40 per cent of the arresters discharged once per year, 19 per cent twice per year, 6.5 per cent three times per year, and 2.7 per cent four or more times per year. The arresters average 1.1 discharges per year. On a yearly basis, 0.36 per cent of all arresters on this feeder discharged currents exceeding 30,000 amperes, 50 per cent at least 200 amperes, and 67 per cent at least 100 amperes.

Digest of paper **49-110**, "Lightning Investigation on a Rural Distribution System," recommended by the AIEE Protective Devices and Transmission and Distribution Committees, and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

D. D. MacCarthy and **D. A. Stann** are with the General Electric Company, Pittsfield, Mass.; **D. R. Edge** is with the Graybar Electric Company, Chicago, Ill.; **W. C. McKinley** is with the Central Electric Cooperative, Inc., Parkers Landing, Pa.

Is There a Doctor in the House?

Unsolved Motor Design Problems Suggested for Postgraduate Theses

T. C. LLOYD
MEMBER AIEE

P. H. TRICKEY
FELLOW AIEE

W. R. HOUGH
MEMBER AIEE

C. P. POTTER
FELLOW AIEE

ONE SOMETIMES HEARS the statement that the electric machinery field is so well established that relatively few opportunities exist for further investigations and developments. Nothing could be further from the truth. In the electric motor business alone, many problems appear which are not solved rigorously but are by-passed by estimates based on experienced judgment; or they are solved by empirical data in use in design offices, but not generally available in the literature. In either case, further study is justified.

Under pressure of business, many of these problems remain partially or completely unsolved. In the meantime, staff members in our engineering colleges may be seeking subjects for suitable masters' and doctors' theses. A list of such problems is given here. It is hoped that the possibility of the solutions to these problems proving useful will not count too heavily against them. These investigations may require anywhere from 100 hours to 100,000 hours.

The chief engineers of four motor manufacturers point out problems which are largely unsolved, or might justify further investigations. They are suggested as postgraduate theses for students interested in electric machines.

Before going into detail on such problems, the writers would like to point out an entire field which remains largely unexplored. Many of the data available on machinery involve *analysis*. That is, a machine is presumed to be fixed and the problem is: To determine the parameters by either test or design data, and to use the parameters to obtain the performance by graphical or calculated means. To repeat, this is analysis.

Distinct from such problems are those of *synthesis*. In such cases, the desired performance is known, and the problem is to determine certain attributes of either the electric or magnetic circuit required to yield the performance. Direct methods of electrical design involve true synthesis.

With comparatively few exceptions[1-4] this whole field is largely unexplored. Although synthesis is most useful in a design office, it is not at all necessary for one to be an electrical designer to make contributions to this field. Developments of this sort involve expansions and transformations of existing analyses, while not always requiring design judgment.

Opportunities and problems in motor synthesis are too many to be listed in detail. Some of them are pointed out in the following, along with the suggested analyses.

POLYPHASE MOTORS

Two-Speed Winding Constants. Many 2-speed polyphase induction motors are built in which the second speed is obtained through reconnection of the same stator coils for twice the number of poles. This is the so-called consequent pole winding. What are the correct values of leakage[*] and magnetizing reactances for both connections? How do the no-load currents and core losses vary with reconnection? There is some evidence that standard methods of calculation, adjusted for these conditions, are not rigorous enough to be completely trustworthy. Various methods are in common use for determining the equivalent heating effect of periodic loads. Why not obtain experimental verification of the temperature rise on polyphase motors when operating on special duty cycles, including frequent starting, stopping, plugging, and reversing?[6-12]

Material can be found in textbooks concerning the use of polyphase induction motors as asynchronous generators. Yet when one occasionally uses such a machine as a calibrated load in laboratory tests, there are some doubts as to the nature of the losses and the supply for the core loss. Is the surface loss supplied by the same source as the rest of the iron loss? Investigation of the wound-rotor induction motor as an asynchronous generator, and as a frequency changer, should prove useful also; the separation of core losses and the supply for the components of core losses seems to be in some doubt for the latter machine.

The predetermination of temperature rise in motors is a difficult or almost impossible task. However, the correlation between hot-spot temperature rise, rise by thermocouple, and rise by resistance as determined experimentally is still a problem which could stand further investigation. This could cover nonventilated and single-end and double-end ventilated machines.[13-18]

Breakdown torque, locked kilovolt-amperes per horsepower, and the slip of polyphase motors are all interrelated through the same group of parameters. Curve sheets show-

---

T. C. Lloyd is Chief Engineer, Robbins and Myers, Inc., Springfield, Ohio; P. H. Trickey is Chief Engineer, Diehl Manufacturing Company, Finderne, N. J.; W. R. Hough is Chief Engineer, Engineering Department, Reliance Electric and Engineering Company, Cleveland, Ohio; and C. P. Potter is Chief Engineer, Electrical Division, Wagner Electric Corporation, St. Louis, Mo.

[*] See series of papers on leakage reactance presented at AIEE Middle Eastern District Meeting, Dayton, Ohio, September 23–25, 1947, and listed on meeting program, (*EIE, Sept '47, page 929*).

ing the relationship are comparatively simple if the approximate circuit is used. But what are the more exact relationships and what about the effect of saturation on the locked kilovolt-amperes? A series of charts for such analyses might be useful.

Can any quick method be developed for determining the effect of unbalanced voltages on the performance of polyphase induction motors?

SINGLE-PHASE MOTORS

Leakage Reactance. (*a*). Assume a stator winding is built in a field with exceptionally wide teeth. The leakage reactance can be calculated in the usual manner.* (*b*). Assume now that an equal member of stator slots is provided between each existing slot in (*a*). These contain no winding. Will the leakage reactance be different in (*a*) and (*b*)?

(*c*). Presume now that a start winding (say for split phase) is added only in the intermediate slots of (*b*). When this winding is excited during the starting period will it modify the reactance of the initial main winding? Through affecting the zigzag flux? If so, it implies that the main winding leakage reactance is different when the start winding is active, from that used for running performance. What are the two values under these circumstances?

Concentrated Windings. Methods of calculating the leakage and magnetizing reactances of distributed-type concentric windings are available.[19] However, if the main and start windings each reduce to one concentrated coil per pole, the calculations do not seem to be rigorously accurate. What is a good system for calculating these reactances under such conditions? Are the discrepancies in performance due to the "block"-shaped air-gap flux, and resulting harmonic reactions?

Suppose now instead of a separate coil for each pole on the main winding, one coil is looped half way around each pole, forming a skein winding. That is, one continuous coil supplies all of the main and a similarly shaped coil supplies all of the start winding. How are the winding parameters calculated? How can one predict the reduced torques and horsepower ratings resulting from these windings as compared to normally distributed types?

Comparisons. The following comparisons are for single and polyphase motors.

1. A single-phase motor is built in exactly the same stator and rotor laminations and with the same stack and rotor cage as a polyphase motor. Suppose each is designed with the same flux per pole. What are the relative values of maximum torque obtained from each? (Some assumptions must be made concerning relative conductor length and winding factors.) On the basis of these maximum torques, what relative horsepower ratings should be assigned to each?

Because of the increased magnetizing currents of single-phase motors, the circular mils per ampere of the two will differ. On the basis of equal copper loading in both, what full-load horsepower ratings should be assigned to each?

2. Suppose the foregoing single-phase motors were built as capacitor-start induction-run types. Does good design result from the use of the same rotor resistances in both cases? If not, what should be the relative resistances of squirrel cages for single and polyphase motors built in the same laminations and stacks?

3. It seems to be accepted as more or less axiomatic that double-layer lap windings are best for polyphase and concentric type are best for single-phase motors. For single-phase motors what are the relative merits of concentric and lap windings? This could be investigated on the bases of relative winding parameters, copper weights, and resulting performance.

SPECIAL TYPES OF SINGLE-PHASE MOTORS

Capacitor Start. The application of electrolytic capacitors to motor starting duty involves the voltage drop across the capacitor. Starting performance of such motors is subject to analysis and synthesis.[20] The torques and currents during the acceleration of such a motor normally are not calculated because of the tedious operations involved. But at some value of speed, (say two-thirds of synchronous) just before the centrifugal switch opens, is the voltage across the capacitor higher or lower than at starting? Can any rule governing the combinations or ratios of all the winding parameters be worked out so that by a simple check it is possible to determine the relative value of the voltage drop across the capacitor at two-thirds of synchronous speed? (Excessive voltage drop at these speeds may reduce capacitor life.)

Is it possible to calculate a combination of "critical" motor winding parameters, below which the accelerating *torque* of such a motor at two-thirds speed is less than the starting value? Or conversely, if the combination of parameters is above the "critical," is the accelerating torque always sure to be higher than the stalled torque?

Accelerating Torque—Split-Phase Motors. The torque of a resistance split-phase motor at any speed can be calculated, but the method is tedious. Is it possible to set up simple equations or curves involving all of the winding parameters which show whether the torque at two-thirds synchronous speed is higher or lower than the starting torque?

Repulsion Induction Motors. Calculations for the performance of single-phase repulsion induction motors take into account the brush shift. Why not an experimental verification of the performance with various shifts? What about the effect of brush and commutator bar width on the apparent shift?[21]

The Shaded-Pole Motor. This is in a class by itself. While millions of them are produced each year in hundreds of different designs, its habits are less understood than those of the dodo bird.

Pioneering work on analyses has been done by one[22,23] of our writers, but much remains to be done. The machine parameters are not subject to rigorous calculation in an entirely satisfactory manner. Losses cannot be calculated with assurance. Designs are made by extensive experimental work, varying pole shapes, degrees of shading, sizes of shading coils, air-gap lengths, and rotor resistances. Weights, shapes, and locations of magnetic wedges introduce additional diabolical factors. Direct design syntheses are totally lacking.

---

* See footnote, page 759.

So many combinations of factors are possible with all of the variables to adjust, that investigations are very complicated. Are there various new equivalent circuits possible for the shaded-pole motor, and if so, should they be doubly fed? Can any analyses hope to be accurate without considering several harmonics in the air gap flux?

The entire field is wide open for research.

LOW-VOLTAGE SUPPLY TAP

Many motors, both fractional-horsepower and integral-horsepower, are made with a winding which gives a low output voltage for a small amount of electric power to operate a relay switch or lamp. This is sometimes simply a pair of taps from the main motor winding and sometimes a separate winding.

At first thought it appears to be a simple transformer or autotransformer problem to determine the output voltage and regulation. However, the actual cases are far from simple. The voltage and regulation are affected by the size of the motor compared to the tap load; whether the motor is split-phase, polyphase, capacitor, or repulsion; the voltage of the motor; and many other conditions such as exact location of taps, size of air gap, eccentricity of air gap, and many unknown factors.

The designer would like to be able to predict accurately the open circuit and load voltages and would like to know all the factors affecting them.

UNEXCITED SYNCHRONOUS MOTOR

Reluctance Types—Torques. The reluctance-type synchronous motor was analyzed in part by Ball[24] using a method based on energy stored in a magnetic field. Results cannot be verified consistently by test. The 2-reaction theory with excitation reduced to zero[25] represents an analysis with considerable promise.

Methods of predicting pull-out torque and running performance of reluctance-type synchronous motors would be very useful and could stand further investigations. In addition, the whole question of *synthesis* on such motors remains totally unexplored. Given a fixed magnetic circuit, how many stator conductors are needed to produce a desired pull-out torque? This would be the approach for synthesis. Suppose the field is excited by polyphase, by plain single-phase action, or by permanent split capacitor windings? Synthesis for the first case is not too difficult. The other cases are probably very complicated.

For loads of high inertia, the size of a reluctance-type synchronous motor frequently is fixed by the pull-in rather than the running torque. How can the synchronizing or pull-in torque of all of the foregoing types of synchronous motors be calculated for a given load inertia? For the conventional, excited case, the differential equations governing these conditions have been set up on the differential analyzer. Perhaps a similar investigation could be made with the unexcited motors.

Hysteresis Type—Synchronous Motors. With few exceptions[26, 27] little can be found in the literature on these motors. They are being produced. Analyses pertaining to every item of performance would be useful. The metallurgy of the rotor material is vitally important.

Direct design methods are totally lacking. A few empirical rules and extensive experimental work are the present means for making new designs and ratings.

D-C MOTORS

Contrary to the general understanding of many, d-c motors are not declining in importance or usefulness. The usefulness of the d-c motor as a means of securing adjustable speed and the value of adjustable speed to industry account largely for the continued popularity of d-c motors.

In this connection, d-c motors are being used with grid-controlled rectifiers supplying unidirectional current from a-c circuits. Depending upon the number of phases used in the rectifier conversion, the instantaneous voltage applied to the motor terminals varies over wide extremes. The resulting motor performance and characteristics are substantially different than when supplied from true d-c sources. Iron losses, copper losses, and stray losses may differ radically from those present under the equivalent condition with a d-c source.

Analysis of the flux conditions and the current loading of conductors of a d-c motor operating from single- and multiple-phase rectifier sources is deserving of attention.

UNIVERSAL OR SERIES MOTORS

Millions of universal motors (or motor parts) are built for the domestic, commercial, and portable tool fields. Is there no way in which rigorous analyses of their operation can be made so that tests and calculations agree? Or, if this step can be accomplished, how about a direct design method whereby required performance can be met? Or, as just a part of the problem, how can one calculate the magnetization curve for such a motor which actually will agree with the apparent magnetization curve shown by performance? How does the effect of commutation interfere with performance, and how can it be calculated? The literature on these subjects is very inadequate.

REFERENCES

1. **Some Aspects of Electric-Motor Design—Polyphase Induction Motor Design to Meet Fixed Specifications, T. C. Lloyd.** AIEE *Transactions*, volume 63, 1944, January section, pages 14–20.

2. **Single-Phase Induction-Motor Performance, A. F. Puchstein, T. C. Lloyd.** *Electrical Engineering*, October 1937, pages 1277–84.

3. **Design of Starting Windings for Split-Phase Motors, T. C. Lloyd, J. H. Karr.** AIEE *Transactions*, volume 63, 1944, January section, pages 9–13.

4. **A Design Method for Capacitor Motors, T. C. Lloyd, S. S. L. Chang.** AIEE *Transactions*, volume 66, 1947, pages 652–8.

5. **Selecting Special Motors, R. J. Owen, J. J. Kirkish.** *Machine Design* (Cleveland, Ohio), June 1941.

6. **Selecting Motors for Specialized Requirements, R. J. Owen.** *Machine Design* (Cleveland, Ohio), March 1933.

7. **Induction Motors for Frequent Starting and Rapid Reversal, T. C. Lloyd, W. A. Thomas.** *Product Engineering* (New York, N. Y.), January 1937.

8. **Load and Thermal Capacity.** *Product Engineering* (New York, N. Y.), March 1948.

9. **Selection of Electric Motors Based on Load and Duty Cycle, Frank Lock.** *Product Engineering* (New York, N. Y.), August 1945.

10. **Individual Motor Drives for Runout Tables and Roller Coils, W. B. Snyder, L. E. Hildebrand.** *Iron and Steel Engineer* (Pittsburgh, Pa.), December 1935.

11. **Duty Cycles and Motor Rating, L. E. Hildebrand.** AIEE *Transactions*, volume 58, 1939, September section, pages 478–83.

12. **A Study of Short-Time Ratings and Their Application to Intermittent Duty Cycles, R. E. Hellmund, P. H. McAuley.** AIEE *Transactions*, volume 59, 1940, pages 1050–5.

13. **Investigation of Hot-Spot Temperatures in Fractional-Horsepower Motors, L. H. Hirsch, R. F. Munier, M. L. Schmidt, L. W. Wightman, J. S. Himebrook, T. C. Lloyd,**

O. G. Coffman, C. P. Potter. AIEE *Transactions*, volume 64, 1945, March section, pages 128–36.

14. Investigation of Hot-Spot Temperatures in Integral-Horsepower Motors, **L. E. Hildebrand, B. M. Cain, F. D. Phillips, W. R. Hough, J. G. Rosswog, C. P. Potter.** AIEE *Transactions*, volume 64, 1945, March section, pages 124–8.

15. Determination of Temperature Rise of Induction Motors, **E. R. Summers.** AIEE *Transactions*, volume 58, 1939, September section, pages 459–67.

16. Measurement of Temperature in General-Purpose Squirrel-Cage Induction Motors, **C. P. Potter.** AIEE *Transactions*, volume 58, 1939, September section, pages 468–73.

17. Some Problems in the Standardization of Temperature Ratings of Fractional-Horsepower Motors, **Cyril G. Veinott.** AIEE *Transactions*, volume 59, 1940, pages 1055–61.

18. Temperature Limits and Measurements for Rating of D-C Machines, **F. A. Compton, Jr.** AIEE *Transactions*, volume 62, 1943, December section, pages 780–5.

19. Design of Electrical Apparatus (book), **J. H. Kuhlmann.** John Wiley and Sons, Inc., New York, N. Y.

20. A Design Method for Capacitor Start Motors, **Sheldon S. L. Chang.** AIEE *Transactions*, volume 66, 1947, pages 1369–74.

21. Performance Calculations on Repulsion Motors, **P. H. Trickey.** AIEE *Transactions*, volume 60, 1941, February section, pages 67–73.

22. An Analysis of the Shaded Pole Motor, **P. H. Trickey.** *Electrical Engineering*, September 1936, pages 1007–14.

23. Performance Calculations on Shaded Pole Motors, **P. H. Trickey.** AIEE *Transactions*, volume 66, 1947, pages 1431–8.

24. Synchronizing Torque of an Unexcited Salient Pole Motor (Letter to the Editor), **R. D. Ball.** *Electrical Engineering*, February 1933, pages 136–7.

25. Performance Calculations on Polyphase Reluctance Motors (Synchronous Motors Without Field Excitation), **P. H. Trickey.** AIEE *Transactions*, volume 65, 1946, April section, pages 191–3.

26. Theory of Hysteresis-Motor Torque, **B. R. Teare, Jr.** AIEE *Transactions*, volume 59, 1940, pages 907–12.

27. The Hysteresis Motor—Advances Which Permit Economical Fractional Horsepower Ratings, **Herbert C. Roters.** AIEE *Transactions*, volume 66, 1947, pages 1419–30.

Electrical Essays

Magnetic Control of Mutual Induction

Electrical engineers at the company where I work tell me that one coil acts inductively on another if some of the magnetic lines which link the first coil also link the second coil, and they tell me that if there are no magnetic lines which link both coils, then there cannot be any mutual induction between the coils.

In Figure 1 then, a coil, *A*, carrying current and producing magnetic lines will act inductively on a coil in position *B*, but not on a coil in position *C*.

Now I have found a way of sweeping away these magnetic lines coming from *A* so that they will not even come near coils *B* or *C*, and therefore certainly cannot link them.

I got this idea standing in front of a fan on a hot day last week. In the room, I could feel the air from the fan more than ten feet away. However, I know that if I took the fan outside, and stood in a high wind, I would have to get up real close before any of the air from the fan would reach me.



Figure 1 (left). Magnetic lines of coil A



Figure 2 (right). Deflection of magnetic lines linking a coil

Now we do the same for a coil, and the magnetic lines which it puts out, only of course I do not use wind to blow the magnetic lines away.

What I do is use a good strong magnetic field coming from some other coil or magnet to push away the magnetic lines linking *A* so that they will not link *B*.

In my figures I make this strong magnetic field come in vertically downwards in the plane of the paper. If we look back at Figure 1 we see that we can find points such as *X* near the upper side of coil *A* where the lines from *A* point straight upwards. At these various points *X*, the field strength itself is strong near the coil side, and is weak for *X* far from the coil side.

If now I bring in my constant vertical field *H*, acting downwards, it will reverse the field at the points *X* which are farther away from *A*, but it will not be strong enough to reverse the field at points *X* near to *A*. There will be one *X* point therefore where the field strength will be reduced exactly to zero, and at that point there will be a singularity, where the magnetic line crosses itself. I show that in Figure 2.

Similarly, as I show in Figure 2, there will be a point *Y* near the lower side of coil *A* where the magnetic line crosses itself.

Now all the other magnetic lines which link *A* will lie between the two lines *X*, and *Y*. I show a few of these lines drawn light in Figure 2. Thus, there are no lines linking A which also link B. All such lines shown in Figure 1 are as it were blown down by the impressed constant field H so as to miss B completely. Thus mutual electromagnetic induction between A and B is completely stopped.

I have two questions for my readers:

1. Is my invention of how to stop mutual induction

between coils any good? 2. If so, what is this invention good for?

J. Slepian, Alter Ego

J. SLEPIAN (F '27)
(Associate Director, Westinghouse Research Laboratories, East Pittsburgh, Pa.)

Two Boxes

In the land of pure electrical constants an engineer is investigating two boxes, each having four terminals. Two of the terminals on each box are marked "input," and the other two "output." The engineer connects the input terminals to a source of alternating current (pure sine wave) and notes that the performance of the two boxes at the output terminals is the same for similar external loading. He also notes that the efficiency of both boxes is 100 per cent for all power loadings. However, the input currents of the two boxes differ remarkably. He tabulates his readings in Table I. The voltages and currents are expressed in unit values so that the reader may select his own base in studying the performance of the two boxes. What is in the boxes?

Table I

Input Volts	Input Current Box Number 1	Input Current Box Number 2	Watts	Output Volts	Output Current
Unity power factor load:					
1.000	0.000	1.000	0.000	1.000	0.000
1.000	0.259	0.966	0.250	0.966	0.259
1.000	0.500	0.866	0.433	0.866	0.500
1.000	0.707	0.707	0.500	0.707	0.707
1.000	0.866	0.500	0.433	0.500	0.866
1.000	0.966	0.259	0.250	0.259	0.966
1.000	1.000	0.000	0.000	0.000	1.000
Zero power factor load:					
1.000	0.000	1.000	0.000	1.000	0.000
1.000	0.250	0.750	0.000	0.750	0.250
1.000	0.500	0.500	0.000	0.500	0.500
1.000	0.750	0.250	0.000	0.250	0.750
1.000	1.000	0.000	0.000	0.000	1.000

A. A. KRONEBERG (F '48)
(Southern California Edison Company, Los Angeles, Calif.)

Answers to Previous Essays

Electromagnetic Induction Intensifier. The following is the author's answer to a previously published essay of the foregoing title (*EE, Aug '49, pp 677–8*).

My Alter Ego, the inventor, has quite surpassed himself this time, but he is only carrying on with logical completeness ideas concerning magnetic lines which are held and adhered to by many engineers.

To begin with, the spiraling lines of magnetic force are no new discovery of the inventor, but occur all the time. It is only in the exceptional case, as for the perfectly flat plane coil that the magnetic lines close. Twist this flat coil ever so slightly out of the plane, and the magnetic lines will spiral around endlessly, never closing. The answer (*EE, Feb '48, p 187*) to the electrical essay, "Magnetic Field of a Solenoid," (*EE, Jan '48, p 58*) indicated that for a long solenoid, too, the magnetic lines also spiral endlessly.

For Faraday, who introduced them, the electric and magnetic lines of force were very real things. For Faraday a magnetic line probably had substantiality and individuality equal to that of a stretched string. Maxwell in his famous Treatise, attempted, and quite successfully, to put Faraday's ideas into mathematical form. However, and this is one of the great values of a mathematical treatment, when Faraday's (and Maxwell's) ideas were reduced to mathematical equations, the properties and connotations of lines of force which were irrelevant to electromagnetic phenomena disappeared, and only that which was essential remained. Gone were the threads, the electric and magnetic lines, which joined remote points in space, or formed nicely stretched out loops, and which might be considered as moving about "cutting" wires. What was left was only the vital essence, the vector field: at each point of space, a direction, and a magnitude.

Maxwell's equations deal only with vectors, and these vectors are wholly and completely the electromagnetic field according to Maxwell. You may if you like introduce lines of force to help visualize the vector field, but properties of lines of force specific to curves in space and not significant for vector fields, also will be irrelevant and nonsignificant for electromagnetic theory.

The only significant properties of the lines of force for electromagnetic theory will be their direction and their density, in a sufficiently local region, since these properties are the only ones which correspond to the properties of the vector field. The continuity and individuality of the lines will be irrelevant properties. We may break them off in any small region, as we please, and start off new lines with similar direction and density, and these broken lines will represent the essential properties of the vector field just as well as the continuous lines.

Whether any particular line closes or not, and whether it links one or more particular metallic circuits will be irrelevant, since these two properties of lines depend on the lines having continuity and individuality, which we have just observed to be irrelevant. The present essay illustrates the irrelevance of the first property, and my next essay will illustrate the irrelevance of the second property.

That particular one of Maxwell's equations which expresses Faraday's law of electromagnetic induction is

$$\text{Curl } \boldsymbol{E} = -\frac{c}{4\pi}\frac{\partial \boldsymbol{B}}{\partial t} \tag{1}$$

It has in it only ***E*** and ***B***, both vectors. There is nothing about lines of force in it. The integral equivalent of equation 1 is

$$\int \boldsymbol{E}_s ds = \frac{\partial}{\partial t}\int\int \boldsymbol{B}_n dS \tag{2}$$

The left-hand member, ***E***, integrated around any closed path which may be a metallic circuit in particular is called the induced electromotive force or the induced voltage;

E, in this essay. The integral on the right is to be carried out over a 2-sided surface bounded by the closed path or circuit. How such a 2-sided surface looks for a multiturn coil was discussed in the preceding electrical essay, "Faraday's Law of Induction II" (*EE, Jul '49, p 613*). This integral is frequently and quite properly called the flux-linkage of the bounding circuit. It is independent of the choice of 2-sided surface bounded by the circuit. Flux-linkage defined by this integral is a definition in terms of the circuit, which determines the choice of surface over which to integrate, and of the vector-field flux-density. It has no irrelevant elements.

The 2-sided surface bounded by the smooth closed curve, over which the surface integral is taken in equation 2 is of some complexity when the bounding curve follows the wire in a multiturn coil. This was the subject of the preceding electrical essay. In this case, for the usual compact coil, we make little error if we substitute for the single 2-sided *n*-sheeted surface with *n*-1 branch-points, a set of *n* independent 2-sided single-sheeted surfaces, each such sheet being almost bounded by a not quite closed turn of the coil.

Similarly, the magnetic lines for a usual multiturn coil form a configuration of some complexity, each line spiraling around endlessly. Here again, we may make a small deviation from the actual field portrayed, if we force each line to close when it next comes back near itself. The lines of force then become simple closed curves whose density and direction approximately correspond to the magnitude and direction at each point of the actual vector field being portrayed.

It is when such approximations as have been just described in the preceding two paragraphs are valid, and it is when such approximations are used, that the method of calculating flux-linkage used by my Alter Ego and his friends, the engineers, is equivalent to the flux-linkage defined by the surface integral in equation 2. Certainly such approximations are valid for the individual usual compact coils which are used in electric machines. However, many of the magnetic lines would not even approximately close for a configuration of coils like that in Figure 4.

J. SLEPIAN (F '27)
(Associate Director, Westinghouse Research Laboratories, East Pittsburgh, Pa.)

Low-Voltage Winding. The following is the author's answer to a previously published essay of the preceding title (*EE, Aug '49, p 678*).

The main transformer winding will have two components of current in each half. For its excitation it will draw one ampere fundamental and 0.4 ampere third harmonic. This will be one component in each half of the winding. For the teaser transformer 86.6 per cent of rated voltage is applied to 86.6 per cent of the winding, hence its core operates at normal flux density. The exciting magnetomotive force must be equal to that required when the full winding was excited. As a result in the *T* connection the teaser transformer draws $1 \div 0.866 = 1.15$ ampere fundamental and $0.4 \div 0.866 = 0.46$ ampere third harmonic. This represents the total current in the teaser transformer. It has an rms value of $\sqrt{(1.15)^2+(0.46)^2}=1.24$ ampere.

The teaser transformer exciting current divides equally between the two halves of the main transformer, hence it introduces a fundamental component of $1.15 \div 2 = 0.577$ ampere and a third harmonic component of $0.46 \div 2 = 0.23$ ampere in each half. In one half, the fundamental component adds at 90 degrees to the other fundamental component there. In the other half the components subtract at 90 degrees. In either half the magnitude of the resultant fundamental component is $\sqrt{1^2+(0.577)^2}=1.15$ ampere. In one half of the main transformer winding the third harmonic component from the teaser transformer adds at 3×90 degrees = 270 degrees, to the other third harmonic component there. In the other half the components subtract at 270 degrees. In either half the magnitude of the resultant third harmonic component is $\sqrt{(0.4)^2+(0.23)^2}=0.46$ ampere. Since both halves of the winding carry equal components their rms currents are each $\sqrt{(1.15)^2+(0.46)^2}=1.24$ ampere. Thus we find that the three line currents have equal rms values. However, their wave forms are dissimilar because the harmonic components in each case are not in identical positions with respect to the fundamental components.

An unusual thing about this circuit is that it is a 3-phase circuit having equal third harmonic currents in the lines. This is possible because the currents are 120 degrees apart on the harmonic time scale and add to zero. The currents are only 120 degrees $\div 3 = 40$ degrees apart on the fundamental time scale, and not 120 degrees apart as they would have to be to make the line current wave forms identical.

GEORGE V. MUELLER (M '35)
(Professor of Electrical Engineering, Purdue University, Lafayette, Ind.)

Cathodic Vacuum Etching

A Ford Motor Company (Dearborn, Mich.) physicist, using a process called cathodic vacuum etching, prepares a metal sample for microscopic examination. Ions of low-pressure argon gas, which have been charged by 12,000 volts of electricity, bombard the metal, etching out extremely minute details of the surface structure

Cable Impregnated With High-Viscosity Oil

JOSEPH STICHER
MEMBER AIEE

G. H. DOAN
MEMBER AIEE

R. W. ATKINSON
FELLOW AIEE

LOUIS MEYERHOFF
MEMBER AIEE

DURING 1941, a 7-mile circuit of 120-kv high-pressure gas-filled pipe-type cable known as the *SMD*-type cable was installed by The Detroit Edison Company, and has been in satisfactory operation since it was energized on December 31, 1941. An impregnating compound of much higher viscosity than that normally used in the mass-impregnation of cables was employed, and, at the time, preimpregnation of the tapes seemed to be the only method of assuring satisfactory impregnation throughout the wall of insulation.

A 12.3-mile circuit of *SMD*-type cable has been installed since at Detroit and was energized on December 13, 1948. At the time the design for this new line was being studied, mass-impregnation of the insulation was investigated and, as a result, half of the cable on this line has been made with mass-impregnation.

In conjunction with the question of mass-impregnation versus preimpregnation, it was necessary to consider two chief problems. One was whether satisfactory impregnation could be achieved by the mass-impregnation process when a thick wall of insulation was to be impregnated with an oil of 3,000 Saybolt Universal seconds (6 poises) at 100 degrees centigrade. The other was whether, in a mass-impregnated cable, proper gas pressure could be assured at all locations in the insulation to prevent ionization at operating voltage if, for instance, rapid cooling of the cable should occur with consequent rapid increase of the viscosity of the impregnant.

The impregnating oil which was used is known in the industry as *HC 3000*. Its constituents have a fairly narrow range of molecular weights, and the oil is much more nearly homogeneous with respect to molecular type than are natural petroleum oil impregnants. The oil is produced by polymerization of refined low-molecular-weight olefinic gases. Some of its properties are listed:

1. The viscosity at high temperature is about 30 times that of the higher-viscosity petroleum oil most widely used for cable impregnation. The low temperature characteristics are such that no difficulty results from installation at the minimum temperature (−10 degrees centigrade) considered normal in practice in the United States.

2. The oil is very stable electrically and its power factor is so low that it contributes only a negligible portion of the cable dielectric loss.

3. The oil is inherently of exceedingly low sulphur content, much lower than for natural petroleum oils, because of its production from low-molecular-weight olefinic gases which can be and are thoroughly freed from sulphur compounds.

The process of producing the *HC* oil raises a question of the possibility of a small content of organically bound chlorine. However, all of the oil used for the commercial production of the 1948 cable has a chlorine content of less than 0.01 per cent. Furthermore, extensive aging tests of paper impregnated with oil having four times this chlorine content have been made. In comparison with control tests on similar paper with various oils of low chlorine content, no difference is apparent in the aging characteristics.

Regarding the possible use of this oil in the more conventional mass-impregnation of cables, a careful investigation revealed that, with practical modifications of conventional methods, this would be entirely feasible. Essentially, this meant drying and impregnating at a temperature within the maximum range used for solid-type cable, but keeping the entire length at approximately this chosen temperature. In order to obtain the required uniformity of temperature for the mass-impregnation with the high-viscosity oil, electrical-conductor heating for drying became a requirement for long commercial lengths. With such heating, and with the use of pressure on the oil during the process, complete impregnation could be assured with no longer exposure of the paper to high temperature than in previous good practice.

In order to determine the effect of sudden temperature drops on the ionization starting potential of gas pressure cables impregnated with *HC-3000* oil by means of the mass-impregnation and the preimpregnation method, tests were conducted in which important temperature variations that occur in commercial cable operation were reproduced. In one series of tests, for instance, the cable load suddenly was reduced to zero, when the cable temperatures were stabilized, with the cable suspended in free air at 25 degrees centigrade and a conductor temperature of 100 degrees centigrade, and simultaneously a refrigerant at 0 degrees centigrade was circulated in cooling pipes provided on the outside of the cable. This test was applied several times to each cable sample. It was concluded from this study that the minimum ionization potential resulting during sudden temperature drops was safely above potentials that occur during normal service operation.

Performance tests for comparison of mass-impregnated and preimpregnated cables have been under way in Detroit in an experimental field installation since August 1947. Continuous load has been applied for a total of approximately 1,940 hours, with the conductor temperature at 100 degrees centigrade during most of the time. This was followed by 310 daily load cycles of 12-hour heating periods to 100-degree-centigrade conductor temperature and 12-hour cooling periods. A potential of 120 kv, three phase, was applied to the cable during all loading schedules. Power factor measurements made during the load tests have shown no significant change in the insulation.

Digest of paper 49-84, "High-Pressure Gas-Filled Cable Impregnated With Extra-High-Viscosity Oil," recommended by the AIEE Insulated Conductor Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

Joseph Sticher and G. H. Doan are with the Detroit Edison Company, Detroit, Mich.; R. W. Atkinson and Louis Meyerhoff are with the General Cable Corporation, Bayonne, N. J.

Facsimile Transmission Speed

HENRY F. BURKHARD

OF GROWING importance to facsimile engineers is the problem of increasing the transmission speed. The speed may be increased by using special scanning methods, improving means for modulation and demodulation, using the available channel more efficiently, and using wider transmission channels.

Speed of transmission usually is limited by the usable band width of the available wire or radio transmission circuit and in some instances by the maximum recording speed of the recording medium. Since the scanning spot is just as likely to scan wide areas of constant shading as to scan isolated narrow lines, the frequency range of signals generated in the photocell circuit is from practically d-c to an infinite frequency. In a practical design, this range is considered to be from d-c to the fundamental frequency generated by the scanning of alternate black and white lines, each equal in width to the scanning aperture. When scanning an isolated spot equal in width to the scanning aperture, a continuous spectrum of frequency is generated. This spectrum may be found by means of a standard Fourier series analysis by assuming that the triangular wave which is generated is narrow and recurs at regular but widely separated intervals of time.

A second method for finding the frequency distribution is to treat the triangular pulse as an isolated pulse and insert its time function in the Fourier integral

$$f(w)=\frac{1}{2\pi}\int_{-\infty}^{\infty} f(t)\epsilon^{-jwt}dt$$

where $f(t)$ is found from the time plot of the pulse. For the triangular pulse, the result is

$$F(w)=\frac{1800E}{\pi}\left[\frac{1-\cos\dfrac{w}{1800}}{w^2}\right]$$

Both methods of analysis yield the same result.

Attempts are being made to utilize the available channel more efficiently. Delay distortion is usually the critical factor. The time of transmission of any single steady-state frequency through a medium is equal to the total phase shift in radians divided by 2π times the frequency. The inverse of this time usually is called the phase velocity. For practically distortionless transmission of modulation on a carrier, however, the criterion is that the envelope transmission time be constant over the frequency range being used. This envelope transmission time is equal to the slope of the phase-shift-versus-w curve. This latter curve, therefore, should be a straight line over the required frequency range. It was found that facsimile transmissions with a 1,000-cycle-per-second fundamental picture frequency were satisfactory when the envelope delay time at any and all frequencies in the required frequency spectrum was within ±250 microseconds of the mean envelope delay time of the required spectrum. In a special case when vestigial single-side-band modulation is employed, the ±250 microsecond need only hold over the frequencies ranging from the carrier frequency minus the vestigial frequency to the carrier frequency plus the vestigial frequency, provided the envelope delay time for all other frequencies in the required spectrum is held to within ±500 microseconds of the mean envelope delay time. To find the permissible envelope delay time for other than 1,000-cycle-per-second picture frequencies, divide the foregoing limits by the new picture frequency in kilocycles.

When the modulating frequencies exceed half the value of the carrier frequency, special precautions should be taken for modulation and demodulation. One method proposed by Radio Inventions, Inc., employs a carrier equal to about four times the maximum modulating frequency. The modulated signal is heterodyned down, and all but the lowest side-band signals are eliminated. Although the picture or modulating frequency is 2,400 cycles for newer low-speed equipment, these lowest side-band frequencies all fall within the contemplated Army voice channel. At the receiving machine, the signals are heterodyned back up prior to detecting and recording. The Radio Corporation of America, under Signal Corps contract, developed another method of detection in which the received signals are heterodyned with the sine and cosine waves of a higher frequency prior to detection.

The Times Facsimile Corporation normally accomplishes modulation within the phototube while utilizing a bridge circuit. They developed a balanced photocell arrangement to eliminate the modulating frequency components from the output of the bridge. This permitted higher ratios of modulating to carrier frequencies, since it no longer was necessary to separate the modulating frequency and the modulation products by filtering.

A study is in progress on the transmission of facsimile over wider channels up to 192 kc in width. Experimental equipment is being constructed to operate over 16-, 48-, 96-, and 192-kc channels. Since the practical limit of recording speed for the recording medium normally only would permit operation on the 48-kc channel, another means was investigated. Multiple scanning heads and recording helices to permit the scanning of one, two, or four scanning lines simultaneously were suggested. Since each line is scanned at a relatively slow rate of speed, the wet electrolytic medium was found to be satisfactory even at the 192-kc recording speed. At this higher rate of speed, it is anticipated that an 8-by-$10^1/_2$-inch facsimile image will be transmitted every seven seconds.

Digest of paper **49-108** "Considerations of Facsimile Transmission Speed," recommended by the AIEE Communication Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

Henry F. Burkhard is with the Signal Corps Engineering Laboratory, Long Branch, N. J.

Transmission Line Charts

HERBERT L. KRAUSS
ASSOCIATE AIEE

The use of charts to reduce the labor in solving problems involving high-frequency transmission lines and wave guides has increased considerably. This article presents details of the development and problems illustrating applications of the two most commonly used types of charts. It was written primarily for students and practicing engineers who use the charts without knowing the background.

THIS ARTICLE contains no new information on the use of transmission line charts. However, for the benefit of persons not familiar with the charts and their applications, and for those who may have used the charts without knowing the theory involved, the development and some applications are presented with the mathematics simplified as much as possible.

When repeated calculations have to be made with complicated equations, a graphical solution often reduces the labor required. In the last decade much research has been done on transmission lines, wave guides, and antennas, and the same charts have been found useful for solving problems in all these fields.[1] Line charts are helpful in visualizing the manner in which the line input impedance varies with frequency, line length, or terminating impedance, and in determining the effects of mismatching, the points where matching stubs should be connected, points of maximum and minimum impedance, and so on. A variety of charts has been developed, depending upon the type of co-ordinates used, location of the origin, and choice of parameters. Only the two types most generally used, hereafter referred to as the rectangular chart and Smith chart, will be explained. The Smith chart[2,3] is the more popular of the two because it can handle calculations involving line attenuation more easily.



Figure 1. Definition of symbols



Figure 2. Definition of standing wave ratio

Definition of Symbols. Reference to Figures 1 and 2 will supplement the definitions to follow.

Z_R = line terminating impedance (receiving end)

Z_O = line characteristic impedance

$Z_S = \frac{E_S}{I_S}$ = input impedance of a line of length S

S = distance measured from the load toward the input terminals

E_R, I_R = load voltage and current

E_S, I_S = voltage and current at a distance S from the load

E ,I^+ = incident-wave components of voltage and current, traveling toward the load

E^-, I^- = reflected-wave components of voltage and current, traveling toward the generator (Note that $E_S = E_S^+ + E_S^-$, $I_S = I_S^+ + I_S^-$, and so on)

$\gamma = \alpha + j\beta$ = complex propagation constant of the line

$\rho = \frac{E_{\max}}{E_{\min}} = \frac{I_{\max}}{I_{\min}}$ = standing wave ratio (see Figure 2)

$K = |K|\,\epsilon^{j\phi} = \frac{Z_R - Z_O}{Z_R + Z_O} = \frac{E_R^-}{E_R^+}$ = receiving-end reflection coefficient

$K_S = |K_S|\epsilon^{j\phi} = \frac{E_S^-}{E_S^+} = K\epsilon^{-2\gamma S}$ = equivalent sending-end reflection coefficient looking toward the load

Other symbols will be defined later as they are introduced in the article.

RECTANGULAR CHART

The input impedance of a line of length S, terminated in an arbitrary impedance, Z_R, is given by

$$Z_S = Z_O\left[\frac{Z_R + Z_O \tanh \gamma S}{Z_O + Z_R \tanh \gamma S}\right] \tag{1}$$

Now define the "normalized" input impedance as

$$z_1 = r_1 + jx_1 = \frac{Z_S}{Z_O} = \frac{Z_R + Z_O \tanh \gamma S}{Z_O + Z_R \tanh \gamma S} \tag{2}$$

The subsequent development will show that the locus of values of z_1 as S is varied is a circle (for a dissipationless line) if r_1 and x_1 are plotted on rectangular-co-ordinate axes. Thus the variations in z_1 as a function of S may be read directly from the graph once the circle has been plotted.

From the definitions of symbols previously given the following expressions may be obtained:[5]

$$E_S^+ = E_R^+ \epsilon^{\gamma S} \tag{3}$$

$$E_S^- = E_R^- \epsilon^{-\gamma S} \tag{4}$$

$$E_S = E_S^+ + E_S^- = E_R^+ \epsilon^{\gamma S} + E_R^- \epsilon^{-\gamma S} \tag{5}$$

But the receiving-end reflection coefficient is defined as

$$K = |K|\epsilon^{j\phi} = \frac{E_R^-}{E_R^+} = -\frac{I_R^-}{I_R^+} \tag{6}$$

Herbert L. Krauss is Assistant Professor of Electrical Engineering, Yale University, New Haven, Conn.

Solving equation 6 for E_R^- and substituting in equation 5 gives

$$E_S=E_R^+\epsilon^{\gamma S}+KE_R^+\epsilon^{-\gamma S}$$

$$E_S=E_R^+\epsilon^{\gamma S}[1+K\epsilon^{-2\gamma S}] \tag{7}$$

Now define a reflection coefficient, K_S, at a distance S from the load by expression 8. (Note that this is not equivalent to the sending-end reflection coefficient usually defined by the ratio $\frac{Z_s-Z_o}{Z_s+Z_o}$ in the literature.)

$$K_S=|K_S|\epsilon^{j\phi_S}\equiv\frac{E_S^-}{E_S^+}=\frac{E_R^-\epsilon^{-\gamma S}}{E_R^+\epsilon^{\gamma S}}=K\epsilon^{-2\gamma S} \tag{8}$$

Substituting $\gamma=\alpha+j\beta$ in the above equation, and equating the magnitudes and angles of the resulting expression yields

$$|K_S|=|K|\epsilon^{-2\alpha S} \tag{8a}$$

(Note that $|K_S|=|K|$ if $\alpha=0$) and

$$\phi_S=\phi-2\beta S \tag{8b}$$

Using equation 8, equation 7 may be written

$$E_S=E_R^+\epsilon^{\gamma S}[1+K_S] \tag{9}$$

and by a similar development

$$I_S=I_R^+\epsilon^{\gamma S}[1-K_S]=\frac{E_R^+\epsilon^{\gamma S}}{Z_o}[1-K_S] \tag{10}$$

Then using $Z_s=\frac{E_S}{I_S}$ and dividing by Z_o to get the normalized input impedance

$$\frac{Z_S}{Z_o}=z_1=r_1+jx_1=\frac{1+K_S}{1-K_S} \tag{11}$$

Clearing fractions and solving for K_S,

$$K_S=|K_S|\epsilon^{j\phi_S}=\frac{r_1-1+jx_1}{r_1+1+jx_1} \tag{12}$$

Now equate the squared magnitudes of the two sides of expression 12

$$|K_S|^2=\frac{(r_1-1)^2+x_1^2}{(r_1+1)^2+x_1^2} \tag{13}$$

By clearing fractions in equation 13, collecting terms, and dividing through by $(1-|K_S|^2)$, the expression

$$r_1^2-2r_1\left[\frac{1+|K_S|^2}{1-|K_S|^2}\right]+x_1^2=-1 \tag{14}$$

is obtained. Upon completing the square for the r_1-terms in equation 14 the equation becomes

$$\left[r_1-\frac{1+|K_S|^2}{1-|K_S|^2}\right]^2+x_1^2=\left[\frac{2|K_S|}{1-|K_S|^2}\right]^2 \tag{15}$$

This is the equation of a circle in the rectangular co-ordinates (r_1, x_1), with its center at

$$r_1=\frac{1+|K_S|^2}{1-|K_S|^2},\ x_1=0,\text{ and radius}=\frac{2|K_S|}{1-|K_S|^2} \tag{16}$$

As various values are assigned to $|K_S|$, a family of circles surrounding (but not concentric with) the point (1, 0) is obtained (see Figure 3).

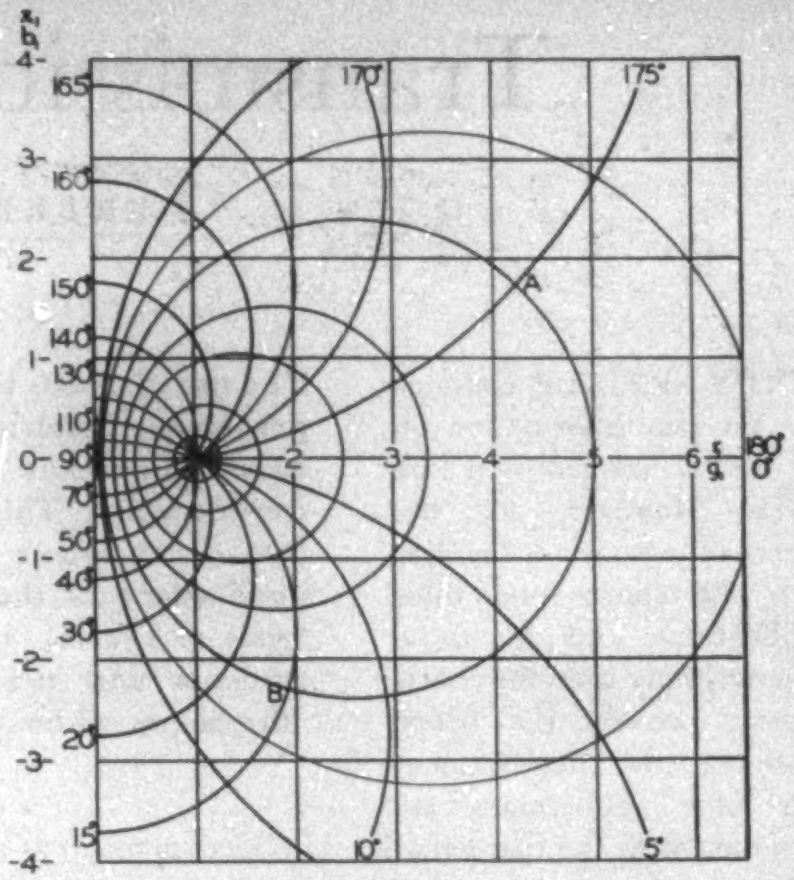

Figure 3. Rectangular form of line chart

For a dissipationless line, $|K_S|=|K|$ at any value of S, and the circle-representing a constant value of $|K|$ would be the locus of the values of the normalized input impedance $\frac{Z_s}{Z_o}=r_1+jx_1$, as the distance S from the load is varied. On a line with dissipation the normalized load impedance, $\frac{Z_R}{Z_o}$, would be found on the circle determined by the value of $|K|$, whereas the input impedance, $\frac{Z_s}{Z_o}$, would be located on the corresponding $|K_S|$-circle determined from $|K_S|=|K|\epsilon^{-2\alpha S}$. This evidently would cause the locus of $\frac{Z_s}{Z_o}$ to move inward toward the point (1, 0) as S increases. The path would not be an ordinary spiral, however, because the successive $|K|$-circles are not concentric.

A chart containing only the constant $|K|$ circles would be incomplete because it would provide no means of determining how the impedance value moves along a given $|K|$-circle as a function of S, the distance from the load. Unfortunately, the arc-length traversed is not a linear function of S, so another set of curves for measuring this distance must be derived. The "line angle", βS, is a convenient unit for representation of distance on the chart because it can represent changes in frequency as well as changes in physical length. Referring to equations 8*b* and 12, ϕ_S is the angle which contains the desired parameter, βS. Thus, if the angles on the two sides of equation 12 are equated

$$\phi_S=\tan^{-1}\left(\frac{x_1}{r_1-1}\right)-\tan^{-1}\left(\frac{x_1}{r+1}\right) \tag{17}$$

or

$$\phi_S+\tan^{-1}\left(\frac{x_1}{r_1+1}\right)=\tan^{-1}\left(\frac{x_1}{r_1-1}\right) \tag{17a}$$

Equating the tangents of the angles represented by the equality 17a,

$$\tan\left[\phi_S+\tan^{-1}\left(\frac{x_1}{r_1+1}\right)\right]=\frac{x_1}{r_1-1} \tag{18}$$

and making use of the tangent of the sum of two angles equation 18 becomes

$$\frac{x_1}{r_1-1}=\frac{(r_1+1)\tan\phi_S+x_1}{r_1+1-x_1\tan\phi_S} \tag{19}$$

By cross-multiplication, collection of like terms, and completion of the square in the x_1-terms this becomes

$$r_1^2+\left[x_1-\frac{1}{\tan\phi_S}\right]^2=\frac{1}{\sin^2\phi_S} \tag{20}$$

This expression represents a circle in the rectangular coordinates (r_1, x_1) with radius $\left(\frac{1}{\sin\phi_S}\right)$ and its center at

$$r_1=0,\ x_1=\frac{1}{\tan\phi_S} \tag{21}$$

The circle represents the locus of all points having a constant value of ϕ_S. Choosing a series of values of ϕ_S results in a family of circles that pass through the point (1, 0) and that have their centers on the x_1-axis. (See Figure 3).

In using the chart the angle βS usually is required, rather than ϕ_S. The chart is entered at some point such as $\frac{Z_R}{Z_O}=r_1+jx_1$, and then a circle of constant $|K|$ (or a path corresponding to $|K|\epsilon^{-2\alpha S}$) is followed through an angle βS to locate the new point which defines $\frac{Z_S}{Z_O}$. Thus the chart is marked more conveniently in values of βS rather than ϕ_S. This may be done by assuming that K is real (obtained, for example, if $Z_O=R_O$ and $Z_R=R_R>R_O$), whereupon $\phi=0$ and $\phi_S=-2\beta S$. Then the circle obtained by substituting a given value of ϕ_S in equation 20 is designated on the chart by $\frac{-\phi_S}{2}=\beta S$. Thus the final form of the chart is obtained.

USE OF THE RECTANGULAR CHART

Input Impedance. Assume that the input impedance of a line of length S is to be determined when Z_O, α, β, and Z_R are known. The steps to be followed are

1. Calculate $\frac{Z_R}{Z_O}=r_1+jx_1$
2. Enter the chart at this point and move clockwise (the direction of increasing S) along a circle of constant $|K|$ through the angle βS.
3. If $\alpha=0$, read $r_1+jx_1=\frac{Z_S}{Z_O}$ at the point found in step 2.
4. If $\alpha>0$, calculate $|K_S|=|K|\epsilon^{-2\alpha S}$, and move along the final βS-circle found in step 2 from the $|K|$-circle to the $|K_S|$-circle. This locates the final point $\frac{Z_S}{Z_O}$. (The reader may recognize that the $|K|$-circles could be designated more conveniently in terms of the standing wave ratio, ρ, or the attenuation, αS, in nepers or decibels. This will be discussed in connection with the Smith chart).
5. Calculate $Z_S=Z_O(r_1+jx_1)$ at the point located in steps 3 or 4 to complete the problem.

Example. Suppose that $Z_R=423+j175$, $Z_O=100+j0$, $\alpha=0$, and $\beta S=20$ degrees. The value of Z_S is to be found. Following the steps gives

1. $\frac{Z_R}{Z_O}=4.23+j1.75$. Enter the chart at this point (point A in Figure 3). This is on the circle for $\beta S=175$ degrees.
2. Add 175 degrees+20 degrees=195 degrees. On the chart this is found as 15 degrees, and represents a 20-degree clockwise rotation from the original point.
3. Where the 15-degree circle intersects the $|K|$-circle containing the initial point, read $\frac{Z_S}{Z_O}=1.92-j2.30$ (point B in Figure 3).
4. Then $Z_S=Z_O\,(1.92-j2.30)=192-j230$ ohms.

Input Admittance. Let

$$Y_S=\frac{1}{Z_S},\ Y_O=\frac{1}{Z_O},\ \text{and}\ \frac{Y_S}{Y_O}=y_1\equiv g_1+jb_1 \tag{22}$$

Then by inverting equation 11

$$\frac{Y_S}{Y_O}=\frac{1-K_S}{1+K_S}=g_1+jb_1 \tag{23}$$

This expression results in the same families of circles as were obtained from equation 11. Thus Figure 3 becomes an admittance chart if r_1 is replaced by g_1, and x_1 by b_1. The procedure for admittance calculations is identical with that given for impedances. Calculations on an admittance basis are preferable if loads or matching stubs are connected across the line.

Conversion of Impedance to Admittance. This utilizes the relationship between the input and output impedances of a quarter-wave length dissipationless line. On such a line Z_O is purely resistive, $\alpha=0$, $\beta S=90$ degrees, and expression 1 may be simplified to yield

$$Z_SZ_R=Z_O^2 \tag{24}$$

Using equation 22 this may be written as

$$\frac{Z_S}{Z_O}=\frac{Z_O}{Z_R}=\frac{Y_R}{Y_O} \tag{25}$$

Thus the normalized impedance at some point on a line is equal to the normalized admittance a quarter wave length away. Therefore, the reciprocal of any normalized impedance value on the chart may be found by moving the point along the proper $|K|$-circle through an angular distance of 90 degrees.

Open-Circuited or Short-Circuited Dissipationless Lines. A short-circuited line has zero load impedance, and with no dissipation the input impedance is a pure reactance as S is varied. The locus of these points is the $|K|$-circle of infinite radius that corresponds to the x_1-axis of the chart. The input susceptance of an open-circuited line also has the imaginary axis as its locus.

Obviously, this chart cannot include impedance or admittance values equal to infinity, such as would be encountered on open- or short-circuited lines. The Smith chart does not have this limitation.

Other Uses. Many other calculations involving impedance-matching stubs, quarter-wave impedance transformers, and broad-band impedance-matching devices are simplified by using this chart. However, no further examples will be given because the Smith chart handles the same calculations with equal or greater facility.

SMITH CHART

The Smith chart shown in Figure 11 represents the same information as the chart of Figure 3. The straight-line loci of constant r_1 or x_1 in the rectangular chart become circles in the Smith chart as will be shown presently. The conversion of the first form of chart to the second may be made by means of a conformal transformation, but in this paper the Smith chart will be developed independently from the line relationships given in a foregoing section. The development for the rectangular chart may be followed through equations 9 and 10. Using equation 8, equations 9 and 10 may be written as

$$E_S = E_R{}^+\epsilon^{\alpha S}[\epsilon^{j\beta S} + |K_S|\epsilon^{j(\phi-\beta S)}] \qquad (9a)$$

$$I_S = \frac{E_R{}^+\epsilon^{\alpha S}}{Z_0}[\epsilon^{j\beta S} - |K_S|\epsilon^{j(\phi-\beta S)}] \qquad (10a)$$

Then

$$z_1 = \frac{Z_S}{Z_0} = \frac{\epsilon^{j\beta S} + |K_S|\epsilon^{j(\phi-\beta S)}}{\epsilon^{j\beta S} - |K_S|\epsilon^{j(\phi-\beta S)}} \qquad (26)$$

Multiply numerator and denominator of this equation by $[\epsilon^{-j\beta S} - |K_S|\epsilon^{-j(\phi-\beta S)}]$ and combine coefficients of the $|K_S|$-terms to get

$$z_1 = r_1 + jx_1 = \frac{1 - |K_S|^2 + |K_S|[\epsilon^{j(\phi-2\beta S)} - \epsilon^{-j(\phi-2\beta S)}]}{1 + |K_S|^2 - |K_S|[\epsilon^{j(\phi-2\beta S)} + \epsilon^{-j(\phi-2\beta S)}]} \qquad (27)$$

Using equation 8*b*,

$$z_1 = r_1 + jx_1 = \frac{1 - |K_S|^2 + j2|K_S|\sin\phi_S}{1 + |K_S|^2 - 2|K_S|\cos\phi_S} \qquad (27a)$$

Equating the real and imaginary parts gives

$$r_1 = \frac{1 - |K_S|^2}{1 + |K_S|^2 - 2|K_S|\cos\phi_S} \qquad (28)$$

$$x_1 = \frac{2|K_S|\sin\phi_S}{1 + |K_S|^2 - 2|K_S|\cos\phi_S} \qquad (29)$$

These are the equations of circles in the polar co-ordinates $(|K_S|, \phi_S)$. Because equations 28 and 29 are not recognized easily as equations of circles, a transformation from polar co-ordinates $(|K_S|, \phi_S)$ to rectangular co-ordinates (u, v) will be made through the relationships obtainable from Figure 4.

From the figure:

$$u = |K_S|\cos\phi_S,\ v = |K_S|\sin\phi_S, \text{ and } |K_S|^2 = u^2 + v^2 \qquad (30)$$

Applying the transformation equation 30 to equations 28 and 29 yields

$$r_1 = \frac{1 - u^2 - v^2}{1 + u^2 + v^2 - 2u} \qquad (31)$$

$$x_1 = \frac{2v}{1 + u^2 + v^2 - 2u} \qquad (32)$$

Cross-multiplying equation 31, collecting terms, and completing the square in u results in

$$\left[u - \frac{r_1}{r_1+1}\right]^2 + v^2 = \left[\frac{1}{r_1+1}\right]^2 \qquad (33)$$







Figure 4 (top left). Transformation from polar to rectangular co-ordinates

Figure 5 (lower left). Circles having r_1 constant

Figure 6 (right). Circles having x_1 constant

If various values of r_1 are chosen, this equation defines a family of circles in the rectangular co-ordinates (u, v) with centers at

$$u = \frac{r_1}{r_1+1},\ v = 0; \text{ and the radius} = \frac{1}{r_1+1} \qquad (34)$$

All of these circles pass through the point (1, 0) as shown in Figure 5.

By a similar procedure, equation 32 may be converted to

$$[u-1]^2 + \left[v - \frac{1}{x_1}\right]^2 = \frac{1}{x_1^2} \qquad (35)$$

This gives a family of circles for constant values of x_1, with centers at

$$u = 1,\ v = \frac{1}{x_1}, \text{ and radius} = \frac{1}{x_1} \qquad (36)$$

All of these circles also pass through the point (1, 0), (see Figure 6).

In the development of the rectangular chart a circle of constant $|K|$ was shown to represent the locus of input-impedance values on a dissipationless line. On the polar-co-ordinate chart now under discussion, the loci of constant $|K|$ are circles concentric about the origin as may be seen from the relationships of equation 30. The expressions of equation 30 also indicate that the loci of constant angle ϕ_S are now radial lines from the origin, and that a given line angle βS represents a constant length of arc at any point on a given $|K|$-circle.

Figure 7 illustrates the constant-$|K|$ circles, and a typical scale of line angles. Since the value of ρ, the standing wave ratio, rather than the value of $|K|$ generally is known in experimental work with lines and wave guides, the $|K|$-circles usually are specified in terms of the corresponding value of ρ.

Their relationship is given by the following expression:

$$\rho=\frac{E_{\max}}{E_{\min}}=\frac{1+|K|}{1-|K|} \tag{37}$$

The value of ρ for a given circle is also equal to the r_1-coordinate (greater than 1) at which the ρ-circle crosses the u-axis of the chart. This is explained in the "applications" section. Corresponding values of ρ and K are indicated in Figure 7. An arbitrary angular scale calibrated in terms of $\beta S=-\frac{\phi_S}{2}$ with $\phi=0$, is shown also. Note that a complete revolution on a $|K|$-circle corresponds to a change of 180 degrees in the line angle because the standing-wave pattern and the input impedance values repeat at half-wave length intervals along a dissipationless line.

Now Figures 5, 6, and 7 may be combined to give the complete form of the Smith chart shown in Figure 8. The angular scale shown here ordinarily is replaced by a wave length scale (see Figure 11) whose zero point is chosen arbitrarily. A rotatable wave length scale would be desirable, since the measurement of line angle, βS, may begin at any desired value of $\frac{Z_R}{Z_0}$.

Lines with attenuation can be handled easily with this chart. The locus of input impedance becomes a logarithmic spiral described by $|K_S|\epsilon^{j\phi_S}$, where $|K_S|=|K|\epsilon^{-2\alpha S}$, instead of the circle obtained for dissipationless lines. Since the value of ρ at the load, rather than $|K|$, generally will be known; a means of finding the standing wave ratio ρ_S at a distance S from the load would be useful. Referring to equation 37, an expression similar to this may be written for the point S.



Figure 7. Constant-K circles

$$\rho_S=\frac{1+|K_S|}{1-|K_S|} \tag{38}$$

Combining equations 37, 38, and 8*a* gives

$$\rho_S=\frac{\epsilon^{2\alpha S}+\left(\frac{\rho-1}{\rho+1}\right)}{\epsilon^{2\alpha S}-\left(\frac{\rho-1}{\rho+1}\right)} \tag{39}$$

for calculating the standing wave ratio at the input end of a line with dissipation when the attenuation constant and the load standing wave ratio are known. As an alternative, an attenuation scale may be provided for the chart by assuming that $\rho=1$ in equation 39, solving the expression to get

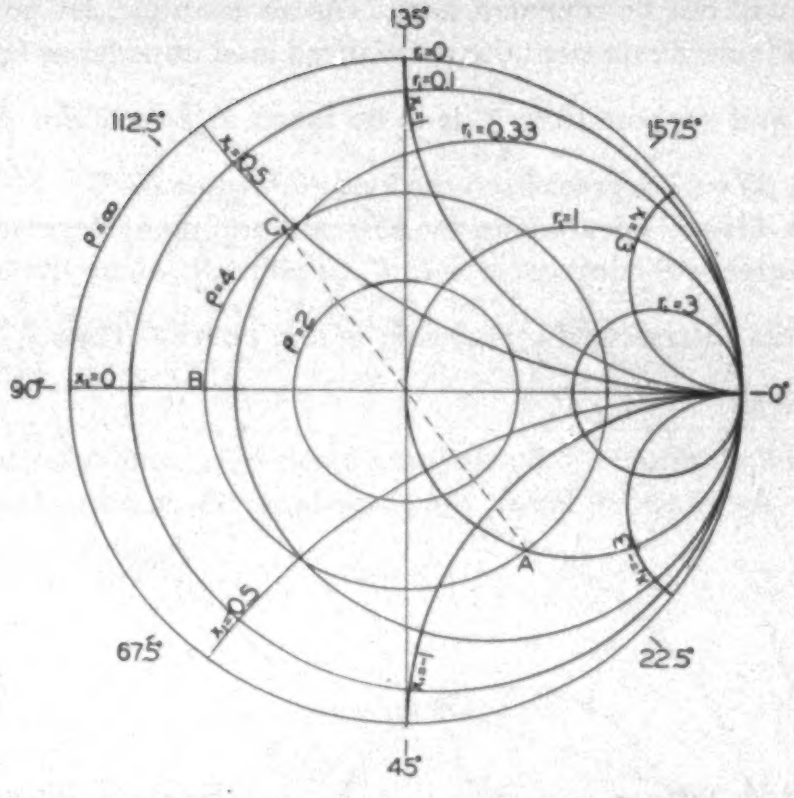

Figure 8. Abbreviated form of the Smith chart

$$\alpha_S=\frac{1}{2}\ln\left[\frac{\rho_S+1}{\rho_S-1}\right] \tag{40}$$

and evaluating αS in nepers or decibels as shown in the table. Once such a scale has been determined, the difference in attenuation readings for the actual values of ρ and ρ_S gives the correct value for αS.

ρ_S	αS in Nepers	αS in Decibels
∞	0.0000	0.000
20	0.0495	0.430
10	0.0995	0.864
5	0.203	1.77
2	0.550	4.78
1.5	0.805	6.99
1.1	1.522	13.22
1.05	1.857	16.13
1.02	2.305	20.02

Comparing Figures 3 and 8, a number of advantages of the polar form of the chart are immediately apparent:

1. The βS-scale is uniform in terms of the arc traversed on a given $|K|$ or ρ-circle, whereas this is not true of the rectangular chart.
2. All values of impedance (or admittance) from zero to infinity are found on the chart; that is, there are no $|K|$-circles of infinite radius.
3. The $|K|$-circles are concentric and equally spaced for equal increments in $|K|$. Thus a given amount of attenuation reduces the length of the radius vector ($|K|$) by a fixed amount at any polar angle.
4. Both the input impedance and input admittance of open-circuited lines may be found on the Smith chart. On the other hand the rectangular chart has the advantage that impedance or admittance values are represented directly by vectors drawn from the origin to the point in question, so that variations in magnitude and phase are visualized readily. This is not true of the Smith chart.

APPLICATIONS OF THE SMITH CHART

Input Impedance. The steps to be followed are identical with those outlined for the rectangular chart; therefore, they will not be repeated here. As an example, let point A in Figure 8 represent the normalized load impedance for a line, and suppose that $\frac{Z_S}{Z_O}$ is to be found at an angular distance $\beta S = 63$ degrees from the load. Assume $\alpha = 0$. Since point A is at 27 degrees on the βS-scale, adding 63 degrees + 27 degrees = 90 degrees locates Z_S at point B, where the $\rho =$ 4 circle intersects the real axis of the chart. Thus $\frac{Z_S}{Z_O} = 0.25 + j0$.

Input Admittance. By defining $y_1 \equiv g_1 + jb_1$, and substituting g_1 for r_1 and b_1 for x_1, the chart becomes an admittance chart. (On the standard Smith chart read "conductance" for "resistance," and "susceptance" for "reactance.") The input admittance at a given distance from a known load admittance may be found in exactly the same way as the impedance calculation in the foregoing.



Figure 9. Illustration of the components of equation 44

Conversion of Impedance to Admittance. The principles already have been outlined in connection with the rectangular chart. The operation is much simpler on the Smith chart, however, because a 90 degree rotation (in βS) from an impedance to its corresponding admittance is represented by an actual angle of 180 degrees, thus placing the two points at opposite ends of a diameter of the corresponding ρ-circle. For example, point C in Figure 8 represents the admittance equivalent to the impedance of point A. If $\frac{Z_R}{Z_O}$ is found at A, the co-ordinates of C represent $\frac{Y_R}{Y_O}$.

Standing Wave Maxima and Minima on Dissipationless Lines. The standing wave ratio ρ and the position of a voltage maximum or minimum are the quantities most easily measured on high-frequency lines and in wave guides. The location of the voltage maxima and minima on the Smith chart now will be investigated for dissipationless lines, since this information is essential to the determination of unknown load impedances in terms of the measurable quantities mentioned in the foregoing.

On a line with no dissipation, $Z_O = R_O$ and $\alpha = 0$. Referring to equation 11, and substituting the definitions of K_S and K, the normalized input impedance to the line may be expressed as

$$\frac{Z_S}{R_O} = \frac{1+K_S}{1-K_S} = \frac{1+|K|e^{j(\phi-2\beta S)}}{1-|K|e^{j(\phi-2\beta S)}} \qquad (41)$$

The components of this expression are shown in Figure 9. Reference to equations 9 and 10 will show that the magnitude of the line voltage versus distance is determined by $|1+K_S|$, and that the line current magnitude is proportional to $|1-K_S|$. From Figure 9 and equation 41 the line input impedance is evidently a maximum or minimum where the angle $(\phi - 2\beta S)$ is 0 degrees or 180 degrees, respectively.

Thus

$$\frac{Z_{S_{max}}}{R_O} = \rho, \text{ and } \frac{Z_{S_{min}}}{R_O} = \frac{1}{\rho} \qquad (42)$$

These points also correspond to the voltage maximum and minimum, and on the Smith chart they are found where the ρ-circle crosses the axis of $x_1 = 0$.

Determination of Unknown Load Impedance. Assuming that the standing wave ratio and the distance from the load to some convenient voltage minimum can be determined, the value of an unknown load impedance may be found easily with the Smith chart.

Example. Let point B in Figure 8 represent the normalized input impedance at a voltage minimum on a dissipationless line with $\rho = 4$. Assuming that the voltage minimum is 63 degrees from the load, the normalized load impedance is found by moving counterclockwise along the $\rho = 4$ circle to point A.

Addition of Impedance in Series or Parallel at Some Point on the Line. If a series resistance is added to an impedance $\frac{Z}{Z_O}$, or a shunt conductance is added to an admittance $\frac{Y}{Y_O}$ the impedance or admittance locus on the chart moves along a line of constant x_1 or b_1 in the direction of increasing r_1 or g_1.



Figure 10. Use of a single impedance - matching stub on a parallel-wire line

Similarly, if a series reactance or shunt susceptance is added at some point, the impedance or admittance locus moves along a line of constant r_1 or g_1 in the direction of increasing x_1 or b_1, taking the algebraic sign of the added quantity into account.

The added quantities must be normalized; that is, divided by Z_O or Y_O, before the foregoing operations are performed. An example will be given in the next section where a parallel stub line is used for impedance matching.

Impedance Matching with a Single Parallel Stub Line. Figure 10 illustrates the use of a parallel stub line to provide an impedance match between a transmission line and its load.

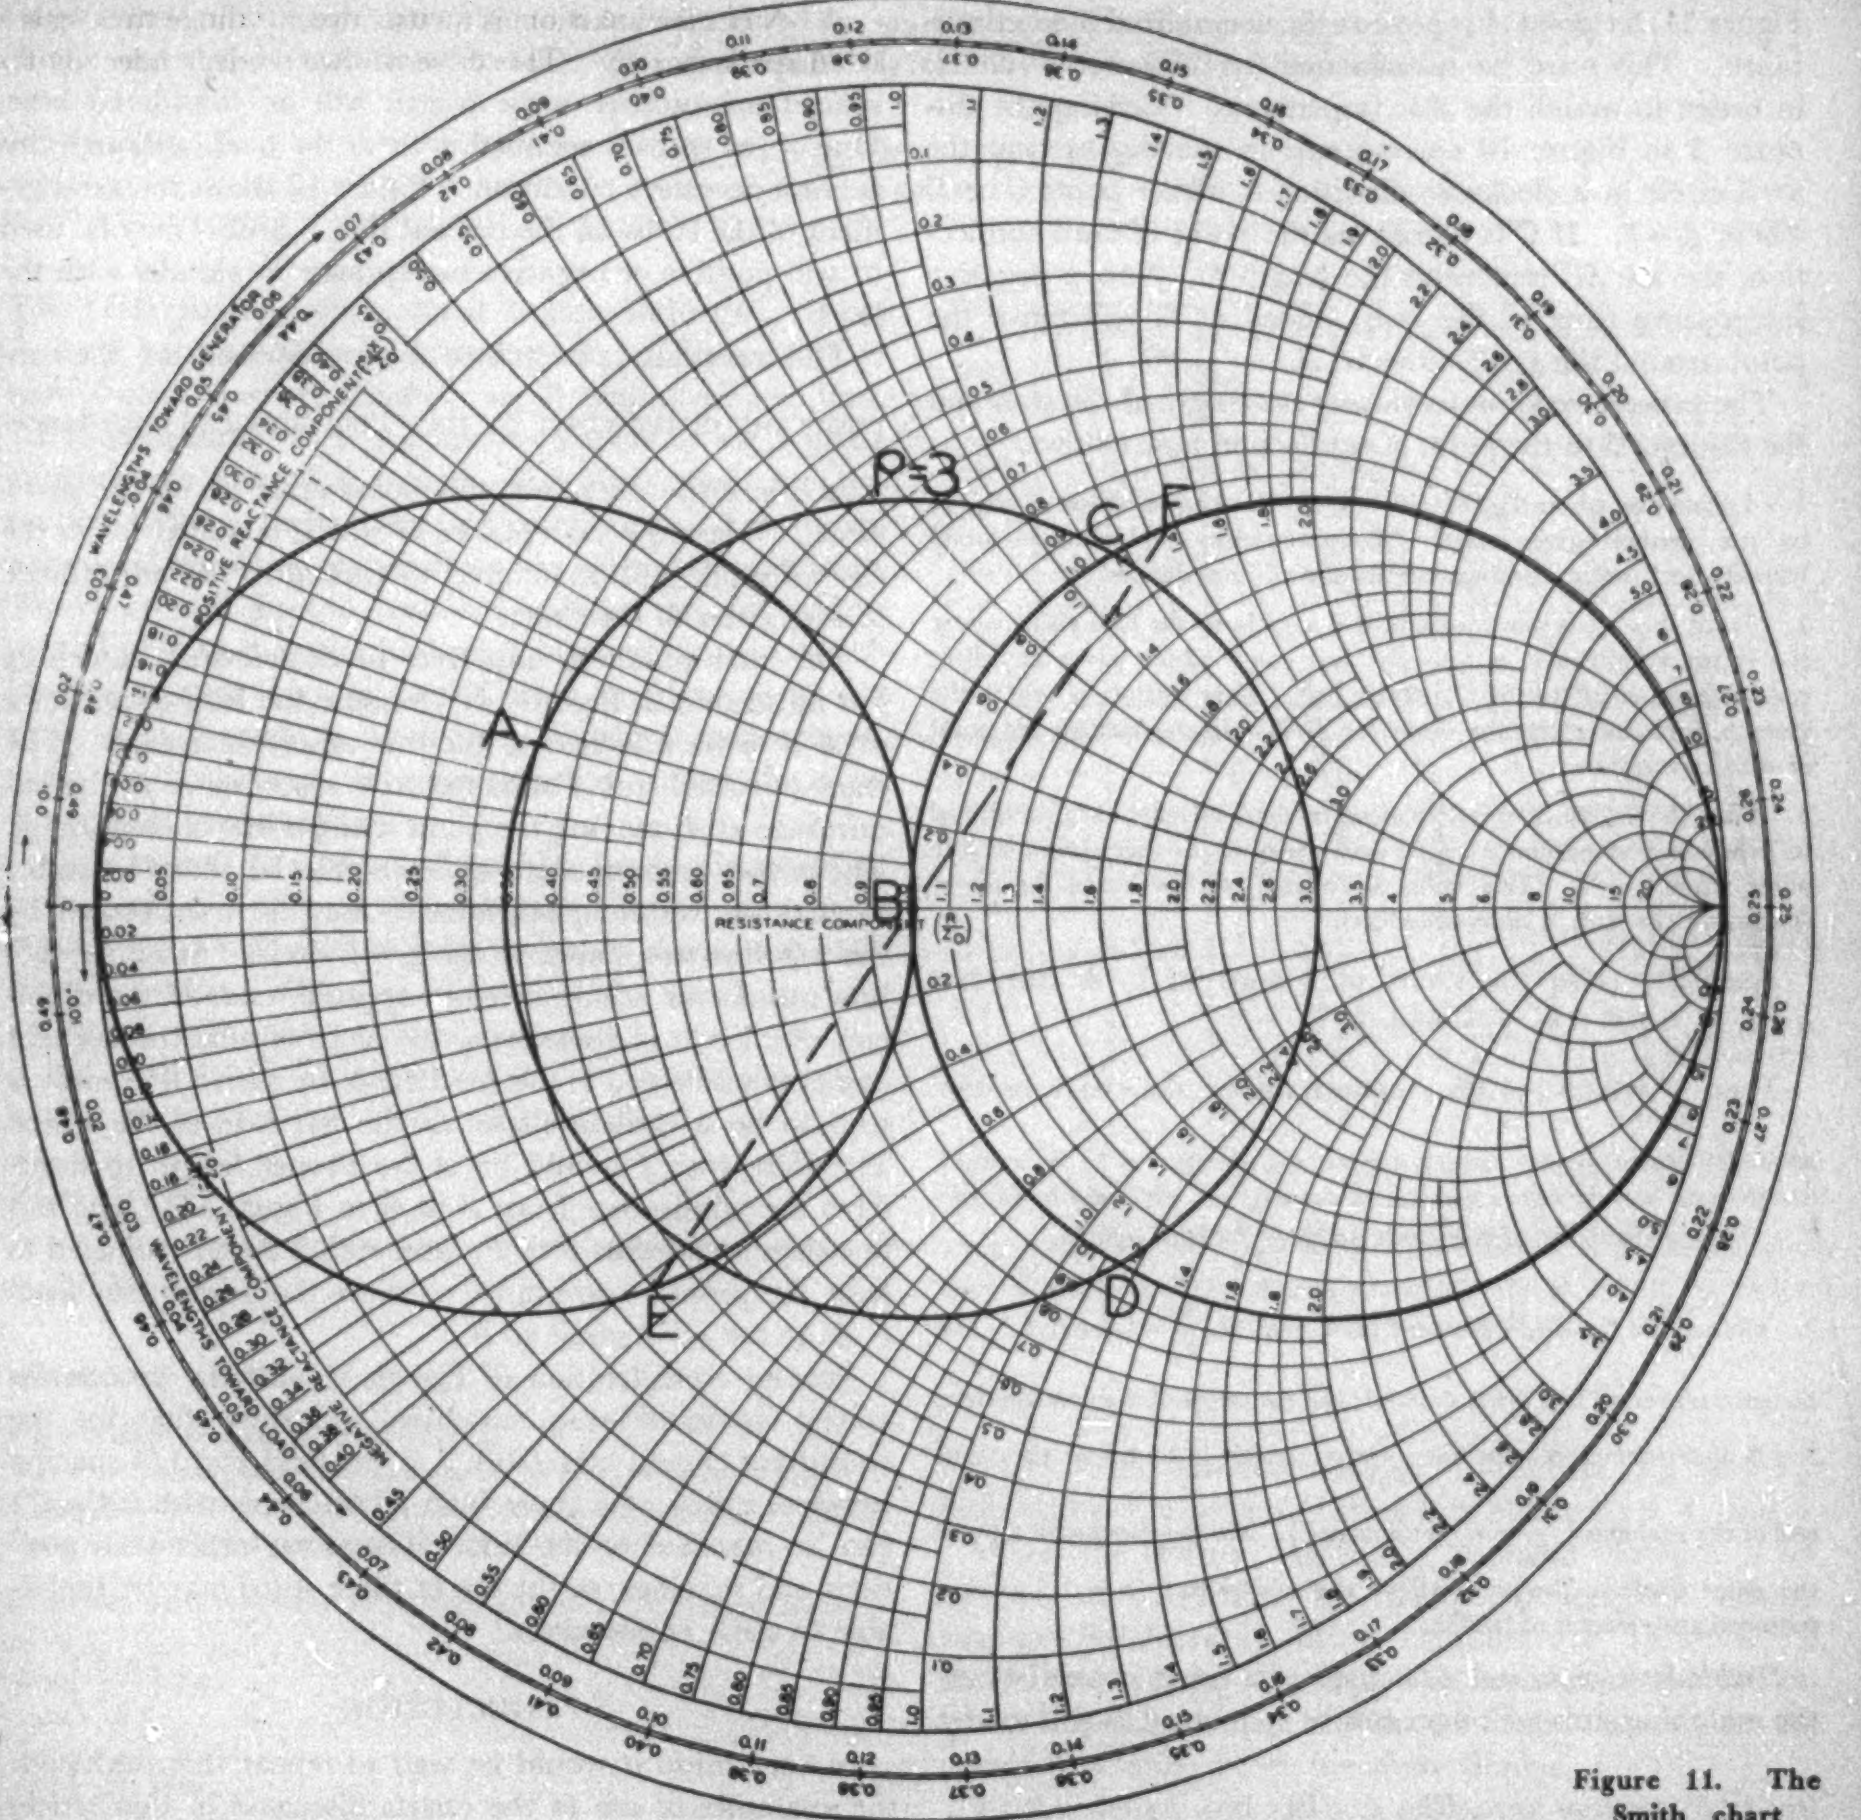
P=3
A
B
C
D
E
F
RESISTANCE COMPONENT $\left(\frac{R}{Z_0}\right)$
WAVELENGTHS TOWARD GENERATOR
WAVELENGTHS TOWARD LOAD
POSITIVE REACTANCE COMPONENT
NEGATIVE REACTANCE COMPONENT

Figure 11. The Smith chart

The distance S from the load to the point of stub connection is chosen so that the input admittance to this length of line terminated in the load Z_R has a conductance component equal to the G_0 ("characteristic conductance") of the line. If the line is dissipationless, $G_0=1/R_0$. At this point an open-circuited or short-circuited dissipationless stub line is connected in parallel, thus providing a parallel susceptance of such a value that the total susceptance at the point will equal the characteristic susceptance of the line. On a dissipationless line, $B_0=0$, therefore the susceptance should be equal and opposite to the input susceptance of the length of line S terminated in Z_R. In either case the line from the generator then will be terminated in its characteristic admittance at the point of stub connection. Standing waves will exist on the stub and on the line between the stub and the load, but not on the line between the generator and the stub. The benefits derived from obtaining an impedance match at the load are that the transmission efficiency of the main line will be increased[5] and that maximum power transfer between the line and load will be obtained.

The matching stub should be placed as close to the load as possible to eliminate standing waves over the major portion of the line from the generator. A short-circuited stub generally is used because the stub length is easier to adjust than that of an open-circuited stub.

The calculation for single-stub matching is illustrated in Figure 11, in which the lines necessary to demonstrate single-stub and double-stub matching have been added to the Smith chart. A lossless line and stub are assumed. In

Figure 11, let point A represent the normalized load admittance. This must be transformed to B (center of chart) in order to match the line impedance. Varying the distance S in Figure 10 corresponds to moving around the $\rho=3$ circle in a clockwise direction to either point C or D where $g_1=1$. If C is chosen as the point of stub connection, the arc AC represents the length S. Now a negative susceptance (due to the stub) added at C will move the point around the $g_1=1$ circle to B.

The procedure for determining the length of the stub and the distance S to the point of connection is as follows:

1. Locate the point Y_R/Y_O either from the known value of Y_R, or by the method given under "Determination of Unknown Load Impedance," using admittances instead of impedances.

2. From this point move around the ρ circle to the first point where the input admittance, $y_1=g_1+jb_1$, has $g_1=1$ which gives an input conductance equal to the G_O of the line. This will occur where the given ρ circle intersects the circle for $R/Z_O=1$, and locates the point of stub connection.

3. Find the length of open-circuited or short-circuited stub required to produce a susceptance equal and opposite to that found at the point where $g_1=1$. This value is located on the circle for $\rho=\infty$ (assuming the stub is dissipationless).

Example. (Use the chart of Figure 11.) A line has $\alpha=0$, $Z_O=100+j0$, $Z_R=65+j115$,

Then $\frac{Z_R}{Z_O}=0.65+j1.15$. Locate this on the chart, on the $\rho=4$ circle.

1. Draw a diameter of the circle to get $\frac{Y_R}{Y_O}=0.37-j0.65$.

2. Go around the circle (toward generator) to $\frac{Y_S}{Y_O}=1.0+j1.5$. The distance traversed is 0.276λ, determining the point of stub connection.

3. A short-circuited stub has $\frac{Y_R}{Y_O}=\infty$, which is found at the right end of the real axis $\left(\frac{R}{Z_O}=\infty \text{ on the chart}\right)$. Moving clockwise around the outer circle to the point where the susceptance is $-j1.5$ gives a required stub length of 0.093λ.

Double-Stub Impedance Matching. In using coaxial lines, the matching stub no longer can be connected at will to any arbitrary point on the line because of the necessity of drilling a hole in the outer conductor. Once this has been done, the stub position cannot be changed when a new load impedance is substituted. One way of overcoming this difficulty is to insert a variable-length section of line between the stub and the load. However, because of the consequent need for flexible lines and the difficulty of making a variable-length section with constant impedance throughout its length, this method is actually not very good for microwave work.



Figure 12. Use of two matching stubs on a coaxial line

A better solution is to use two or three tuning stubs with a fixed spacing. The case of two independently tuned stubs spaced one-quarter wave length will be considered here. One of the stubs is assumed to be at the load, although this is not a necessary condition. Figure 12 shows the arrangement of the stubs on the coaxial line. Stub *1* may be used to add positive or negative susceptance in parallel with the load.

The resulting admittance is transformed to the opposite side of the chart by the $\frac{\lambda}{4}$ line; and if an impedance-match is to be obtained, this point must lie on the $g_1=1$ circle. Then the susceptance of stub *2* is added (as in the case of single-stub matching) to transform the admittance to the center of the chart.

The manipulations involved in double-stub matching are illustrated in Figure 11. Assume the load admittance at A is to be matched to the line admittance at B. The short-circuited stub *1* adds negative susceptance to the admittance at A, moving the point along a line of constant g_1. The proper amount of susceptance must be added by stub *1* so that the resulting admittance may be transformed by the $\lambda/4$ line to a point on the $g_1=1$ circle. Since the $\lambda/4$ line transforms admittances to opposite ends of the diameter of a circle of constant ρ, the locus of admittances that can be transformed to the $g_1=1$ circle by such a line easily is seen to be a similar circle on the left side of the chart. Therefore stub *1* should be of the proper length to transform the admittance from A to E in Figure 11. The $\lambda/4$ line then transforms E to F; and stub *2* then is adjusted to have the proper susceptance to move the admittance from F along the $g_1=1$ circle to B.

Further consideration of Figure 11 and the process involved in double-stub matching will show that for the conditions chosen here (stub *1* at the load and $\lambda/4$ spacing between stubs) only those load admittances with $0 \leq g_1 \leq 1$ can be matched to the line. Therefore, other stub positions and spacings, or the use of three stubs may be preferable in some applications.

CONCLUSION

In conclusion it would be well to repeat that, although the examples of use of the charts discussed in this article have been referred to transmission lines, most of them are equally applicable to wave guides. The matching stubs and other impedances that may be connected into a wave-guide system may have an entirely different physical form from lines, but the calculations of impedance and admittance are performed in the same way, the necessary physical measurements being made in terms of the standing waves of electric or magnetic field intensity in the wave guide.

REFERENCES

1. Transmission Lines, Antennas, and Wave Guides (book), **R. W. P. King, H. R. Mimno, A. H. Wing.** McGraw-Hill Book Company, New York, N. Y., 1945.

2. Transmission Line Calculator, **P. H. Smith.** *Electronics* (New York, N. Y.), volume 12, number 1, 1939, page 29.

3. An Improved Transmission Line Calculator, **P. H. Smith.** *Electronics* (New York, N. Y.), volume 17, number 1, 1944, page 130.

4. Communication Engineering (book), **W. L. Everitt.** McGraw-Hill Book Company. New York, N. Y., 1937. Pages 134–6.

5. Reference 4. Pages 174–7.

Characteristics of 2-Phase Servomotors

R. J. W. KOOPMAN
MEMBER AIEE

IN THE past few years, small 2-phase induction motors have become quite popular for use as servomotors in control systems where relatively small torques are required.

Fundamentally, these motors are similar to the 2-phase squirrel-cage induction motor. However, there are important differences in operating conditions and in design values. Two-phase servomotors are operated practically always on unbalanced terminal voltage for, to achieve control of torque, speed, and sense of rotation, the control-winding voltage may be varied from rated value in one sense through zero to rated value in the opposite sense, while the voltage on the other winding, called the main winding, is held constant.

With respect to design values, the air gap is relatively large, and in order to secure stable control, the speed-versus-torque curve must cross the zero speed axis with negative slope. These conditions mean relatively high exciting susceptance and rotor resistance.

An analysis of the performance of 2-phase induction motors as servomotors yields the following:

$$V_{M1}=\frac{V_M}{2}(1+k) \qquad (1)$$

$$V_{M2}=\frac{V_M}{2}(1-k) \qquad (2)$$

where

V_M = voltage applied to main winding
V_{M1} = the positive-sequence component of main-winding voltage
V_{M2} = the negative-sequence component of main-winding voltage
k = ratio main-winding voltage to control-winding voltage

Positive- and negative-sequence torques are respectively

$$T_1=\left(\frac{V_{M1}}{V_M}\right)^2 T_{B1} \qquad (3)$$

$$T_2=\left(\frac{V_{M2}}{V_M}\right) T_{B2} \qquad (4)$$

$$T=T_1-T_2 \qquad (5)$$

where

T_{B1} is the torque due to balanced voltage, V_M, at slip S

T_{B2} is the torque for slip 2-S

T is the net torque

A family of calculated speed-torque curves for a servomotor having typical constants is shown in Figure 1. Curve F corresponds to operation on balanced voltage and is calculated by methods quite generally used. The other curves can be obtained easily by calculating the component voltages from equations 1 and 2, reading T_{B1} and T_{B2} from curve F, and substituting into equations 3, 4, and 5.

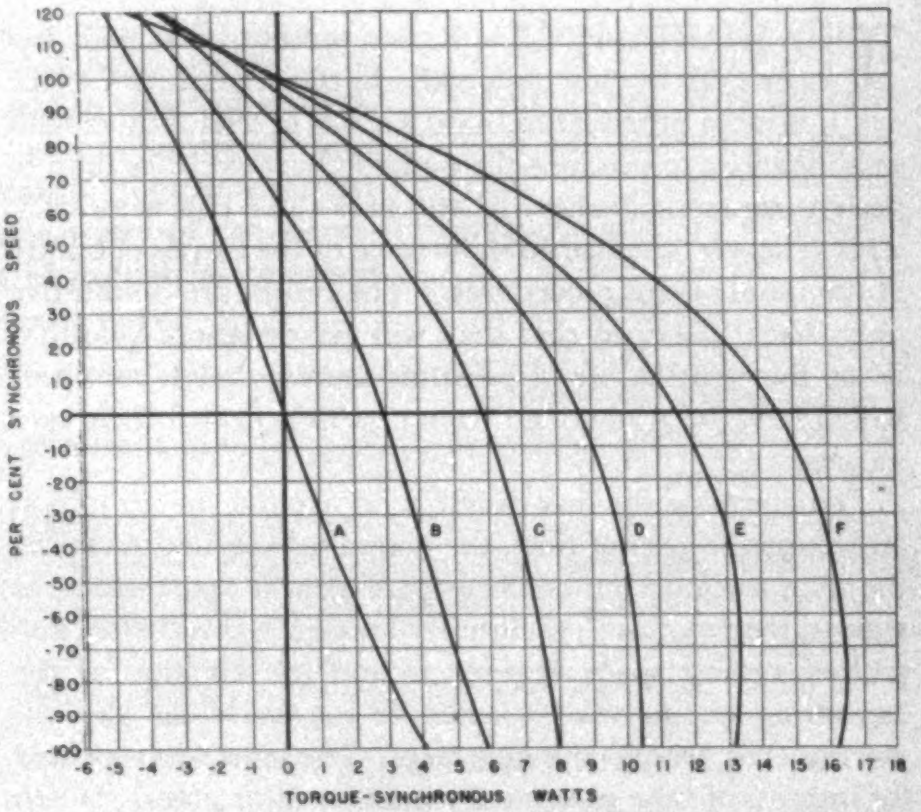

Figure 1. Per cent synchronous speed versus torque in synchronous watts for servomotor operating with external impedance in control-winding circuit equal to zero

Curve A is for control voltage corresponding to $k=0$; B, $k=0.2$; C, $k=0.4$; D, $k=0.6$; E, $k=0.8$; F, $k=1.0$

When the control winding is supplied through a resistance, the formulas for the components of voltage become considerably more complicated. However, if the control voltage is increased to compensate for the external impedance drop, the shapes of the curves over the normal operating range are quite similar.

In the design and analysis of control systems, it is important to know the relation between servomotor control voltage and torque. Information contained in Figure 1 may be replotted to show that this relationship is very nearly linear over normal operating speed ranges. It can be shown to be exactly linear at zero speed from theory.

Another important factor in control system design is the internal motor damping factor which is the negative reciprocal of the slopes of the curves of Figure 1. These factors vary widely with voltage and speed.

If the control-winding voltage is made zero it can be seen from equations 1 and 2 that the positive- and negative-sequence voltages will be equal. If the motor has a speed-torque curve typical of high rotor resistance crossing the zero speed axis with negative slope as shown by T_{B1} and its continuation, T_{B2}, in Figure 1, it can be seen that the negative-sequence torque will be larger than the positive, and thus prevent rotation regardless of the rotor speed.

Digest of paper 49–81, "Operating Characteristics of 2-Phase Servomotors," recommended by the AIEE Rotating Machinery Committee and the AIEE Joint Subcommittee on Servomechanisms, and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31-February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

R. J. W. Koopman is professor, Washington University, St. Louis, Mo.

The Flux Field in the Shaded-Pole Motor

E. E. KIMBERLY
MEMBER AIEE

THE SHADED-POLE induction motor traditionally has been built but not designed. In the present state of the art, it is more practical to build a series of trial motors with modifications to produce the desired characteristics than to design one meticulously and still miss those characteristics. This article is intended to show some of the causes of failure of the usual design procedures. The results are qualitative only, but it is hoped that they will aid designers quantitatively through the use of presently known design constants which have been obtained from experience with their own motors.

To determine the flux distribution around the air gap at any chosen instant of time, the magnitude of flux shown by the time trace on the oscilloscope screen at that instant, as seen on the repetitive synchronized traces, was recorded and plotted against space degrees around the air gap, as the measuring circuit was switched to successive air gap exploring coils around the pole face. The same was repeated for instants of time successively later by 30 degrees. When the shading-coil circuit was open, the space waves plotted for 30-degree time intervals showed standing waves of both fundamental and third harmonic flux.

If the fundamental field traveled around the air gap at synchronous speed, the double revolving field theory could account for its nonconstant magnitude. However, observations and analyses show that the field varies from point to point in time around the air gap, not only in magnitude but in speed as well. In the special motor built in large size and tested, the fundamental field traveled at more than $2^1/_2$ times synchronous speed around some portions of the air gap and, of course, at much less than synchronous speed around other portions. In this article, the position of the fundamental field is plotted against time to show its abberation from the ideal. Figure 1 shows a plot of apparent velocity and magnitude of the fundamental field as it travels once around the air gap. This plot is not completely satisfying because of the few calculated points available for plotting. This erratic magnitude and velocity leads to difficulties in attempting to apply the usual rotating field theory.



Figure 1. Speed and flux density of fundamental field with rotor blocked

Shading coil resistance slightly higher than normal

An analysis of the third-harmonic field (no higher investigated) shows some conditions under which the field is a standing wave and others in which it is moving forward or backward. With the shading coil resistance adjusted for maximum torque, the third harmonic field moves forward at one-third synchronous speed and contributes to the starting torque. When the shading coil resistance is too low, the third harmonic field moves backward and detracts from the starting torque.



Figure 2. Speed-torque characteristics of motor

A—With shading coils open
B—With shading coil resistance same as in Figure 1

It is believed that the function of the magnetic bridge between adjacent poles has been clarified. Its purpose is to improve the permeance of the path taken by the flux, which is mutual to the exciting coil and the shading coil. It also serves to divert this mutual flux from a path through the rotor where it is a detriment to the starting torque because of the small time angle by which it lags the flux through the unshaded portion of the pole.

The effect of too little resistance in the shading coils is shown by loss of starting torque. The flux produced by the shading coil ampere-turns is shown to be confined to a local path which crosses the air gap twice. Those fluxes then do not "join hands" from coil to coil around the air gap. No attempt has been made to correlate the shading coil current and resistance as they are related to heating of the coil or efficiency of the motor. Figure 2 shows the speed-torque characteristics of the experimental motor with and without shading coils.

Digest of paper 49-72, "The Field Fluxes of the Shaded-Pole Motor," recommended by the AIEE Rotating Machinery Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

E. E. Kimberly is with The Ohio State University, Columbus, Ohio.

Industrial Exploration and Development

J. F. DOWNIE SMITH

Research, today, is a complicated process, entailing the services of an entire series of specialists. Assuming that a given company can justify the cost of a research department, the author goes on to examine some of the shortcomings and possibilities of industrial research and development work.

IT IS REALIZED that there is a widespread misunderstanding, or shall we say misuse, of the word "research" and so this article has been entitled "Industrial Exploration and Development," rather than "Industrial Research and Development," which is more common in the mechanical engineering field. What is research to one man is distinctly development to another, and at times it is difficult to lay down rules regarding a proper line of demarcation. This article deals with the operation of a division of a company which ordinarily might be named Research and Development in mechanical engineering, and will cover the product and the personnel.

While the author's experience has been largely in the mechanical engineering field, the procedures involved are about the same for most of the other industrial engineering companies, although in some electrical companies the division might be listed almost entirely in the development field.

SHOULD THERE BE A RESEARCH DEPARTMENT?

Can the company justify a research organization? In general, research these days involves the use of more experience than one man ordinarily could be expected to have. Thus, in each research organization of any size a whole series of specialists has been developed, each man to handle all of the problems in his field in the entire organization. For example, in one organization there is a specialist in gears and mechanisms, another in hydraulics, a third in electric control equipment, a fourth in motion-time analysis, a fifth in metallurgical engineering, a sixth in cam mechanisms, a seventh in testing techniques. Because of the ramifications in the development of a fairly complicated machine, it is seldom desirable for a company to set up a research organization unless it is prepared to spend more than $100,000 a year for research and development. Where the company is small or such an outlay is undesirable, it is generally better for that company to have its research done elsewhere, at one of the industrial foundations such as Battelle Memorial Institute or Armour Research Foundation, or at a technical college such as Iowa State College where it can be handled as a project. At a research institute or at a technical college, there is generally available on the staff a collection of talent which would not be available in a small research organization in industry. However, several defects in the handling of work in that way are obvious to one who has come from an industrial organization. In industry a close check is kept on all projects to ascertain that the research worker does not stray from the primary objective along an alley that looks promising to him at that time, while in colleges there is sometimes such a tendency, and thus proper direction of the work has to be assured.

Assuming that the cost can be warranted, what would be some of the pitfalls of such a department? The ones I shall discuss are connected with the mechanical industries, but would apply to electrical engineers also.

BUSINESS VIEWPOINTS

As the principal object of research in most industrial concerns is the development of some new product or process, a constant check has to be kept, not only on the technical aspects, but also on the business aspects. For example, if a process can be developed by research which indicates that a certain thing can be done, but a business analysis shows that even if it were done it would not be feasible, there is little point in continuing the research much further. This type of control is responsible for a large part of the dissatisfaction of research workers. When a research man is in the middle of a problem and believes that he has made rapid progress, he hates to be stopped from further work, and so feels that any businessman who stops him for business reasons does so because he does not have a scientific appreciation of the problem. Very often this is true and the decision to stop certain problems and continue with others is the wrong one. On the other hand, the businessman makes such decisions on the basis of what the engineers and scientists have convinced him are the possibilities. If the research man is incapable of presenting a clear picture of the possibilities, it is not at all surprising that the businessman frequently turns him down. We all know of instances where a second-rate idea has been pushed through successfully, whereas a first-rate idea has been largely neglected, because of the superior selling power of the man on the first job.

A research department must demonstrate to the company that in the long run it is worth its cost. Frequently the management of a research organization is too impatient to wait for results from research, and these almost invariably take longer than the layman would expect, but no company can justify a layout for research year after year if no returns from that research are coming in or are expected within a reasonable time. If such a research organization does

---

Full text of an address, "Industrial Research and Development," presented at the AIEE Great Lakes District Meeting, Des Moines, Iowa, April 1-3, 1948.

J. F. Downie Smith is Dean of Engineering, Iowa State College, Ames, Iowa.

exist, it is clear that the research management is in danger of being displaced by more competent research management. This means that the skillful research administrator or executive should try at an early stage to show where his research is benefiting the company. In the process of doing so, however, he should not make the mistake of assuming that all the progress made by the company is made by the research department. For example, in the working out of a new product, the research division should consult with the various other departments which will be concerned with the finished product before production begins—the sales staff, tool and production engineers, shop foremen, and so forth. Where those people have contributed to the finished product, credit should be given to them. This helps to smooth the way in the developing of new products. Indeed, from the standpoint of the research administrator, it very often pays to give the production men more credit than they really deserve. In many instances a research organization has to do a selling job as well as research, and a little bit of overpraise of others who have contributed might be worth a great deal in the developing of a research division.

The development of a new product is not something which can be analyzed entirely from the business standpoint. For example, several years ago one of the big aluminum companies in the country was approached to see if it would make an aluminum tank car to handle the special products of one small manufacturer. The aluminum company had its business research man analyze the potential field for tank cars to handle that particular product and, finding that only one or two such cars would be necessary for the whole country, refused the assignment. The small manufacturer then went to a job shop and asked them if they could make such a car, and if they would be willing to do so. Their chief engineer replied, "Why, certainly we can make it," and without giving it any business analysis, he made one. The car traveled the railroads and interested many people as a solution to some of their own problems, and before long a sizable order was placed for such aluminum tank cars. This is not a plea for less business control of research, but an indication that business control has to be guided properly for it to be completely satisfactory.

After a product has been developed, it has to be sold or leased, and so the company might be expected to go into large-scale production immediately. It may be argued that this is what is done in the mass production industries. Actually, however, it is not. A glance at the progress in the automobile industry since its beginning will show that no great change has been initiated in any one year by any major company without serious danger that the public would not accept the product. The development of the Chrysler Airflow, which was actually a very distinct engineering achievement, was too advanced for the average buyer at that time, but the engineering advances in that car since have been adopted by almost every automobile manufacturer in the United States. Thus if a radical improvement in a product is to be expected, it might be better to put out such a device in engineering in the same way that a pilot plant is developed in the chemical engineering industries before a full-scale production plant is built. In the machine tool industry, for instance, this might mean manufacturing a limited quantity of such items for local sale before inaugurating large-scale production. Frequently the cost of the final product would be more than if full-scale production had been started immediately, but this might be good insurance.

THE BUSINESS MANAGEMENT OF ENGINEERING

Business management has a constant finger in the research pie. The cost of each phase of the business is, in general, of little interest to the research man, and someone has to keep him cost-conscious. Frequently, in order to give the businessman, general manager, and the chief engineer or technical director a proper indication of progress, reports are requested from each section head on each of the developments under his control. The time between those reports should not be more than one month, but one week is too short a period. If a section head is asked to prepare a progress report every month on a job where expenses keep rising, after a time, if progress cannot be shown, he will take a more active interest in that particular item and see that progress is made. If progress is delayed in a development department because certain matters are unknown, the problem should be taken from the development department and reassigned to a research department where more latitude can be given in cost matters.

In general, the management of an engineering department is handled by a technical man who probably knows engineering quite well, but whose business training is likely to be slight. For that reason, he often cannot handle *both* engineering and business matters to best advantage. In one company with which the author was associated, the business aspects of engineering assignments were handled by business-trained men reporting to the director of research, thus relieving the engineers, including the chief engineer, of all business responsibilities. For example, if a contract with an outside concern was to be set up for a development project, the chief engineer would be called in to consider the engineering aspects of the program, or if someone else in the organization was better prepared to handle the technical matters, he would be consulted. But the handling of the contract, and the proper following up of this contract with the outside concern, would be done by the business representative. Because this businessman was responsible to the director of research, and not to the chief engineer, there was at times a feeling that the general management was not given the engineering picture as fully as the engineers would like. Nevertheless, on the whole, this system worked very satisfactorily and often was envied by project or chief engineers in other concerns who had to handle all phases dealing with individual contracts.

Research in production items requires a constant watch over costs. For example, in one instance the author believed that an improvement could be made in the sound deadening on automobile doors which would eliminate the filthy section in the plant devoted to the spraying of the tarry material. One of the wide automobile doors was taken off the production line and the proposed change was made. It worked beautifully. Then a cost estimate was made, and it was found that the new scheme would cost 1.12 cents per pair of doors, or per car, more than the original. As a first attempt, it looked encouraging to the author—but the automobile company was not sufficiently interested even to look at it when they saw the price differential.

Research on production items frequently has its humorous side, also. When one of the railroad companies operating out of Chicago wanted to get a sound analysis of one of its trains in an endeavor to cut down on the sound level, the author was assigned the job with some assistants. For comparison purposes a sound analysis also had to be made of a competitive train, and this, of course, posed some problems, for it would have been awkward explaining the reasons for the test. However, everything went smoothly until the last car was reached, and there the conductor was met. He asked the author and his assistant what was going on, and, unabashed the assistant said: "I am taking some graduate work in college, and this is my professor." Considering the fact that he was about 55 years old, and the author about 35, there was some feeling of relief when the conductor believed the story.

Among the results of this research was one item of considerable interest. Inside the car the principal noise was found to come from the vibration of the wheel when it hit something. The frequency of vibration was quite high, and almost continuous, regardless of speed. However, it was discovered that the cure could be effected very simply, so that when the wheel was struck by a hammer it was like hitting a block of wood, whereas the untreated wheel rang like a bell. The general management was very much impressed and insisted that every car from then on must be equipped with that device. Some two years later, the author checked back to find out if many such wheels had been turned out, and discovered that not a single one had been. The railroad men of general management level approved the idea whole heartedly, but the mechanics decided that it would spoil their practice of hitting a wheel with a hammer to detect cracks. They couldn't hear anything. This was one good idea gone wrong.

RESEARCH COSTS

Many large research organizations try to charge the cost of all research and development men to particular jobs or projects. Where there are several specialists, and each man works on perhaps a dozen different projects in a week, it soon becomes a tiresome chore for a research man to break down his time satisfactorily, and the making out of time cards for research workers ordinarily is looked upon as beneath their dignity. Where it is possible at all, it is better to put the research worker on overhead and have the time spent by the various research workers apportioned by the section or department head. This may seem antagonistic to good business practice, but it is remarkable how much animosity can be built up in the minds of research workers by such minor routine and red tape.

GENERAL PERSONNEL RELATIONS

Programs for Advancement. The management of a research organization should have definite plans for advancement of every capable employee, and these plans should be made known, in so far as possible, to the person concerned. It is important that the latter be advised of his shortcomings, as well as of his desirable characteristics, and he should be told what is to be expected in preparation for the next step in the plan. Everyone in the organization should have at least one management representative, not necessarily his immediate superior, who is actively interested in increasing the employee's value to himself and to the company. In research organizations there frequently is not a personnel manager, and there should be if the company is large.

Explaining Company Policy. Too frequently company policy does not go further than the general management and the research worker does not know why he is doing what he is, and why the company is doing what it is. In general, a management policy affecting the workers should be explained to them.

Worker Faults. It does not pay to have a third-rate worker continue to consider himself first-rate merely because he is not told of his deficiencies. It is better to tell such men, so that they have a chance to improve, and to realize what they lack. Otherwise, they think that they are being deliberately held back because of favoritism. If the man still continues to feel as he does after a suitable cooling-off period, an effort should be made to place him in some other department.

Training Programs. There should be a constant training program for younger men to take over the senior executive positions at the proper time. Frequently this is critically neglected.

General Management Visits. To obtain a true picture of the progress being made, members of the general management should not visit the research division on well-advertised days, but often should drop in unannounced. Also, they should make it a point to discuss with the various workers, individually, their problems, their hopes, and expectations. Too often, general management gets its picture of research from the research director, who tends to present a distorted view. This criticism probably is limited to a relatively few concerns, however.

Technical Decisions. It should be clearly understood that technical decisions should be made by the technical staff. Frequently, the research director makes technical decisions, as well as those of a business nature. If he is a competent technical man, this is probably all right. But many a research organization has experienced difficulties when the research director is appointed for his business ability and yet makes technical decisions. Sometimes such a man has just sufficient technical knowledge to be "dangerous."

Titles. Some companies have a definite policy of giving only one or two titles in a research organization, for example, the Director and Assistant Director of Research. This creates a great deal of unnecessary ill will and is actually poor business because the members of the organization have no way of identifying themselves in business correspondence as to their particular affiliation—be it as engineer, or salesman, or perhaps on the business staff. In addition, a title can save the man embarrassment if he attends national conventions. If asked his position, he can identify himself merely by giving his title rather than going into a detailed description of his job.

It has been stated that titles are frequently not given because, if a man is found to be in the wrong position, he can be transferred without loss of title and thus with less hurt to its prestige. The author has seen this process in action and he is convinced that the argument is not valid. The loss of a title is not what hurts the man; it is the loss of the job. In addition, in such cases where titles are not given, there often is a tendency for that corporation to lose men to similar positions where a title is available. Perhaps some vanity is tied up with this factor, but if so, it should be recognized.

In the author's opinion, titles should be given to all men from research director to group leader.

Scholars. Research workers, on the whole, are not quite the wild-eyed radicals pictured in the comics. They are generally a pretty nice group of people and fairly easy to get along with, and they are research men for a very special reason. This is the type of work they like to do and they are competent to do it. It does not follow at all that they are competent to *guide* research when it is done by other people, but they may be brilliant research men when left to themselves.

Thus, clearly the appointment of a man to run a group or section or department should not be based on the individual accomplishments of the man or what he has done for the company, but it should be based on the choice of the proper man to run that particular group of people. It is frequently expected that the group leader would be the highest paid man in the group and the department head the highest paid man in the department. But this is not necessarily so, and actually should not be so. A man working in a department might be far more valuable to the company than the department head. Some advanced research organizations recognize that fact and often the department head is a relatively young man who can run a department, but has not himself achieved distinction in research. On the other hand, research men feel that a title comparable with the department head would be a just reward for their labors, and one or two of the progressive companies are considering this matter very seriously. The Monsanto Chemical Company has a very limited group of men who have achieved distinction in research and who are listed as "senior scholars." The salary limitations of senior scholars are not those of a department head. Indeed, they can make as much money as the company feels they deserve, and some of those men are making very handsome salaries.

Punching of Time Clocks. It goes against the grain of most research men to punch time clocks, and yet it is surprising how many research organizations insist on it, even for department heads or the Assistant Director of Research. Actually, the punching of the clock by the senior men of the staff is merely to show the average worker that there is no discrimination; but although no discrimination is shown in that respect, the punching of the clock itself still is repugnant. This is a minor point, but it may create ill-will.

The Stimulation of Invention. In research there should be some tangible way to stimulate inventiveness or ingenuity. This is extremely difficult, and actually the author knows of no system which is completely satisfactory. We all know of systems which work very well in the production field. For example, if a man in the Lincoln Electric Company shows how to cut production time by a certain amount, he is given a percentage of the saving made by the company. In research, however, it is not so easy. If a certain company is expected to design two machines, the sale of one expected to be 50,000 and the other 500,000, and this fact is known ahead of time, a department head would assign a designer, or engineer, to each project. Clearly, then, if both do an equally good job, the income from the one would be expected to be a great deal more than the income from the other, if a bonus is paid on the basis of company returns. But this would not be fair, because in the first place, if both engineers had been reversed in position, they probably would have done equally well. On the other hand, a bonus paid to the entire staff is also not completely satisfactory because non-contributors reap the profit from those who are contributing.

Because of the difficulty of measuring the real output of creative workers, research management may take the easier course of establishing job classifications with fixed price ranges and other similarly leveling expedients. While this may make for easier management, it certainly does not create maximum effectiveness of the group.

Patent Troubles. There often is friction between designers and others as to who should receive credit for patents. Where engineers work as consultants on such projects, to avoid possible jealousy, they frequently step out of the picture and let the designer take full credit. In some companies, it is mandatory for every man to keep a diary showing clearly what he invented, when he did it, and by whom it was witnessed. The author knows from practical experience that it is almost impossible to get the average engineer to keep such diaries and to put in them what should be there. Where such a conflict does arise between two men who claim priority, it is generally expedient for the department head to leave the decision to the patent attorney. Where the department head makes a decision on priority, he generally makes an enemy, or at least he leaves someone in his department with a feeling that the boss is spreading favoritism. When it has been pointed out to various people that they must keep such records, and they have not done so, and as a result of their negligence, they cannot convince the patent attorney of their claims, they have only themselves to blame.

Staff of Machinists. The number and caliber of the machinists should be adequate to keep the demand for parts moving quickly. Too frequently expensive research men must waste time waiting for parts from the shop. Because the machinists in many research organizations are controlled by the production staff, it is easy for the machine shop foreman to build up a backlog of demands, and thus simplify his scheduling problem for men and machines. But it creates considerable trouble in the research and development department.

Minor Irritations. Certain other items which are very distasteful to the research worker crop up periodically. Most of these are of minor character, but they have a major bearing on morale. The following may be mentioned specifically:

1. Proper parking facilities.
2. The purchase of minor equipment.
3. Proper lighting.
4. The minimizing of noise and vibration.

THE INITIATION OF AN IDEA

An idea may come from almost anywhere. The general management may have learned of the doings of a competitor, or may have analyzed the field and decided to proceed in a general direction. Generally, in such instances, a budget is set up to investigate the situation, and the picture reviewed before the money runs out. The investigation may show the idea mechanically feasible but economically unsound, or vice versa, so that periodic reviews are in order.

More frequently ideas are submitted through a suggestion system, which may, or may not, be formally set up. The author's experience indicates that unless a suggestion system is properly controlled by someone with distinct responsibilities in the organization, the suggestion system probably will not be satisfactory. Too often the suggestion system is controlled by someone without the necessary breadth of vision. In addition, the head of the suggestion system should be able to convince a suggester that his idea is not too good with out antagonizing him seriously and without dampening his spirit to help. Certain suggestion systems are in operation, where, at the receipt of a suggestion, a form letter, individually addressed, signed by the Assistant Director of Research, is sent to the suggester indicating that the idea has been received and will be considered. After due consideration, if the idea is obviously not workable, a second form letter is sent out indicating that at the moment the company does not feel that it ought to go ahead with the idea for one of several reasons, which may be that the company is not particularly interested in that field, or that conditions do not warrant putting a lot of money into it, or some other valid reason. Since there are comparatively few of those valid reasons, the form letter becomes rather stereotyped, and after a man has received a half dozen or a dozen of those, he usually throws up his hands and says, "I'm through. I'm sending in no more suggestions." For the suggestion system to operate satisfactorily, the suggester must be given very considerate treatment, called in to explain his ideas, and have a round-table discussion on the suggestion so that if the proposal is no good he will be able to see why without feeling that he is being given a brush-off. The author has gone through this mill on many an occasion in many companies, and in no case has the suggestion system operated to his complete satisfaction.

Where suggestions are sent in by outsiders, it is common practice to set up a separate agency connected with the general management to handle the correspondence before the engineering department sees it, as a precautionary measure. The agency keeps the patent attorneys properly informed.

In general, in such suggestion systems a variable number of the suggestions, up to as high as 90 per cent, can be disposed of immediately as impractical by men of the caliber of a chief engineer. But, of course, such a man ordinarily would not want to spend a large part of his time going over routine suggestions. Therein lies one of the weaknesses, for management may have to go down the line quite a distance to find a man who is willing to do the job, and this man may be nothing more than a glorified clerk. Such men ruin the suggestion system. Thus, the author believes that for a suggestion system to work satisfactorily the suggestions must be examined by a man of some breadth with sound engineering training and with the ability to explain to the suggester that his idea is not acceptable and still have a friend. In some companies a different approach has been adopted with the suggestion system headed by a personnel man who has most of the attributes but not the engineering qualifications; he obtains an engineering analysis from the engineering department when one is called for. As a large part of the suggestions are of a nonengineering type, even in engineering organizations, this might work out satisfactorily.

BALANCING RESEARCH PROGRESS WITH DEVELOPMENT

Where research and development are conducted under the one head, as is frequently the case, an aggressive management may put the development department in a tight spot by weighing progress on a research model and immediately expecting that the development would be simple. The author knows of more than one case where, on the basis of an incomplete research apparatus, the management sold the finished article in quantities before the development department even had considered the subject. Because of the time elements involved and the promise of delivery on a certain date, the development department had an extremely difficult time getting the things done. This, of course, is one way of putting the development department on its mettle, but it is also somewhat questionable.

CHECKING DEPARTMENT

In many progressive organizations today, because of the lack of training in the shop ordinarily acquired by the young machine designer, it is growing more common to have another department set up to check the drawings prepared by the development department and to change them, where necessary, to meet the particular possibilities for that factory, and to simplify, where possible, or to reduce production costs. This particular department ordinarily would be made up largely of men with extensive shop experience and a strong practical viewpoint. They also must be in close touch with the production departments and thus are halfway between development and production. There is a tendency in such a department for men to change designs largely on the basis of their own whims because they feel that a particular design of theirs would be cheaper than that proposed by the previous designer. This type of practice should be discouraged because, in many instances, the original designer knew what he was doing.

In summary, it may be said that many typical defects in research and development organizations have been brought out in the open, with occasional suggestions for solutions.

If a responsive chord has been struck in the minds of any of those reading this article, then it will have served a useful purpose.

A 3,000-Horsepower Gas Turbine Power Plant

J. S. HAVERSTICK
ASSOCIATE AIEE

THE 3,000-horsepower gas turbine power plant described herein has a turbine which is divided into two parts: one drives the compressor and the second drives the load.

The components of the plant are a 3-stage mixed-flow compressor having a pressure ratio of 6 to 1, a 5-stage axial-flow turbine to drive the compressor, and a 3-stage axial-flow turbine to drive the load. Six combustors are located between the compressor and the compressor driving turbine. These components are all arranged along a common axis, and a by-pass is provided around the power turbine in order that the gas-generating portion of the plant may be in operation while the power turbine is at a standstill.

The cycle on which the plant operates is the open cycle, series flow without intercooling, regeneration or reheat, and has design point conditions of 68 degrees Fahrenheit, 14.7 pounds per square inch absolute, inlet air to the compressor, and 1,300 degrees Fahrenheit inlet temperature to the compressor driving turbine.

A complete set of auxiliaries is provided for the plant and includes a main and auxiliary lubricating oil pump, a fuel oil pump, an overspeed trip, a speed governor, a low lubricating oil pressure trip, a tachometer, and free wheeling clutches for the starting drive and turning motor. The auxiliary lubricating oil pump is driven by the turning motor.

A composite plot of the performance is presented in Figure 1 in which the variables are output, fuel consumption, power turbine speed, compressor and compressor turbine speed, and compressor turbine inlet temperature. The plot is made for the design ambient air conditions of 68 degrees Fahrenheit and 14.7 pounds per square inch absolute as well as for fuel oil having a H.H.V. of 18,500 Btu per pound and the modifying factors are given for correcting actual operating conditions to these standard conditions. Corrections are given as factors of each variable.

Figures 2 and 3 indicate the speeds and temperatures during idling operation and the turbine-inlet temperature drop versus compressor-set speed.

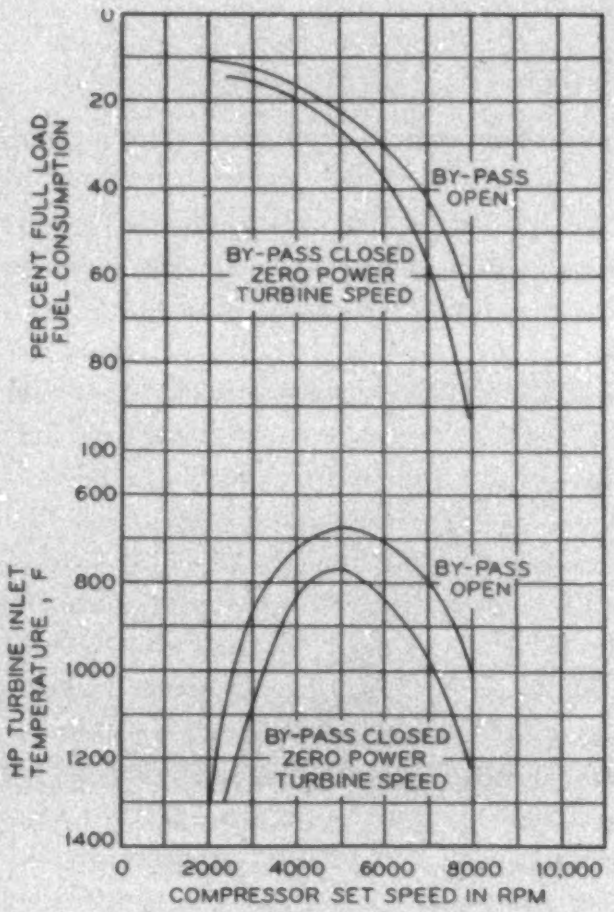

Figure 2. Idling conditions with open and closed by-pass



Figure 3. Turbine-inlet temperature drop versus compressor speed from fully closed to fully open by-pass

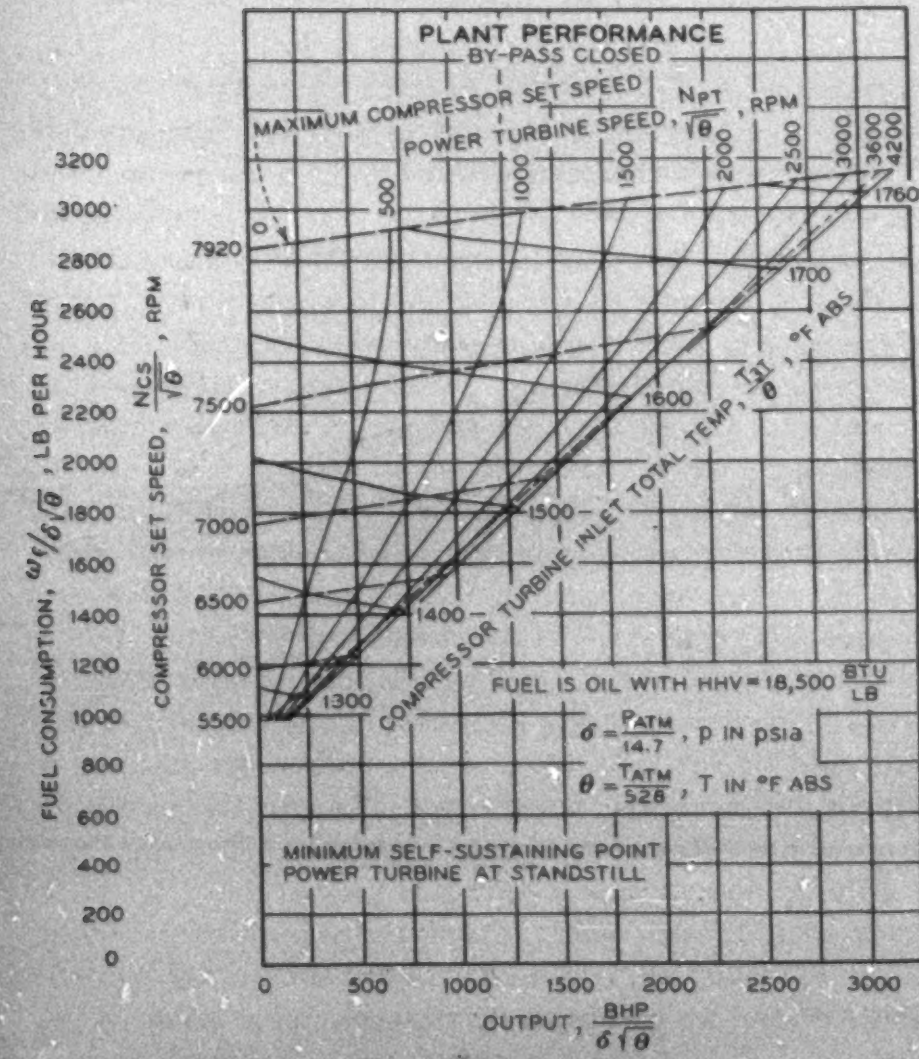

Figure 1. Performance of power plant

Digest of paper 49-113, "A 3,000-Horsepower Gas Turbine Power Plant," recommended by the AIEE Power Generation Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

J. S. Haverstick is with the De Laval Steam Turbine Company, Trenton, N. J.

Electrostatic Air Cleaning in the Textile Industry

C. H. McWHIRTER R. P. POSEY
ASSOCIATE AIEE

DUST COSTS industry billions of dollars annually in spoilage, maintenance, and cleaning bills. Few industries are more familiar with this fact than the textile industry, where spoilage caused by dirt long has been recognized as a major problem.

Figure 1 illustrates graphically the dust particles that abound in the air about us. The larger particles slowly settle or can be removed by mechanical filter systems, but the smaller particles, which are responsible for much damage and human discomfort, were, until comparatively recently, almost impossible to remove. The development of the electrostatic air cleaner, however, has made possible standards of industrial cleanliness heretofore impossible to achieve economically. Experience has shown that substantial monetary savings almost invariably follow the installation of electrostatic air cleaners in textile plants.

DEVELOPMENT OF AIR CLEANERS

The effect of electrostatic fields on smoke particles in air was first observed in 1824. In 1884, Sir Oliver Lodge used electrostatic precipitation in the solution of a lead smelting problem. The first practical installation was made by Dr. Cottrell in 1906. The Cottrell precipitator since has been used extensively in the precipitation of particles from flue gases. Many practical modifications of this precipitator have been designed and marketed.

With a cleaning efficiency of 90 per cent or better, electrostatic air cleaners have reduced spoilage in textile manufacturing to such an extent that they quickly pay for themselves. Besides giving history, operation, and application data, this article points out the health benefits and lint-collecting problems of textile installations.

Not until 1933 was a practical electrostatic precipitator designed in which ozone generation was low enough to permit its use in ventilating systems supplying air for human consumption. This new precipitator was developed at the Westinghouse Research Laboratories.

Westinghouse proved that electrostatic precipitation could remove microscopic air-borne particles which could not possibly be removed by any conventional mechanical filters.

Electrostatic precipitators place an electric charge on air-borne particles, then deposit them on an oppositely charged surface. See Figure 2 for a diagrammatic illustration of this action. While the Cottrell-type precipitator requires 30,000 to 100,000 volts for proper operation, the Westinghouse precipitator places a charge on the air-borne particles in a chamber which is independent from that which collects the particles. By using this 2-stage principle, precipitators requiring a maximum of 13,000 volts have been made possible.

PRECIPITRON COMPONENTS AND OPERATION

The electrostatic precipitator developed by Westinghouse and sold under the trade name of Precipitron, the electronic air cleaner, consists of three essential elements: ionizer, collector cell, and power pack. The ionizer, probably the most important of these elements, places a positive electric charge on air-borne particles without the creation of excess ozone. It consists of tiny parallel tungsten wires spaced in line with parallel tubes at ground potential. A high positive direct voltage on the ionizer wires causes the space between the wires and the rods to become saturated with free positive ions. Particles pick up a surface positive charge as they are blown through this ionized space. After passing through the ionizer section, the air flows between oppositely charged plates in an electrostatic chamber, where the dirt particles are deposited on the negatively charged plates. There they remain until the plates are washed.

The collector section is made up of metal plates parallel to the air flow, the spacing between plates being approximately 5/16 of an inch. Alternate plates are charged at 6,000 direct volts.

The third essential element is the power pack. The most economical power pack so far developed is a modification of the standard voltage-doubling electronic circuit. Two voltage leads are brought out, one supplying 13,000 direct volts for the ionizer section, the other supplying 6,000 direct volts for the collector section. The wattage dissipation is small, being approximately 15 watts per 1,000 cubic feet per minute.

Electrostatic air cleaners of this type are approved by the Underwriters Laboratories, Inc., from the standpoint of both electrical shock and fire hazards, when they have been installed and operated according to the manufacturer's recommendations.

Dirt deposited in the collector cell plates must be removed

Full text of a District paper presented at the AIEE Southern District Meeting, Birmingham, Ala., November 3–5, 1948. Also presented at the AIEE Conference on Electrical Engineering Problems in the Textile Industry, Georgia Institute of Technology, Atlanta, Ga., May 27–28, 1949.

C. H. McWhirter was Precipitron Engineer, and R. P. Posey was Industrial Engineer, both with Westinghouse Electric Corporation, Atlanta, Ga., at the time this paper was written. Mr. McWhirter is now Assistant Sales Manager, Anderson Brass Company, Birmingham, Ala.

at regular intervals, usually of three to six weeks duration. The simplest and most economical method of dirt removal yet devised consists of merely spraying the collector cell with water which washes the dirt down the drain.

For small installations, the most economical method of removing this dirt is to hose the cell and ionizer by hand. One operator can hose down a 1,000-cubic-feet-per-minute section in approximately ten minutes.

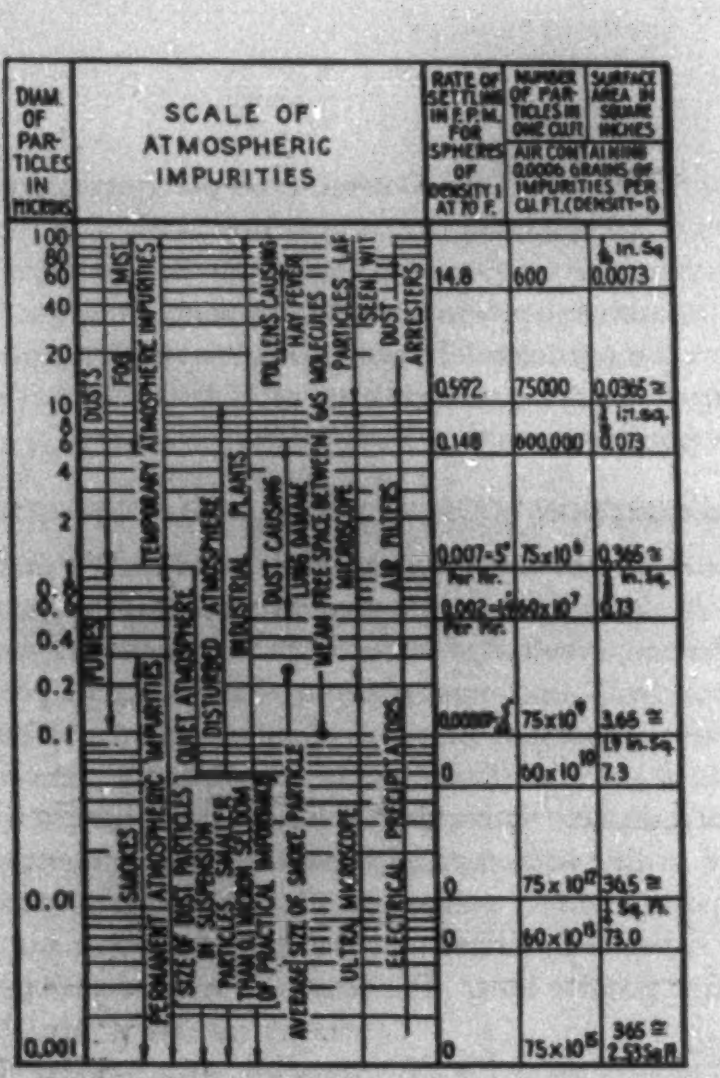

Figure 1. Rate of fall, size, and distribution of air-borne particles

Compiled from Stokes Law

After the collector cells and ionizers have been washed free of dirt, an adhesive is sprayed on which makes it possible for the cell to hold much larger quantities of dirt between washings. The latest development in adhesives is fireproof and nonoxidizing. It may be sprayed on immediately after washing, allowing the unit to be placed back in service in a minimum of time.

For larger installations of 40,000 cubic feet per minute or more, automatic washers and adhesive applicators have been found to be economical. These washers are constructed in such a way that a column of cells can be sealed off, washed, and adhesive applied while the remainder of the cells are in operation.

TESTING ELECTROSTATIC AIR CLEANERS

The introduction of electrostatic air cleaners rendered obsolete accepted test methods conducted on a weight basis. These tests were on artificial dust arrangement, whereas cleaning devices usually are installed to clean normal atmosphere air. A blackness or discoloration test, developed by Westinghouse Research Laboratory engineers with refinements by the National Bureau of Standards, provides greater accuracy, approximates an active particle count, and is made without the addition of artificial dust. Enough air is drawn through sampling tubes from the dirty and clean air sides of the air cleaner to form equal discolorations on filter papers. By comparing the volumes of air, an index is found which gives the efficiency of the cleaner. Electrostatic air cleaners can give an efficiency of 90 per cent or better by such a test, whereas the best mechanical-type filters will give only 10 to 20 per cent efficiency when subjected to the same test. This difference is shown in Figure 3.

TEXTILE PLANT APPLICATIONS

Electrostatic air-cleaner components are manufactured in standard sizes which may be combined to form units of any desired size and air handling capacity.

Electrostatic air cleaners in textile plants can be justified on the basis of improved product quality, reduced maintenance costs, and improved comfort and health conditions. They usually are installed in one or more of three general types of systems:

1. Central systems, which supply entire sections of the plant with air, cleaned and otherwise conditioned in line with plant process requirements. Such an installation is diagrammed in Figure 4.
2. Numbers of small individual forced-air systems frequently are installed in a single large room. Each individual system usually consists of a large ceiling-mounted duct with electrostatic air cleaner, as shown in Figures 5 and 6.
3. Forced-air systems for the drying of yarn require air that is extremely clean. This is particularly true in those installations where air is forced through the yarn packages. Electrostatic air cleaners offer the best and in many cases the only available means of insuring clean air for such applications.

Electrostatically cleaned air is particularly justified for those areas of a textile plant in which the operations of throwing, spinning, and twisting are performed. Each



Figure 2. Diagram of electrostatic air cleaner

A foreign particle passing through the field at the left receives a positive surface charge. Carried into the plate assembly at the right, it is drawn out of the air stream to a plate of opposite polarity of these operations involves high-velocity motion of yarn through air, generating high static charges which attract atmospheric dirt particles. These are mostly carbon particles which are twisted into yarn, causing permanent discoloration. In addition both yarn and filament breakages cause loose ends to be thrown about at high velocity, attracting microscopic dirt particles. This results in sections of yarn of greater than average grayness. Only the removal of atmospheric dust, and oil mist as generated by the rapidly moving spindles, by electrostatic air cleaning can reduce effectively such inclusion of dirt within the yarn.



Figure 3. Filter paper through which 10,000 cubic feet of (left to right) uncleaned air, mechanically cleaned air, and electrostatically cleaned air was passed in blackness test

To insure a high quality of finished product, many mills have found that electrostatically cleaned air is necessary in virtually all operations. Contact of the yarn or cloth with contaminated surfaces produces dirt smears which may be difficult or impossible to remove, resulting in an inferior product.

For example, in 1942 a certain southern textile mill produced 1,000,000 yards of rayon-filled crepe, satin, and voile per month with a spoilage of 168,000 yards per month. Upon installation of electrostatic air cleaners, the maximum spoilage dropped to 50,600 yards per month, an increase of 14 per cent in top quality production. The cost of electrostatic cleaners can be amortized quickly under such conditions.

The drying of yarn frequently involves the direct passage of heated air through the yarn package. The package itself acts as a filter; any dirt which may be in this air is retained by the yarn. Consequently, all possible dirt particles must be removed from the process air. The electrostatic air cleaner is the most effective device yet found for such an application, since it will remove atmospheric particles of a size impossible to remove commercially by other means.

An application similar to the package drying described in the foregoing is that in which skeins or packages of yarn are placed in an enclosure through which hot dry air is circulated. Again, dirt may be deposited upon the yarn, causing an inferior product. Cleaning of process air usually is required.

In all of the afore-mentioned applications it should be remembered that the quality desired in the final product is the controlling factor. For example, in materials which will be dyed a dark color there is little point in going to extremes of cleanliness. Only an examination of each material, textile plant, and the losses due to dirt incurred therein, will determine the extent to which the removal of atmospheric dirt particles and the accompanying costs can be justified.

In order to obtain best results, both make-up air and recirculated air should be cleaned. Large quantities of dirt are brought into the mill on the operator's clothing and shoes, hand trucks, and so forth. In addition, high-speed machines usually throw off an oil mist which contaminates the surrounding air. Only cleaning of the recirculated air can remove such contamination. An examination of the conditions and product should be made to determine whether or not it is justifiable to clean all or only the make-up air in any given installation.

To prevent infiltration of contaminated air, a positive static pressure should be maintained by sealing the room

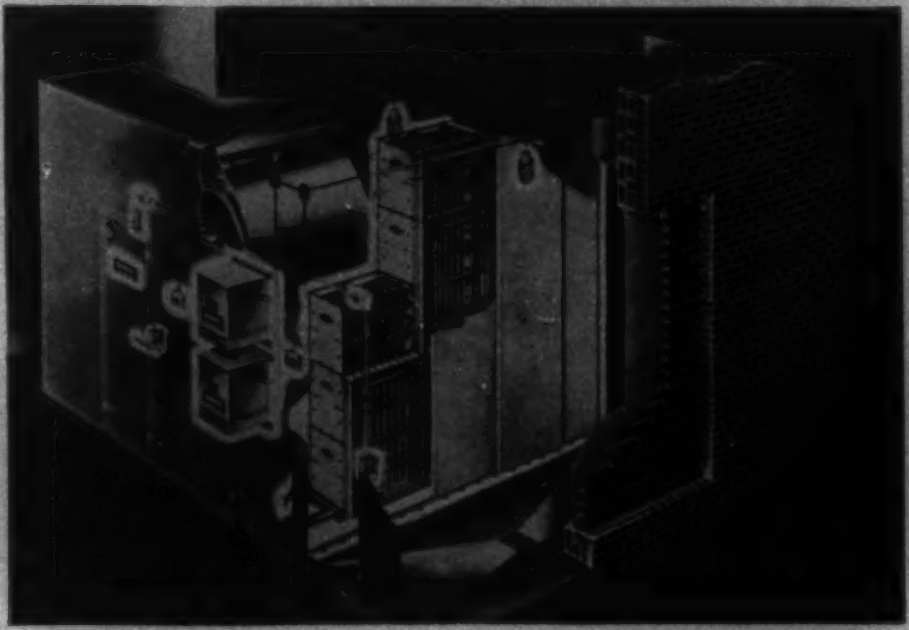

Figure 4. Cutaway view of large electrostatic air cleaner installation showing basic components

Figure 5. Electrostatic air cleaner installed in an individual self-contained forced air system

Several such systems may be installed in one large mill area, as shown in Figure 6

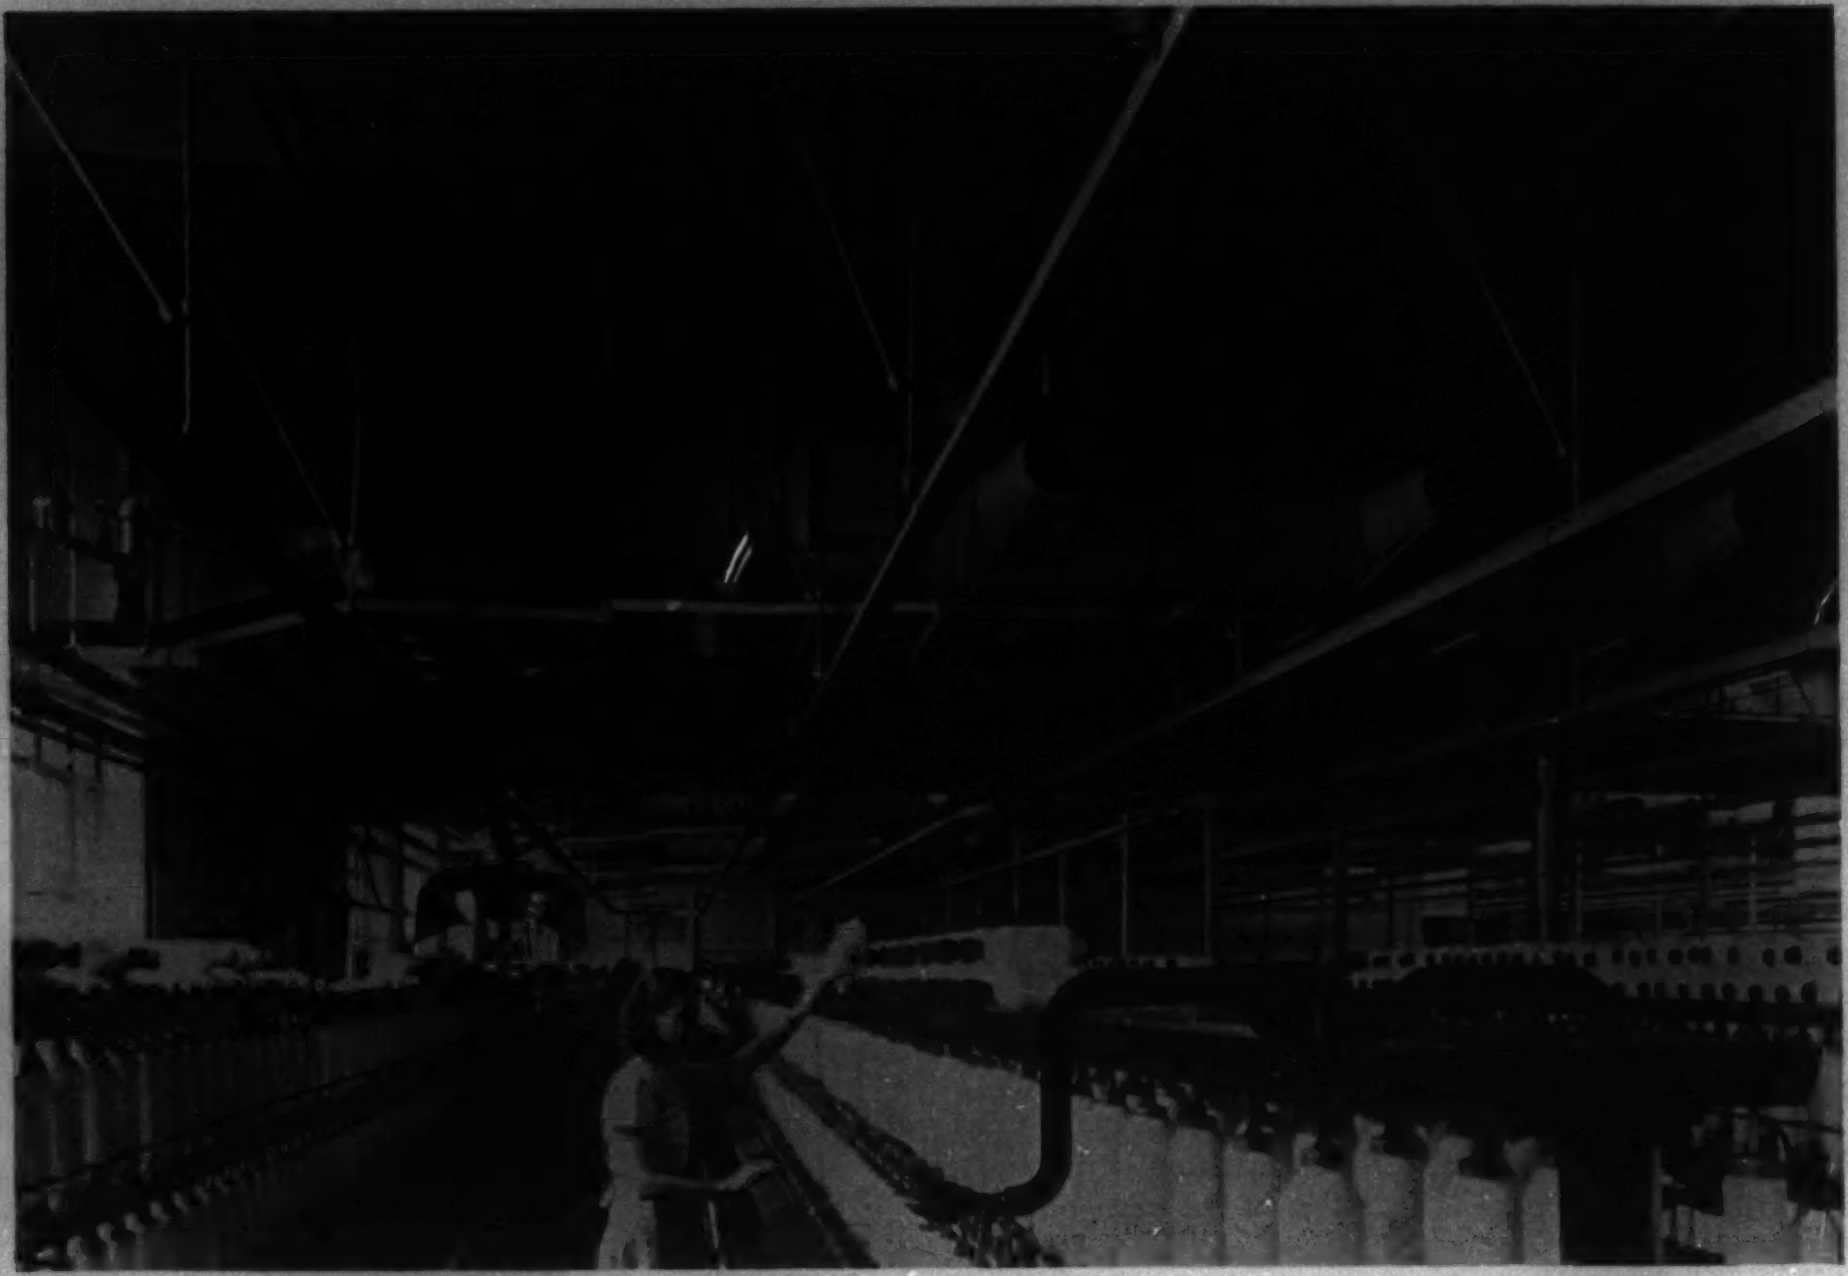

Figure 6. Ceiling mounted ductwork of individual air systems; each duct is a self-contained unit

and allowing the excess air to escape from the room through relief dampers.

REMOVAL OF LINT

The most important problem in textile applications is that of lint, particularly in cotton and woolen mills. Unfortunately, electrostatic air cleaners are not designed for lint removal, as the filaments tend to align themselves perpendicular to the charged plates and as a result may cause intermittent electrical breakdown and arcing between the plates.

This increased arc-over rate reduces the efficiency of operation; and where an extreme arc-over rate is encountered, damage to the equipment may result. Therefore, it is essential to remove lint from the air prior to electrostatic cleaning. For this purpose, a 16- to 20-mesh screen has been found to offer an effective solution. A mat of lint will collect on such a screen and must be removed at frequent intervals in order to prevent blocking of the air flow.

However, since this mat of lint will roll into cylinders with a sweeping motion of a broom or brush, its removal from the screen is not a difficult or lengthy process. Arc-over rates can be reduced by as much as 10 to 50 times merely by the use of a screen ahead of the electrostatic cleaner. It should be noted, however, that arc-overs usually cannot be eliminated completely. An average rate of one arc-over every two minutes is not excessive for the usual large installation.

An air washer through which air must pass before entering the electrostatic air cleaner provides another method for the removal of lint, since the water sprays in such a washer effectively trap the lint. However, great care must be used to prevent the entrance of entrained water droplets into the electrostatic air cleaner. Such droplets will cause excessive arcing, corrosion, ionizing-wire breakage, and other damage.

CLEANER AIR, HEALTHIER WORKERS

Electrostatic air cleaners usually are considered only for the improvement in product quality. However, there is another feature of these cleaners which is not often recognized. This is the reduction of air-borne bacteria and spores which attach themselves to tiny dirt particles as a means of locomotion and existence. These air-borne organisms are removed along with the dirt particles, with consequent reduction in diseases and certain respiratory infections.

A reduction in man-hours lost because of sickness is always reflected directly in plant efficiency, offering additional justification for the installation of electrostatic air cleaners in textile plants.

Vibrating Reed Selectors for Mobile Radio Use

A. C. KELLER
ASSOCIATE AIEE

L. G. BOSTWICK

A new type of signaling system[1] has been developed for mobile radiotelephone service in the Bell System. The basic selection of this system is performed by the use of vibrating reed selectors as described in this article.

Description of Selectors. The vibrating reed selector has magnetic reeds attached to a block to form a small tuning fork, the tines of which are about an inch in length. A polepiece attached to a small magnet is positioned centrally between the ends of the tines. Vibration of the tines takes place when the surrounding coil is energized with the proper voltage and frequency. Two types are used in the mobile radio signaling system; the first as shown in Figure 1 is provided with a contact and is used in the mobile station in groups of four. The other type of selector is similar except that the contact is omitted and this type is used at the fixed station to provide filter characteristics.

The group of four selectors used in the mobile station is operated by a common coil surrounding the four selectors. The selectors in the group are each provided with a plug-type base such that they can be changed as needed. The four selectors operating simultaneously, each of a different frequency, determine the mobile station number.

For common carrier mobile telephone service, it appeared necessary to be able to select any one of 10,000 stations. Such a large number of selections can be achieved in various ways including a combination of 32 frequencies taken four at a time. The 32 frequencies used are all contained in the range from about 350 to 850 cycles.

Performance Characteristics of Mobile Radio Selectors. The suitability of the selectors depends primarily upon their sensitivity at their nominal frequencies, upon their selectivity or discrimination against other frequencies, upon their operate times, and upon their stability with temperature and time. The first three of these factors in turn depend upon the sharpness of tuning or the Q of the vibrating system.

A Q range was chosen to give a constant bandwidth $\left(\text{bandwidth} = \frac{\text{resonance frequency}}{Q}\right)$ of 1.2 cycles for the selectors throughout the frequency range. This requires that the Q vary directly with frequency from about 300 at the lowest frequency to about 670 at the highest. An operate time always under 0.5 second results from these choices under the worst marginal conditions. [The time t required after closing the circuit for the fork tines to reach an amplitude a_t is related to the Q, the resonance frequency f, and the final steady state amplitude A as follows: $a_t = A\left(1 - e^{-\frac{\pi f t}{Q}}\right)$]. The copper slugs shown in Figure 1 are used to provide electromagnetic damping to obtain the proper values of Q.

The sensitivity of the selectors depends upon several factors in addition to Q, such as the force factor, effective mass, contact gap, and the frequency. With four selectors in a common coil, about 0.7-milliwatt available power is required at each frequency to operate the contacts.

The frequency of the selectors can be adjusted to within 0.05 cycle of the wanted frequency by the tuning bars shown in Figure 1. Over a temperature range of −40 to +185 degrees Fahrenheit, the selector frequency changes less than ±0.5 cycles.

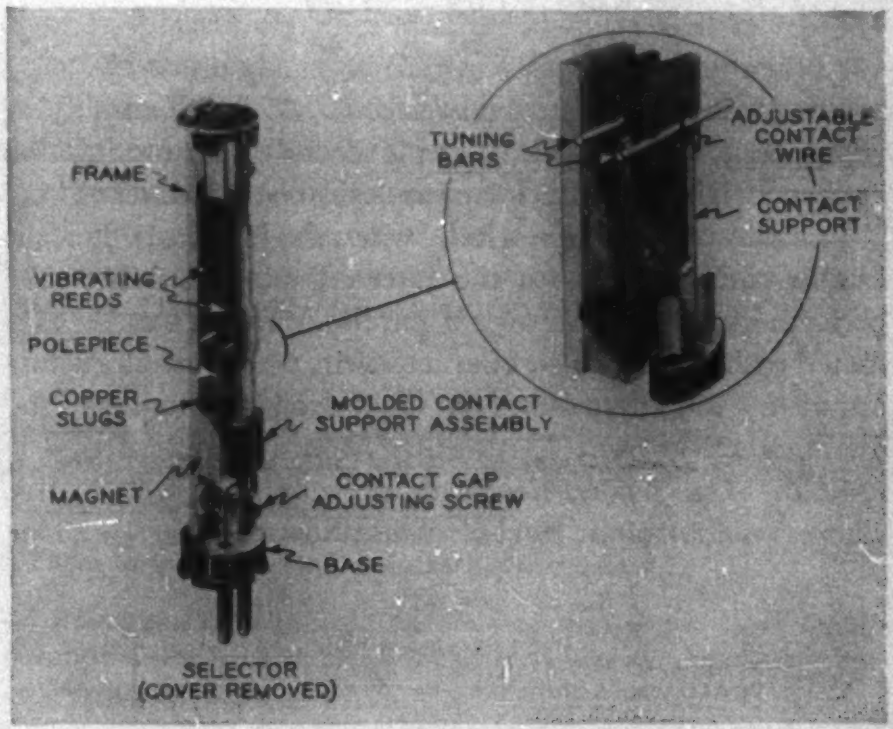

Figure 1. Vibrating reed selector with contact

By bending the tuning bars toward the base of the selector, the frequency is increased, and by bending them away from the base, the frequency is lowered. This effect is the result of changing the effective mass of the reeds.

Performance Characteristics of Filter Selectors. At the fixed station, vibrating reed selectors without contacts are used to provide sharply selective filters. This is accomplished by an impedance bridge circuit in which the vibrating selector is in one arm that is unbalanced by the electrical motional impedance of the selector. For this filter application, the selectors are given a Q in excess of 1,000 by omitting the damping slugs previously described for the mobile station selectors. At 15 cycles or more from resonance of the selector, the transmission loss is greater than 50 decibels.

REFERENCE

1. Vibrating Reed Selective Signaling System for Mobile Telephone Use, Harold M. Pruden, Daniel F. Hoth. AIEE *Transactions* (*Proceedings* T999), volume 68, 1949.

Digest of paper **49-99**, "Vibrating Reed Selectors for Mobile Radio Systems," recommended by the AIEE Communication Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

A. C. Keller and **L. G. Bostwick** are both with the Bell Telephone Laboratories, Inc., New York, N. Y.

Transconductance of Electron Tubes

T. SLONCZEWSKI
MEMBER AIEE

ALL OF the functions of an electron tube when used as an amplifier, modulator, frequency doubler, or rectifier, can be formulated in terms of a plate-current-grid-voltage (*i-e*) characteristic expressed as the sum of constant, linear, and square terms in *e*. The characteristics of actual tubes often have such parabolic regions, which can be identified easily on a transconductance-grid-voltage (*g-e*) characteristic by observing that the part corresponding to the parabola on an *i-e* characteristic is a straight line on a *g-e* characteristic.

The *g-e* curve is derived from

$$I_p = \int_{-\infty}^{E_c} g\,de + Gv + \frac{1}{2}\frac{\partial g}{\partial e}v^2 + \frac{1}{6}\frac{\partial^2 g}{\partial e^2}v^3 + \frac{1}{24}\frac{\partial^3 g}{\partial e^3}v^4$$

where gde is the space current at $v=0$, Gv is the amplifying component, and the third term is second-order modulation current. Higher terms mean undesirable modulation.

In a pentode and in a triode, when the load impedance is low in comparison with the internal tube resistance, the performance of a tube over a parabolic range can be estimated easily from the *g-e* characteristic, which usually is furnished by the manufacturer. Referring to Figure 1, the fundamental current I_p resulting from an input $P\cos pt$ is $I_p=GP$. The second-harmonic current is $I_{2p}=\Delta gP^2/4\Delta e$. The second harmonic level of an amplifier tube is $H_2=20\log(I_p/I_{2p})=20\log[(E_c-E_0)/P]+12$. The largest possible output current of a frequency doubler occurs when $P=\Delta e/2$ and is $I_{max}=\Delta g\Delta e/16$. The rectified current is $I_{dc}=\Delta gP^2/4\Delta e$. The largest rectified current occurs when $P=\Delta e/2$ and is $I_{max}=\Delta g\Delta e/16$.



Figure 1. *g-e* characteristic having principally second-order modulation over part of the range



Figure 2. *g-e* characteristic exhibiting third-order modulation



Figure 3. *g-e* characteristic exhibiting fourth-order modulation

In a modulator, when the input voltage is $P\cos pt+Q\cos qt$ the useful output current is $I_{p\pm q}=PQ\Delta g/2\Delta e$. The maximum possible current occurs when $P=Q=\Delta e/4$ and is $I_{max}=\Delta g/32\Delta e$. When the modulator is used as a detector, P is small and $Q=\Delta e/2$. Then, $I_{p\pm q}=P\Delta g/4$ and the conversion transconductance is $G_c=\Delta g/4$.

In cases where the *g-e* characteristic departs from a straight line, higher-order modulation products are generated. If third-order modulation is present, the *g-e* characteristic usually sags in the middle by the amount S (see Figure 2).

Then, the effective transconductance becomes a function of the input voltage, $G_e=G+S(P/\Delta e)^2$. At an input $P=\Delta e/2$, this is $G_e=G+S/4$. There will be present in the output a third harmonic. Its level will be $H_3=20\log(G/S)+40\log(\Delta e/P)+10$. At an input $P=\Delta e/2$ this reduces to $H_3=20\log(G/S)+22$.

If fourth-order modulation alone is present, the *g-e* characteristic has an inflection point. Referring to Figure 3, the fourth-harmonic level of an amplifier will be $H_4=20\log(G/D)+60\log(\Delta e/P)+12$. For $P=\Delta e/2$, this reduces to $H_4=20\log(G/D)+30$. A rectifier now does not obey the square law. The error is $\Delta I_{dc}/I_{dc}=3DP^2/\Delta g(\Delta e)^2$. A frequency doubler is subject to the same error. In a modulator, the conversion transconductance is not constant $G_c=\Delta g/4+3D/8+3DP^2/2(\Delta e)^2$. In a heterodyne oscillator, a second harmonic appears in the modulator output. Its level for the maximum output is $H_2=20\log I_{p-q}/I_{2p-2q}=20\log(\Delta g/D)+14$.

Digest of paper 49-106, "Transconductance as a Criterion of Electron-Tube Performance," recommended by the AIEE Electronics Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Not scheduled for publication in AIEE *Transactions*.

T. Slonczewski is with the Bell Telephone Laboratories, New York, N. Y.

Matching McNary Electrical Characteristics With Bonneville Transmission System

B. V. HOARD
MEMBER AIEE

LEWIS WEINER
ASSOCIATE AIEE

Low-reactance powerhouse equipment would increase costs for the McNary Dam installation by $3,200,000. Combining cost analysis with network analyzer studies, however, showed that this increase would be more than offset by transmission-line savings. Over-all savings of $7,000,000 are estimated.

CARRYING out the planned orderly development of the Columbia River for power, navigation, reclamation, and flood control purposes, the Federal Government has selected the McNary Dam site as the next major project. The site is located on the main stem of the lower Columbia River between the present Bonneville and Grand Coulee dams and near Umatilla, Oreg. The dam will produce slack water 59 miles up the river to a point 32 miles above the mouth of the Snake River. The ultimate installed capacity of the power plant will consist of 14 generating units rated at 73,684 kva each at 95 per cent power factor, thereby permitting the plant to generate 1,127,000 kw at rated power factor, including an overload of 15 per cent which the generating units are being designed to handle. Present plans call for the installation of 10 to 12 of these units, with the balance of the machines to await the development of other up-stream plants which will provide sufficient increased storage reservoir capacity to justify further installation.

The McNary Project, being constructed on a navigable stream with important navigation as well as power features, will be under the authority of the Corps of Engineers, United States Army, and hence will be designed, constructed, and operated by that agency. The Bonneville Power Administration has the responsibility of transmitting and marketing the power and providing for payout of costs of the transmission system and those costs of the generating station chargeable to power purposes for all Federal multipurpose projects within the Columbia River Basin. Hence, the Administration will receive the power generated at McNary and will provide the transmission network necessary to deliver this power to the distant load centers. It is vitally interested in the cost features of the dam and generating plant which are properly chargeable to power.

The engineers of both Federal agencies recognized that the electrical characteristics built into the generating and transformer equipment at McNary would have a great effect upon the over-all economy and the operating characteristics of the complete system, and that close cooperation between the two agencies would obtain a combination of generating plant and transmission system which would serve the needs of the area adequately and total the least cost to the Federal Government. Accordingly, the agencies have worked closely together to this end. The Corps of Engineers requested the Bonneville Power Administration to study and recommend the characteristics for the generators and transformer to be installed at McNary. This request resulted in the following:

1. The generators should have a transient reactance not greater than 32 per cent on the generator rating of 73,684 kva at 95 per cent power factor.

2. Continuous damper windings should be provided that will give a ratio of X_q''/X_d'' not greater than 1.1, as determined by tests at air-gap excitation corresponding to rated current, power factor, and voltage, with X_q'' determined from X_2.

3. The exciter response should be not less than 1.5.

4. The transformers should have a reactance of not more than 8 per cent on the bank rating of 169,500 kva with two generators connected to a bank.

Following these recommendations, cost figures were compiled by the Corps of Engineers which indicated that the transient reactance for minimum-cost machines for the McNary installation would be 44 per cent on a base of 73,684 kva. With an additional installed cost of $1,550,000 for 14 machines, it would be possible to obtain machines having the recommended transient reactances of 32 per cent. Similarly, reactances for minimum-cost transformers, each bank of which is designed to carry the output of two generators, would be 13.5 per cent on a base of 169,500 kva, but this value could be reduced to as low as 8 per cent with an additional cost of $590,000 for seven such banks of transformers. Other additional costs would be incurred with low-reactance units because of the greater physical size of such equipment. These costs included greater investment in the powerhouse and crane, and an equivalent capitalized value due to lowered generator efficiency. The total increased cost for reduced reactances for both machines and transformers was calculated to be $3,200,000 including all these factors, as compared with the cost of minimum-cost equipment. Obviously, a strong justification was needed for the expenditure of $3,200,000 for special characteristics for the McNary generators and transformers; therefore the

---

Essentially full text of paper **49-209**, "Matching Electrical Characteristics of McNary Generators and Transformers with Bonneville Power Administration Transmission System," recommended by the AIEE Transmission and Distribution Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Pacific General Meeting, San Francisco, Calif., August 23–26, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

B. V. Hoard and **Lewis Weiner** are both with the Bonneville Power Administration, Portland, Oreg.

Acknowledgment is given to R. C. Schuknecht and L. K. Fisher, Portland office, Corps of Engineers, United States Army; and to E. C. Starr, Consultant, Bonneville Power Administration, for their excellent assistance and co-operation in arriving at a satisfactory solution to this important problem.

Corps of Engineers requested the Bonneville Power Administration to prepare this justification.

SYSTEM STUDIED

The most satisfactory measure of the benefits to be gained from lower reactance facilities at McNary is a comparison of the maximum power which can be transmitted over the power system with high-and low-reactance terminal equipment, and a determination of what additional transmission facilities must be installed with high-reactance equipment to obtain the same stability as with low-reactance equipment. These factors were obtained through use of the Administration's a-c network analyzer.

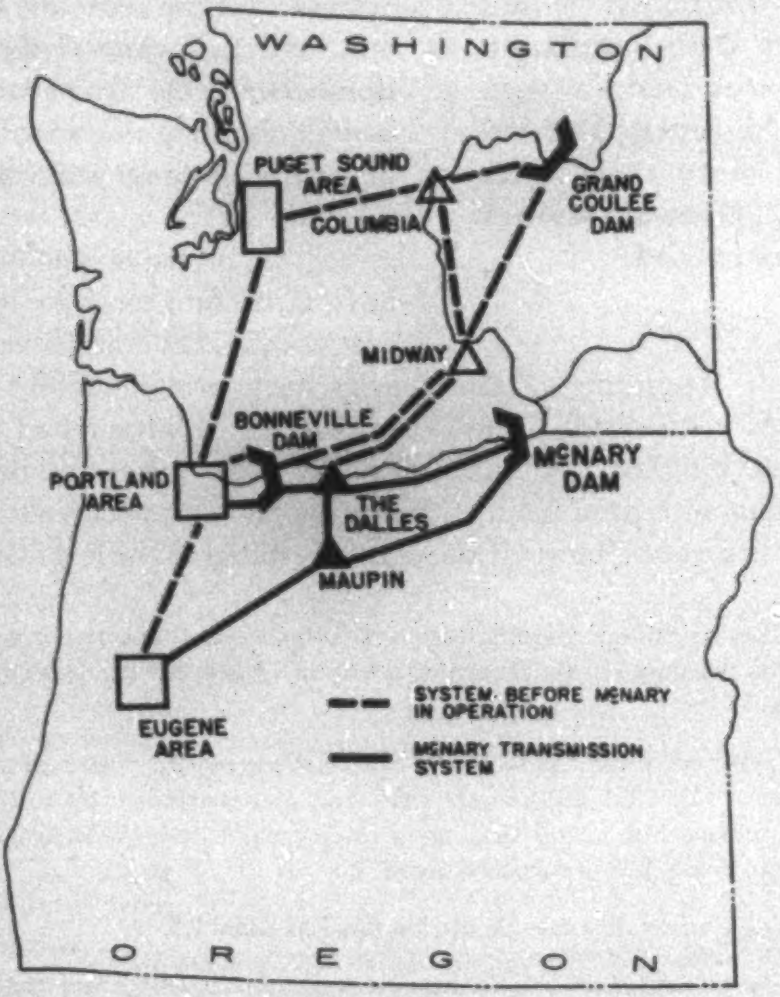

Figure 1. Geographical location of McNary Dam and associated transmission system

In making the study, a simple 3-machine equivalent system was devised, which would be expected to act reasonably like the actual system. This system is shown as set up for various load studies in Figures 2, 3, and 4. The major components of this simplified system are indicated geographically in Figure 1. Generator and transformer characteristics are given in Table I. This system consisted of the McNary generators and equivalent receiver-end machines at Portland and Eugene, with the latter two equivalent machines representing the composite effect of all generators in the two areas, which experience has shown will act as a group for faults which are far removed from these areas. The transient reactances and inertia factor selected for these receiver-end machines are an approximation of the weighted average for all generators and synchronous condensers considered. The reactances of the receiving-end transformers also were based on average values of all transformers in the area, with an allowance for the reactance of the distribution and transmission system between the actual generating plants and the high-voltage receiving-end busses at Portland and Eugene.

The transmission network consisted of essentially three 200-mile 230-kv lines from McNary to the Portland area, utilizing 800,000-circular-mil copper equivalent conductor, with a sectionalizing station at The Dalles, 110 miles from McNary; two 105-mile 230-kv lines utilizing this same conductor from McNary to Maupin, and one similar line from Maupin to the Eugene area, a distance of 140 miles. A 40-mile 230-kv line connects The Dalles and Maupin, and the equivalent impedance between the Portland and Eugene areas represents the impedance of transformers and 115-kv lines between the 230-kv busses in these areas. From a study of the normal operating power factors of the individual generators in the Portland and Eugene areas and including the effects of synchronous condensers, it was possible to approximate the power factor at which the equivalent generators used in the study should operate. The power factor of the receiving-end loads then was adjusted so that the proper generator power factors were obtained on the equivalent network.

This process might be considered comparable to the adding of static capacitors on the system for the purpose of limiting the reactive requirements on the generating plants. Admittedly, the simplified network cannot be expected to perform exactly as the actual system, but, as will be pointed out later, the net error should be small in view of the comparison method used to obtain results.

In previous studies it had been established that the most severe fault for the system would be near McNary on one of the lines to The Dalles, in spite of the fact that the circuits between The Dalles and Portland would be somewhat more heavily loaded than those between McNary and The Dalles. Accordingly, a 3-phase fault was assumed at McNary on one of the lines to The Dalles. The faulted line was assumed to be cleared simultaneously at both ends in $3^1/_2$ cycles and reclosed at both ends in 21 cycles through the use of microwave relaying and high-speed reclosing. This

Table I. Generator and Transformer Characteristics

Generator Characteristics	Transformer Characteristics
McNary*	
44 per cent X_d' on 73.68-megavolt-ampere base, $WR^2=186\times10^6$ pound-feet squared	7 units at 170 megavolt-amperes each (for two generators)
32 per cent X_d' on 73.68-megavolt-ampere base, $WR^2=219\times10^6$ pound-feet squared	$X=8$ per cent to 13.5 per cent on 170-megavolt-ampere base
14 units at 70 megawatts, 73.68 megavolt-amperes, 95 per cent power factor	
Maximum loading, 1,128 megawatts (15 per cent overload)	
Portland Area	
$X_d'=40$ per cent on 1,500-megavolt-ampere base, $H=4$	$X=30$ per cent on 1,500-megavolt-ampere base (includes equivalent system)
Eugene Area	
$X_d'=40$ per cent on 500-megavolt-ampere base, $H=4$	$X=30$ per cent on 500-megavolt-ampere base (includes equivalent system)

* WR^2 includes estimated values for generator plus water wheel.

clearing and reclosing time is about the ultimate which reasonably might be expected by the time the McNary generation is installed.

PROCEDURE

The first step in the procedure was to obtain a load-flow diagram of the system using low-reactance generators and transformers with the 14 machines at McNary loaded to 1,128 megawatts, including the overload capability of 15 per cent, then to check the transient stabliity of the system for the fault assumed. The result of this procedure is shown in Figure 2, which was transiently stable for the fault assumed with a maximum swing between machines of 104.5 degrees.



Figure 2. Equivalent system, basic transmission system, low-reactance equipment

McNary reactances $X_d'=32$ per cent on 73.68-megavolt-ampere base
X transformer = 8 per cent on 170-megavolt-ampere base
1,128-megawatt output at McNary
Maximum swing = 104.5 degrees

It will be demonstrated later that this power swing was very close to the transient stability limit, since an increase in loading of the order of one per cent of the output of McNary would result in instability. In Figure 2 the output of McNary was 1,128 megawatts. The three McNary–The Dalles lines carried 610 megawatts, and the three lines from The Dalles to Portland carried 652 megawatts. The power factor of the output of the Portland and Eugene area equivalent generators was held at 85 per cent and 88 per cent, respectively, and the voltage at the high-side bus at McNary was held at 246 kv, which value had been established previously by other network analyzer studies of the original system.

The second step in the procedure, starting with the identical system as used in the preceding paragraph, was to substitute high-reactance transformers and generators at McNary for the low-reactance equipment and determine how far down the loading on McNary must be dropped to gain the same degree of system stability as in Figure 2. All local loads and receiver-end generators were held constant, except that the local load at the Portland area was varied to control the output of the McNary plant. Assuming the same fault, clearing time, and reclosing as previously, it was found that the output at McNary had to be decreased from 1,128 megawatts to 1,012 megawatts, if high-reactance equipment is installed at McNary and no new transmission lines are constructed. This loading had a maximum swing of 102.5 degrees, essentially the same as for that of Figure 2.

Assuming identical transmission systems, the permissible loading of the generating station was decreased 116 megawatts or 10.3 per cent by the use of high-reactance equipment as compared to the use of low-reactance equipment. The permissible loading on the transmission system from McNary to Portland and Eugene was decreased from 978 megawatts to 862 megawatts by the use of high-reactance equipment, a decrease of 11.9 per cent.

The next phase of the problem was to determine what additions must be made to the system so that the generating station can be loaded to the 15 per cent overload value of 1,128 megawatts with transient stability if high-reactance equipment is installed.

Accordingly, a fourth line section was assumed installed between The Dalles and Portland, the most heavily loaded portion of the system, and the McNary plant was loaded to 1,128 megawatts by increasing the local load at the Portland area. The resultant loading is given in Figure 3. For the fault, clearing time, and reclosing assumed previously, this system was insufficient as it was unstable.

Then a fourth line was assumed installed between McNary–The Dalles–Portland area, and the system again balanced to 1,128-megawatts output of McNary as shown in Figure 4, using essentially the same substation loads as in Figures 2 and 3. This loading proved to be transiently stable with a maximum swing of 101.5 degrees.

An additional study was made to demonstrate that the differences in the angle of maximum swing obtained for loadings corresponding to those preceding which are stable



Figure 3. Equivalent system, additional transmission line between The Dalles and Portland, high-reactance equipment

McNary reactances $X_d'=44$ per cent on 73.68-megavolt-ampere base
X transformers = 13.5 per cent on 170-megavolt-ampere base
1,128-megawatt output at McNary
System unstable



Figure 4. Equivalent system, additional transmission line between McNary and Portland, high-reactance equipment

Reactances and output as given in Figure 3
Maximum swing = 101.5 degrees

do not represent any significant difference in system stability, and that these loadings are very close to the transient-stability limit. To prove this the system loading shown in Figure 4 was increased by only 20 megawatts in the Portland area. This load increase amounts to less than two per cent of the output of McNary, but this slight addition resulted in a change from a stable condition with an angle of maximum swing of 101.5 degrees to an unstable condition. This indicates that the preceding stable system loadings are such that the system stability is practically identical and very close to the transient stability limit.

From these load studies it was concluded that if high-reactance equipment is purchase for McNary, it will be necessary to build an additional 230-kv line from McNary to The Dalles to the Portland area, a distance of approximately 200 miles.

SUMMARY OF NETWORK ANALYZER STUDIES

1. With three 230-kv lines between McNary and the Portland area and low-reactance equipment at the generating station, the system is transiently stable for the full 1,128-megawatt output of McNary including the 15 per cent overload.

2. With the same transmission system as the foregoing but with high-reactance equipment at the generating station, the output of McNary must be reduced to 1,012 megawatts to assure transient stability, a decrease of 116 megawatts or 10.3 per cent of the total output of the generating station. The corresponding decrease in the permissible loading on the McNary–The Dalles lines was 11.9 per cent.

3. To assure system stability for 1,128-megawatt output of McNary using high-reactance generators and transformers, it will be necessary to construct a fourth 200-mile line from McNary to The Dalles to Portland.

4. System loadings in all these cases are essentially identical from the point of view of transient stability and are very close to the transient-stability limits.

5. While the method used in the individual studies may have inherent error due to over-simplification and inability to get exact equivalents of the receiving-end portion of the system, the conclusions of the study are formed by obtaining incremental capability of the system through comparison of two or more studies; therefore possible inaccuracies should almost all cancel out.

COST ANALYSIS

A cost analysis of the system was made for two cases, the first having low-reactance equipment and one less transmission line as shown in Figure 2; the second having reactance corresponding to minimum-cost generators and transformers but with the additional transmission line as shown in Figure 4.

In order to minimize any possible inaccuracies, the method of obtaining incremental costs in the transmission system and in the generating station was used to determine the benefit-to-cost ratio. A summary of this cost study is given in Table II. Information for costs in the generating station was supplied by the Corps of Engineers and included factors for increased powerhouse and crane cost and capitalized values of energy lost due to reduced machine efficiencies when low-reactance equipment was being considered. For the transmission system a capitalized value for the increased transmission losses caused by the use of one less line was included.

The results of this study indicated a very large saving in the transmission system and a net over-all saving to the government of over $7,000,000 through purchase of low-reactance equipment at McNary, even though the value of increased equipment cost would be over $3,000,000. The benefit-to-cost ratio is of the order of 3.2, which would indicate that from an economic standpoint still lower machine and transformer reactances could be justified. This was considered; however, physical size of the equipment became a determining factor. For example, transformers with eight per cent reactance are the largest which could be conveniently shipped as a unit—any larger size would have to be assembled in the field. There are physical limitations in the generating unit also which resulted in the manufacturers recommending against going to any larger size. However, the high ratio of benefits to cost obtained through lowering the reactances of the McNary generators and transformers does appear to justify fully the obtaining of low-reactance equipment for this plant.

Table II. Cost Analysis

Transmission Line		
Cost of additional 230-kv line with four circuit breaker positions in lieu of low-reactance powerhouse equipment at 1948 cost values using 800,000-circular-mil equivalent copper conductors		
McNary–The Dalles section—110 miles at $48,000 per mile—includes right-of-way and clearing	$5,280,000	
The Dalles–Portland section—90 miles at $62,000 per mile—includes right-of-way and clearing	5,580,000	
Four 230-kv circuit-breaker positions at $218,000	870,000	$11,730,000
Subtracting capitalized value of additional line losses by having one less line in service with incremental loss of peak firm and peak secondary power from Figures 2 and 4=12,400 kw. Average value per peak kilowatt incremental loss: $5.67 per kilowatt-year. Interest, replacement, and operations and maintenance 4.8 per cent. 12,400×5.67/0.048		1,470,000
Net system savings available for reducing powerhouse equipment reactances		$10,260,000
Powerhouse Equipment		
Increase cost of 14 generators because of reduced reactance and increased installation cost	$1,550,000	
Increased cost of seven transformers because of reduced reactance and increased installation cost	590,000	
Capitalized value of lower generator efficiency due to low-reactance generators. Estimated reduction in efficiency, 0.4 per cent. Value at $185 per installed kilowatt. $185×70,000×14×0.004	730,000	
Estimate of increased powerhouse and crane cost due to low-reactance equipment	300,000	
Increased cost chargeable to low-reactance equipment		3,170,000
Net Over-all Saving		$ 7,090,000

CONCLUSIONS

It is believed that the results of this study will be of major interest to the industry, for while most engineers agree that low-reactance equipment should be used, the question of justifying such equipment economically nearly always presents a major problem. It is recognized that each project becomes an individual problem to be studied in accordance with the peculiar conditions arising, for it is the combined system, including both transmission and generation, which must be studied. This article presents, in our opinion, a very satisfactory method of investigating and solving this type of problem. We believe this method can be applied successfully in many cases.

An Analysis of Magnetic Recording

C. S. THOMPSON

MAGNETIC recording is the process of transforming electric impulses, varying with time, from an electric circuit to a succession of fixed magnetic fields, varying with distance, along a filament of ferromagnetic material. The magnetic-field space variations are closely proportional to the time variation of the original electric impulses for good recording. The transformation of electric impulses to variations in magnetic field along a wire or tape is accomplished by passing the ferromagnetic wire or tape across an air gap in the iron core of an electromagnet energized by current impulses passing through the coil of the electromagnet. Passing the magnetized wire or tape across the air gap of a similar electromagnet causes a voltage to appear across the terminals of the coil of this second electromagnet. The first electromagnet, used for impressing the electric impulses upon the magnetic recording medium, is called the recording head. The second electromagnet referred to, used for retranslating the stored magnetic impulses into electric impulses, is called the play-back head.

Figure 1*A* shows the signal to be recorded as a sine wave of current in the coils of the recording head; Figure 1*B* shows an enlarged view of the recording wire or tape. The small arrows represent symbolically the alignment of the so-called "molecular magnets." Immediately below the wire or tape, the recording head is shown with flux lines threading its core. The bottom leg of the core is surrounded by an energizing coil. The pole tips are marked with an assumed polarity indicated by the symbols *N* and *S*. The play-back signal produced by this passage is shown in Figure 1*C*.

Among the most important considerations are those of the magnetic characteristics of the recording medium itself. For each reversal of polarity, the medium is subjected to magnetic changes described by the familiar hysteresis loop. Because of the nonlinear characteristic of the hysteresis loop, the relation between the impressed magnetic field strength, H, and the residual induction, B_r, suffers a severe distortion unless a so-called biasing magnetic field of a constant frequency much higher than the signal frequency is impressed simultaneously with the signal to be recorded.

The various component characteristics influencing the over-all fidelity of a magnetic recording system are

1. Magnetic skin effect in the magnetic circuit of the recording head.

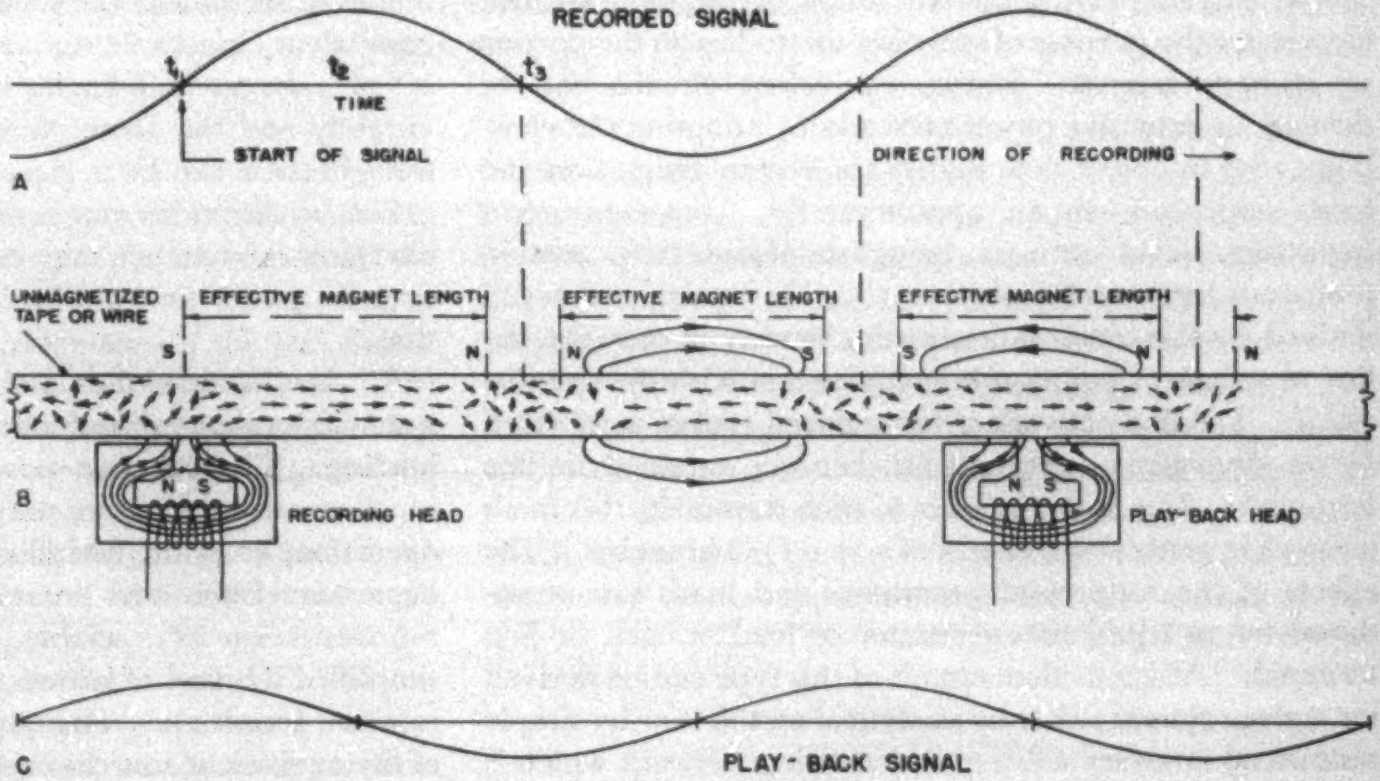

Figure 1. Diagram illustrating theory of magnetic recording

2. Magnetic skin effect in the play-back head.
3. Influence of the air-gap length in the play-back head.
4. Demagnetization effect.
5. Recording circuit impedance.
6. Play-back circuit impedance.

Experimental evidence shows that magnetic skin effect as a function of core lamination thickness is more important than had been believed previously. High-frequency cut-off can be raised considerably by using very thin laminations. In this connection, The Franklin Institute, under contract to the Special Devices Center, United States Navy, is constructing a series of recording and playback heads to determine the optimun thinness of laminations.

The criteria for judging the operating excellence of a magnetic recording system are the frequency response curves of the fundamental frequency, harmonic distortion, and the noise content. The operating factors influencing the output characteristics are the frequency and amplitude of the bias current, the frequency and amplitude of the signal current, the wire velocity, the air-gap length, the characteristics of the recording medium, and the characteristics of the recording and play-back heads.

Digest of paper 49-107, "Application of Experimental Test Procedures and Methods of Analysis of Results to Research Problems in Magnetic Recording," recommended by the AIEE Communication Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

C. S. Thompson is with the Franklin Institute, Philadelphia, Pa.

Equivalent Circuits for Power-Flow Studies

J. B. WARD
ASSOCIATE AIEE

NETWORK ANALYZER STUDIES of power-flow conditions on large interconnected systems frequently require preliminary simplification and reduction of the network because of the limited number of analyzer circuits and sources available. Even in smaller systems which do not exceed the capacity of the analyzer being used, it is sometimes desirable to represent in detail only a portion of the system, simplifying the remainder by use of equivalent circuits for the purpose of speeding up studies on the portion of primary interest. Simple equivalent circuits can be devised for extensive power networks by adopting the viewpoint that in power-flow studies the system generation and loads approach, as an approximation, constant-current quantities. The network being simplified may contain numerous loads and generators, but the equivalent circuit derived by this method retains the identity of only the tie-line terminals or points of interconnection with the detailed setup. The line network of the reduced system is replaced by an equivalent mesh network between retained tie-line terminals. If m is the number of such terminals, this mesh network in general will consist of $m(m-1)/2$ branches. The effects of the suppressed generators and loads are reproduced by an equivalent generator or load at each tie-line terminal. An equivalent circuit of this type can be derived for a given system either by analytical methods or by simple tests on an analyzer setup of the complete network which is to be reduced. The equivalent circuit is flexible in that any schedule of internal generation and loads can be reproduced readily without the necessity of repeating the reduction or of making additional tests.

The equivalent loads and generators are determined by application of the principle of superposition. Each generator and load in the reduced network contributes to the equivalent net source or load at each tie-line terminal. In treating loads and generation alike as current sources, the distinction between them is merely a matter of relative phase position of the currents. The contribution of one suppressed source at the retained terminals can be determined by impressing unit current at that bus with all other sources open (loads, generators, and capacitors) and with the tie-line terminals short-circuited to neutral. The fractions of unit current input which leave by way of the several short-circuited tie-line terminals are treated as distribution factors to apportion at the retained terminals a scheduled loading of the bus which is energized. Similar distribution factors are determined for each load and generator bus in the reduced network. When all generation and load is reflected to the tie-line terminals in this fashion, the actual line network is replaced by an equivalent network of transfer impedances between the retained tie-line terminals.

Some of the assumptions, limitations, and additional features of the equivalent circuit method are summarized briefly in the following.

1. In most power-flow studies the bus voltages and angles in sections of the system which might be replaced by equivalent circuits do not vary widely. An initial, normal set of voltages and angles can be taken into account accurately and the assumption made that subsequent variations in these can be neglected.

2. Synchronous condensers, static capacitors, and line charging capacitance may be treated as separate sources of reactive power or combined with nearby loads or generation.

3. It is assumed that loads and generation in the reduced system operate at a fixed schedule of real and reactive power loading. The reactive power output of generators and synchronous condensers may be subject, in actual system operation, to wide variations, thus introducing a serious departure from the constant-current assumption. The representation of variable reactive power generation is simplified if busses of known, fixed voltage are chosen as the retained terminals. Then, only the real-power component of the equivalent sources need be determined.

4. Effects of off-nominal transformer tap settings in the reduced system can be reproduced approximately in the equivalent circuit.

5. A d-c board can be used to determine the equivalent line network and distribution factors if it is assumed that transformer taps are on nominal ratio and impedance angles are uniform.

6. The net equivalent sources can be determined by an alternative method involving network analyzer measurements on a setup of the complete network. To obtain the net equivalent sources, normal-flow loadings on tie lines are combined with the circulating flow appearing in the equivalent mesh network as a result of the same normal-flow terminal voltage and angle differences.

7. If the equivalent circuit calls for several analyzer generator units and they are not available, further reduction can be made, at the expense of additional line units, to evolve an equivalent circuit requiring only one analyzer power source.

8. In applications to power-flow studies, the methods are not exact. The degree of approximation involved depends on the special conditions and characteristics associated with individual systems.

Practical experience with this type of equivalent circuit in system studies has yielded good results. The methods used seem to be well suited for representing intercompany ties.

Digest of paper **49-96**, "Equivalent Circuits for Power-Flow Studies," recommended by the AIEE Systems Engineering Committee and approved by the AIEE Technical Program Committee for presentation at the AIEE Winter General Meeting, New York, N. Y., January 31–February 4, 1949. Scheduled for publication in AIEE *Transactions*, volume 68, 1949.

J. B. Ward is on the staff of the School of Electrical Engineering, Purdue University, West Lafayette, Ind.

A Telephone Number Recorder

F. HINTON F. E. PLANER

An instrument is described for use on the terminals of a telephone to provide a subscriber with a printed record of the telephone numbers of callers who have telephoned during his absence. The instrument is simple to install and operate, and is considerably less complex and costly than an automatic spoken-message recorder.

THE WISH to record telephone calls made during the subscriber's absence is a very old one. The problem has occupied inventors since the time the first public telephone systems were installed, as is proved by the number of patent applications in this field. The various devices proposed for this purpose have in common the use of a recorder of the type employed in dictaphones, together with an arrangement for playing back to the caller a short recorded announcement to inform him of the absence of the called subscriber and of the fact that a recording will be made of any message spoken. The devices usually contained various combinations of switches and relays to ensure the correct sequence of events in the cycle of operation.

Owing to the many technical difficulties which have had to be overcome in their design, recorders of this type have not been introduced into practice until quite recently. These instruments, installed in limited numbers in various parts of the world, have aroused interest everywhere. Their recording, play-back, and announcing systems and associated electronic amplifying circuits, together with the relatively complex switching arrangements required, have led to a machine which is of considerable size and weight, and whose cost or rent would appear to be considerably beyond the reach of the average telephone subscriber. Therefore, these instruments are used mainly by businesses and large stores desirous of affording a day and night service for the ordering of goods, and so on, as well as by doctors who may wish to give their patients the facility of recording messages, while they are away from their offices.

To overcome the difficulties arising from the complexity, high cost, and large size of automatic recording instruments of this type, the task of solving the problem of the "absent subscriber device" on an entirely new principle was begun. The new approach was based on the consideration that in the majority of instances, it is sufficient to record the telephone number of the caller, instead of a spoken message. Thus the subscriber is presented, on his return, with a record of the telephone numbers of the various callers who have telephoned during his absence, allowing him to get in touch with these callers in such sequence as he may think necessary, and without the delay of listening to a program of messages.

The development of this idea led to the design of an instrument which fulfills the important requirements of simplicity, smallness, and low cost. Before describing the various features of the design in more detail, the method of operation of the new instrument will be summarized briefly. On establishing the desired connection with a terminal fitted with the apparatus, the caller will obtain a ringing tone in the usual way. After a predetermined interval of time—which would allow the called subscriber to intercept the call had he returned—a distinct signal is transmitted to the caller to indicate the presence of a number recorder at the other terminal of the line. The caller may proceed then to dial his own number, or any other number on which he desires to be called back. This number will be printed automatically on a strip of paper which issues from the number recorder. On his return the owner of the apparatus will find the record of this number, as well as that of any other calls made during his absence.

INSTALLATION

An apparatus on the principle described could be operated immediately on any private automatic telephone system, such as an internal intercommunication system in a factory or hospital, or in a railroad or police system, and so on. It is believed that recorders of this type would have definite attractions from the point of view of the telephone operating authorities, as their installation is likely to result in a considerable increase in the number of chargeable calls. Another important factor is that they would tend to reduce the time during which lines and exchange equipment are occupied by calls made to absent subscribers, obviating, in particular, repeated attempts by a caller to contact a subscriber who is absent for a prolonged period.

In its operation the number recorder relies on the transmission of transients derived from the original d-c pulses sent out by the caller's operation of the dial. These signals are received by the recorder, amplified, reshaped and regrouped, and eventually made to operate the printing mechanism. The installation of the recorder is simple and no equipment or circuit changes would be required either at the exchanges or the subscriber's terminal, other than the connection of the instrument to the line and to the existing handset.

A number of experimental models of the new instrument were evolved, and in its final form the recorder consists of a self-contained unit occupying a volume of no more than

---

F. Hinton is Proprietor of Toolit Ltd., Sunbury-on-Thames, England.
F. E. Planer is Director of the Addison Electric Company, Ltd., London, England.

one-sixth of a cubic foot. With the exception of the small printing mechanism, the instrument contains standard parts, and its maintenance consists mainly of changing a spool of tape at relatively long intervals. Its power consumption during the reception of a call is approximately 30 watts, which is less than that of an ordinary electric light bulb.

OPERATION

With the line and handset connected as indicated, and the provision of a continuous power supply to the instrument, the number recorder is ready for operation. During normal telephone conversations the recorder is disconnected completely by setting a selector key, situated on the front panel of the instrument, to the "phone" position. On leaving his premises, the subscriber sets the key to "record;" then the handset is disconnected and the number recorder is ready to receive calls. No power is consumed during waiting periods. On the reception of a call, the ringing current from the exchange operates a relay in the recording instrument which switches on the power supply to an amplifying valve, allowing sufficient time for the filament to heat up, and starting up a thermal timing device. At the same time, a small pilot light on the front panel lights, indicating that a call is being received. In addition, a separate bell in the recorder is operated directly by the ringing current to call the attention of the subscriber to the fact, should he inadvertently have left the selector key in the "record" position, while he is at home. The timing device allows the bell to ring for a period of 15 seconds; at the expiration of this period, a distinct signal is transmitted to the caller for a period of five seconds.

The significance of this signal, which serves to inform the caller of the absence of the called subscriber and the existence of a number recorder, of course must be known to him. In the case of a private telephone system, the various users would be made familiar with the use of the recorder, and will dial back the number to be recorded.

The circuit comprises a further timing device which is arranged to release the line and remove the power supply of the number recorder after a period of ten seconds, if during this period no dialing pulses are received. Upon the reception of a new train of pulses, the 10-second cycle is renewed. This feature ensures that the line is occupied for a minimum time whether use be made of the facility of the number recorder, or not. A final tone signal is transmitted at the end of the last 10-second period, which is just prior to the cutting-off of the line, indicating to the caller that no further information will be recorded. This signal is of the same type as the initial signal, and is timed to last five seconds. At the same time, the paper is advanced to provide a gap between successive records, and immediately upon the removal of the power supply and release of the line, the number recorder is ready to receive a further call.

THE PRINTED RECORD

Several alternative printing processes were considered and tried experimentally. The system finally adopted is both simple in operation and maintenance. It consists of a single spool of white paper and a strip of special carbon paper interwound, both paper and carbon issuing through an opening at the side of the case, after passing the type wheel and a printing hammer. The capacity of the small spool is considerable; the total number of calls, for instance, of 7-digit numbers that can be recorded on one strip of paper before a refill spool has to be inserted is approximately 1,000. It is proposed to employ red carbon or paper for the last few inches of tape in order to call the subscriber's attention to the fact that the spool needs replacing. Care was taken in the design to make the insertion of a new spool a very simple operation, so that no special precautions have to be observed. A feeler switch could be arranged to prevent the number recorder from accepting further calls at the end of a spool, although this was not incorporated in the experimental models.

Regarding the record itself, it is in the form of numerals only. An exchange code, therefore, will appear as a number, but dialing of this number establishes, of course, the correct connection.

Resonance Radiation

How do excited atoms in a gas-filled tube behave when the power is switched off? Three scientists, working for the Westinghouse Electric Corporation, now are investigating the problem. Their findings may result in improved fluorescent lamps and electronic tubes, and possibly revolutionary new light sources.

In a fluorescent lamp, for example, their studies reveal that the electric discharge therein does not terminate the exact instant the lamp is de-energized. Actually, the billions of light-producing atoms within the lamp continue to radiate for a few millionths of a second thereafter. This short-lived "posthumous" light, which is termed resonance radiation, bounces from atom to atom of mercury until it eventually escapes. A more exact knowledge of atom behavior during this short interval may unearth new ways of adjusting the "prison term" of the radiation. New and more efficient electronic devices then might be possible.

At present, the group, comprising Dr. Theodore Holstein, Dr. Daniel Alpert, and Arthur O. McCoubrey, is measuring the short-term life of radiation by means of a high-speed device that can turn ultraviolet light on or off in less than one-millionth of a second. When the light strikes a tube filled with mercury vapor, such as a fluorescent lamp, the atoms inside the tube catch this radiation, become excited, and re-emit the same light. The apparatus measures the number of times the radiation is tossed from atom to atom before escaping from the tube.

The behavior of entrapped radiation was predicted two years ago by Dr. Holstein. His theory has been confirmed by the Westinghouse scientists' experiments. Their research also will add to the knowledge of what excited atoms are doing when the tube is in an energized state.

Digests of Papers Presented at Conferences on Textile Industry

These are authors' digests of some of the papers presented at the two special AIEE technical conferences on electrical engineering problems in the textile industry that were held in Boston, Mass., May 3, 1949; and at Georgia Institute of Technology, Atlanta, Ga., May 27–28, 1949. The papers are not scheduled for publication in AIEE Transactions, or AIEE Proceedings, nor are they available from the Institute.

Tandem Drive for Textile Printing Machines; *L. T. Jester (General Electric Company, Boston, Mass.).*

The continuous printing of fabrics with machines operated in tandem requires carefully co-ordinated adjustable speed drives. Electric drives offer several advantages and are generally used in preference to mechanical drives on modern range installation.

Printing machines apply colors in various designs to continuously moving fabric surfaces. The printing machine today consists of a large drum or print cylinder which carries cloth to be printed. Around its circumference are mounted 1 to 16 engraved color rolls, all rolls being driven from a drive gear. Other parts of the machine which carry gray or white goods consist of draw rolls, dry cans or air dryers, winders and folders, all of which must be driven in synchronism with the cloth as it enters or leaves the printer. Storage scrays are sometimes inserted at the entrance or exit to the machine to facilitate continuous operation.

The first drives consisted of belts and pulleys operating with a clutch and receiving power from a line shaft to drive the various units. These drives left something to be desired since they were noisy, bulky, and required excessive maintenance. Many machines actually transferred the motive power from the line shaft or single motor drive through the material to be printed, to the backing cylinder to which were attached pulleys and belts furnishing motive power for the remainder of the units. This method placed undue strain on the cloth since print rolls had to be set with sufficient pressure to prevent slippage while driving the machine. These foregoing factors led to an analysis of the drive in an attempt toward improvement.

Operating requirements such as adjustable speed, slow and stepless acceleration and deceleration, low threading speed, elimination of line shafts, belts, and pulleys, close tension control, and so forth, pointed to an adjustable-voltage Ward-Leonard type of tandem drive. A motor-operated generator-field rheostat was selected to provide gradual but fairly rapid acceleration and deceleration. "Soft" motors were used at all points except print machine and dry cans since they give reasonably constant cloth tension over the required speed range. Load-indicating ammeters were installed on the motors to enable operators to control tension more accurately.

In order to provide accurate speed control at the critical point between the printer and dry cans without contacting the cloth, a tachometer generator is attached to a drag roll at the entrance to the printer and a second attached to the dry can motor. The voltage signals from these two units are compared and inserted in an electronic circuit which controls and partially supplies the field of the dry cans motor, thereby insuring accurate speed control at the critical point.

A surface winder for the gray goods is provided since it requires no special control scheme to vary speed in order to hold tension as the roll builds up. The printed goods are folded after passing through the dry cans.

Draw roll motors at the scray entrance are provided with 50 per cent increase above basic speed to enable scray to be filled while machine is operating at high speed. Field control of 25 per cent above basic speed is provided for the remainder of the motors to permit vernier adjustment between units and to take care of change in print roll diameter occurring before print roll pinion change is necessary.

A complete set of operators controls was provided for mounting near the printer. These consisted of manually adjusted generator field rheostat for preset speed control, master control station containing *RUN-THREAD-JOG-STOP-SAFE-RUN* functions, cloth speed indicator, and draw adjusting potentiometer for dry cans. Tandem-*OFF* stations were mounted near individual motors and emergency stop push buttons actuating dynamic braking installed at strategic points.

Individual drive for each unit permits installation of simple metering equipment which can give reasonable indication of cloth tension as it progresses through the machine thus an additional means of quality control is present which cannot be easily included or adjusted in a line shaft or belt and pulley drive.

The Ratio Meter and Speed Ratio Tachometer as Applied to Textile Production; *Raymond T. Pierce (Weston Electrical Instrument Corporation, Newark, N. J.).*

Before we can appreciate how a speed ratio tachometer or percentage stretch indicator operates, it is necessary to understand the principle of operation of the ratio meter. In the past, a differential meter has been used and calibrated in per cent. This will be correct for one condition only where there is a fixed reference base line for one side of the differential circuit. It will not be correct, when both sides are variable.

The ratio meter resulted from a war-time requirement for measuring relative low temperatures on aircraft engines which had to be shown on a rugged panel instrument. This dictated the use of the resistance bulb method of temperature measurement, but we had to solve the problem of giving correct readings under conditions of direct voltage variations of ±20 per cent.

Ratio meters had been built but none on the permanent magnet moving coil principle which operated on current values low enough to prevent local heating in the resistance bulb.

The ratio meter that was developed was similar to the conventional permanent magnet moving coil instrument mechanism with the following exceptions:

1. There are two moving coils placed end to end, passing through a hole in the center of the core.
2. The air gaps in which the coils turn are not uniform but are identical on each side of the vertical center line. This is accomplished by moving the core out of center along the vertical center line.
3. There are no control springs.
4. The torque of one coil opposes the torque of the other.

If the current in each coil is the same, the torques balance with the coils in the horizontal position. If the current in one coil increases, the torque moves this coil into a weaker magnetic field and the other coil into a stronger magnetic field until the torques balance. The instrument, therefore, indicates the ratio between the two currents.

This mechanism has been placed in a large switchboard instrument case with a transformer and rectifier to provide an industrial remote indicating resistance bulb thermometer which is unaffected by changes in control voltage. It can be connected to any 115-volt 60-cycle circuit.

A flat fast-acting resistance bulb is provided which will measure surface temperatures of yarn in a slasher, fabrics, and the like.

This instrument provided the answer to the problem of making a percentage stretch indicator. We have had available for many years a d-c tachometer generator which produced a voltage proportional to speed. By gearing one of these to the input roll and an identical generator to the output roll, the instrument was connected to these generators to indicate the ratio of the two speeds and was calibrated in terms of per cent stretch.

This same system has been used on sanforizers to show shrinkage, on rug sizing machines to control the amount of sizing deposited, on range finishing machines to show synchronization, and on other applications where the ratio of two speeds or two electrical quantities gives useful production information.

Electronic Instrumentation as Applied to the Textile Industry; *L. E. Cuckler (Minneapolis Honeywell Regulator Company, Brown Instrument Division, Philadelphia, Pa.).*

During the last few years, electronics have become an important industrial tool in the textile industry, particularly in continuous processes. An example of a widely used electronic application may be found in the continuous balance potentiometer. This *ElectroniK* potentiometer is more than seven times as sensitive as the mechanical instrument and furthermore follows changes in a process as they occur rather than trying to catch up with them afterwards as the mechanical does.

The *ElectroniK* potentiometer is a very versatile instrument. It is used for the measurement and control of temperature, moisture, regain, viscosity, pH, humidity, stretch, stress, speed, and many other variables by the use of various primary sensing devices.

Of particular interest to the textile industry is the *Moist-o-Graph* which employs the d-c conductivity principle for the measurement of moisture regain in warp yarn on slashers. The magnitude of a direct current which passes through the yarn bears a definite relationship to the moisture content of the yarn. This current is measured and recorded by the *Moist-o-Graph.*

There are two common methods of regain control employed on slashers. The most frequently used is speed control by the interlocked system (where the *Moist-o-Graph* regulates the set point of the dryer temperature controller) is receiving increased attention. In the second system, the speed is set at the optimum rate for the type of yarn being slashed.

Both viscosity and pH measurements require special sensing elements. The viscosity unit is of the rotational type which measures viscosity by the torque required to rotate the measuring element. pH is measured by glass electrodes which feed their signal to a preamplifier.

Surface temperature of textile materials now can be measured by a low temperature radiation pyrometer and direct relative humidity measurements can be accomplished by means of a Dunmore element. Both of these devices are employed with an *ElectroniK* instrument.

Adaptations of strain gauges to the potentiometer permit textile stress analyses and the use of tachometer generators for measuring speed ratios allows a slightly modified instrument to record stretch between any two convenient points.

Electronics are also employed in flame failure safety devices either by photoelectric cells or devices which utilize flame rectification. Such devices shut off the fuel supply automatically whenever the flame fails.

Another interesting application of electronics in instruments used by the textile and other industries is in electrically operated controllers. The electronic principle increases control sensitivity and greatly decreases the mechanical power needed to actuate the control mechanism.

Minimum Requirements for Safe Electrical Installations in Cotton Mills; *C. F. Hedlund* (*Associated Factory Mutual Fire Insurance Companies, Boston, Mass.*).

Fires occur more frequently in textile plants than in any other class of industry insured by the Associated Factory Mutual Fire Insurance Companies. Many of these fires are due to causes which are preventable, among which electricity is foremost.

Some of the rules of the present National Electrical Code pertaining to electrical installations in cotton mills are considered by many to be impractical, because the equipment that is now required where cotton fibres are present in appreciable amounts is too costly. The NEMA (National Electrical Manufacturer's Association) Type *9* enclosure which is required for control and protective equipment in linty areas is very expensive in comparison with the general purpose enclosure, consequently the latter is generally used and experience shows it is not suitable for most of the conditions. Obviously an enclosure is needed that will have some of the characteristics of the NEMA Type *9* enclosure, but it should not be much more expensive than the general purpose enclosure. It should be rugged enough to withstand the abuse that it is likely to receive and tight enough to prevent the infiltration of lint. The NEMA Type *1-A* semi-dust-tight enclosure is not much more expensive than the general purpose enclosure and it is of suitable design for most of the lint conditions but unfortunately it is not now commercially available for all types and sizes of switches and motor controllers used in linty areas.

The minimum requirements for safe electrical installations call for rigid metal conduit in heavy lint areas, such as in opener and picker rooms, card and dust rooms, cotton bins, lap storage areas, and so forth. Electric metallic tubing is permitted in other occupancies of moderate or light lint accumulations and the installation of wiring of any kind is discouraged in low, unsprinklered combustible basement areas.

Where there is considerable vibration, such as around looms, Type *SO* multiconductor flexible cord is advised with special water-tight connectors for the wiring between the controller and the motor.

Bus ducts should not be installed in opener and picker rooms, or in areas where lint is likely to accumulate inside the bus duct.

In linty areas motors of the totally enclosed type are preferred. For sizes larger than 15 horsepower, special textile type or enclosed pipe ventilated type are advised. Totally enclosed fan cooled motors are not recommended for use in linty areas. Open frame nonsparking induction motors are acceptable where lint accumulations are slight.

Enclosures for motor controllers, switches, fuses and circuit breakers, and similar spark producing equipment when installed in areas of moderate lint accumulations should be of the NEMA Type *1-A* semi-dust-tight type, or the equivalent. In heavy lint areas as in dust rooms, enclosures should be NEMA Type *5* or better.

Cord pendent lights should not be installed. Pipe pendent lighting fixtures and ceiling units are preferred. Fluorescent lights should have tight enclosures for the ballasts and in areas where the lint accumulations are severe should be equipped with glass covers. The reset type of starter should be used generally. Exposed incandescent lights should be provided with heavy glass globes where cotton lint and flyings are present and in cotton bins enclosed in dustproof fixtures, approved for Class II Group *G* locations.

Electric cranes and hoists supplied from bare overhead trolley conductors are permitted in cotton storage areas with special safeguards.

Ventilated dry type transformers are not permitted for use in any area where there are combustible lint and flyings present.

Stroboscope Analysis of Its Modern Automatic High-Speed Bobbin-Changing Dobby Loom; (*An industrial film, Crompton and Knowles Loom Works, Worcester, Mass.*).

The film represents the initial effort of Crompton and Knowles Loom Works with respect to education of mill personnel concerning the operation and function of various mechanical and electro-mechanical mechanisms of the *S-6* Automotic Bobbin-Changing Dobby Loom. It shows the action of various mechanisms that perform their operational cycles in but a fractional part of a second.

The particular type of automatic bobbin-changing dobby loom filmed (designated as *S-6*) was designed to meet the demands of the silk, rayon, acetate, and nylon trade.

Electric Power Applications in the Textile Industry

Copies of this publication, sponsored by the AIEE Committee on Industrial Power Applications, still are available. A consolidated reprint of four papers, this booklet covers certain aspects of the modern use of electric power in the textile industry such as electrification of the industry, power distribution, electric equipment, and electric drives.

Orders together with remittances of $0.80 per copy ($0.40 to AIEE members) should be sent to the AIEE Order Department, 33 West 39th Street, New York 18, N. Y.

The new 16-millimeter black-and-white 31-minute sound film opens with a full view of the *S-6* loom in operation. Then each major motion of the loom is covered. Construction and method of operation are shown and described.

Some excellent slow-motion sequences slow down such rapid operations as bobbin transfer, shuttle boxing, and so forth, so that the actual happenings may be observed in detail. The film describes and shows the operation of:

dobby, let-off, shuttle inserting filling in shed, bobbin magazine (two-cell), electric filling feeler, box motion, bobbin transfer, filling cutter, filling end remover, vacuum thread collector, center filling-stop motion, electric warp-stop motion, crankshaft connections at time of protection, bat-wing pick motion, operation of pickers at both ends of lay, parallel motion, and floating shuttle binder.

The 16-millimeter high-speed stroboscopic camera used in filming the slow-motion scenes was manufactured by Crompton and Knowles Loom Works. The speed range is from 240 to 1,200 frames per second. When operating at the maximum speed, 100 feet of film are exposed in approximately $3^{1}/_{2}$ seconds. When projected at the standard sound-film rate of 24 frames per second, the 100 feet of film shot at 1,200 frames per second will take approximately three minutes to view, or, in other words, 50 times slower than the action actually occurred. The slow-motion sequences of this film were shot at 480 frames per second, or a 20 to 1 reduction, a speed amply fast to permit study of any motion of the loom. The duration of flash is about six to eight microseconds, and the effective photographic exposure time is from two to four microseconds.

The camera is of the shutterless type—the shutter effect being derived from stroboscopic flash lamps which are controlled by a commutator attached to the film drive sprocket shaft, thereby synchronizing each individual frame with a flash of the stroboscopic lamp. In other words, when shooting at the rate of 480 frames per second, each stroboscopic lamp flashes 480 times per second—one flash for each frame that passes the aperture of the camera. Therefore, the extreme sharpness of each individual frame readily adapts the filmed sequence to frame by frame analysis as used in engineering studies. The 220-volt alternating-current input to the power pack is converted and applied to the stroboscopic flash lamp at 2,000–2,400 direct volts. The power pack has a 15-kw capacity, and can carry momentary loads up to 30 kw.

Officers and Committees for 1949–50

Officers

President

James F. Fairman	New York, N. Y.

(Term expires July 31, 1950)

Past Presidents

Blake D. Hull	Dallas, Tex.

(Term expires July 31, 1950)

Everett S. Lee	Schenectady, N. Y.

(Term expires July 31, 1951)

Vice-Presidents

District

1	Victor Siegfried	Worcester, Mass.
3	J. L. Callahan	New York, N. Y.
5	E. W. Seeger	Milwaukee, Wis.
7	G. N. Pingree	Dallas, Tex.
9	Richard McKay	Spokane, Wash.

(Terms expire July 31, 1950)

2	C. G. Veinott	Lima, Ohio
4	W. J. Seeley	Durham, N. C.
6	W. C. DuVall	Boulder, Colo.
8	Ralph A. Hopkins	Los Angeles, Calif.
10	A. H. Frampton	St. Catharines, Ont.

(Terms expire July 31, 1951)

Directors

R. T. Henry	Buffalo, N. Y.
E. P. Yerkes	Philadelphia, Pa.
W. J. Barrett	Newark, N. J.

(Terms expire July 31, 1950)

W. L. Everitt	Urbana, Ill.
A. C. Monteith	Pittsburgh, Pa.
Elgin B. Robertson	Dallas, Tex.

(Terms expire July 31, 1951)

C. W. Fick	Cleveland, Ohio
M. D. Hooven	Newark, N. J.
F. O. McMillan	Corvallis, Oreg.

(Terms expire July 31, 1952)

E. W. Davis	Cambridge, Mass.
N. B. Hinson	Los Angeles, Calif.
H. J. Scholz	Birmingham, Ala.

(Terms expire July 31, 1953)

Treasurer

W. I. Slichter	New York, N. Y.

(Term expires July 31, 1950)

Secretary

H. H. Henline	New York, N. Y.

(Term expires July 31, 1950)

Local Honorary Secretaries

AUSTRALIA—V. J. F. Brain, Electricity Authority of N.S.W., Box 2600 G.P.O., Sydney, New South Wales

BRAZIL—Richard H. Bowles, Sao Paulo Tramway Light and Power Company, Caixa Postal 26-B, Sao Paulo

ENGLAND—Sir A. P. M. Fleming, Metropolitan Vickers Electric Company, Trafford Park, Manchester 17

INDIA, NORTHERN—S. S. Kumar, P.W.D. Electricity Secretariat, Ellerslie, Simla-E, East Punjab

INDIA, SOUTHERN—S. M. Zubair, Tata Hydro Electric Company, Bombay House, Bruce Street, Fort Bombay

NEW ZEALAND—P. H. Powell, 130 Glandovey Road, Fendalton, Christchurch, N. W. 1

SWEDEN—Edy Velander, Box 5073, Stockholm 5

TRANSVAAL—Francis E. Ingham, Box 6067, Johannesburg, Transvaal, South Africa

General Committees

Executive

J. F. Fairman, *chairman*, Consolidated Edison Company of New York, Inc., 4 Irving Place, New York 3, N. Y.

J. L. Callahan	New York, N. Y.
W. L. Everitt	Urbana, Ill.
R. T. Henry	Buffalo, N. Y.
Everett S. Lee	Schenectady, N. Y.
W. I. Slichter	New York, N. Y.
E. P. Yerkes	Philadelphia, Pa.

Board of Examiners

E. D. Doyle, *chairman*, Leeds & Northrup Company, 4901 Stenton Ave., Philadelphia 44, Pa.

P. H. Adams, *vice-chairman*	Newark, N. J.
John J. Anderson, Jr., *secretary*	AIEE Headquarters
A. E. Anderson	Philadelphia, Pa.
R. W. Atkinson	Bayonne, N. J.
R. H. Barclay	New York, N. Y.
Robin Beach	Brooklyn, N. Y.
H. A. Dambly	Philadelphia, Pa.
E. W. Davis	Cambridge, Mass.
C. W. Franklin	New York, N. Y.
W. N. Goodwin, Jr.	Newark, N. J.
I. W. Gross	New York, N. Y.
N. S. Hibshman	Brooklyn, N. Y.
L. F. Hickernell	Hastings-on-Hudson, N. Y.
C. R. Jones	New York, N. Y.
I. F. Kinnard	West Lynn, Mass.
A. E. Knowlton	Short Beach, Conn.
C. M. Laffoon	East Pittsburgh, Pa.
Henry Logan	New York, N. Y.
L. G. Pacent	New York N. Y.
R. F. Penman	New York, N. Y.
J. J. Pilliod	New York, N. Y.
R. C. Roe	New York, N. Y.
F. J. Scudder	Manhasset, N. Y.
George Sutherland	New York, N. Y.
Gordon Thompson	New York, N. Y.
H. M. Trueblood	Dobbs Ferry, N. Y.
S. S. Watkins	New York, N. Y.
H. H. Weber	New York, N. Y.
John Westbye	New York, N. Y.
Sidney Withington	New Haven, Conn.

Constitution and By-Laws

N. B. Hinson, *chairman*, Southern California Edison Company, Edison Building, Los Angeles 53, Calif.

F. M. Farmer	New York, N. Y.
W. Scott Hill	Baltimore, Md.
W. W. Lewis	Schenectady, N. Y.
W. S. Peterson	Los Angeles, Calif.
Walter C. Smith	Palo Alto, Calif.

Finance

E. P. Yerkes, *chairman*, Bell Telephone Company of Pennsylvania, 1401 Arch Street, Philadelphia 2, Pa.

W. J. Barrett,	Newark, N. J.
R. T. Henry	Buffalo, N. Y.
H. J. Scholz	Birmingham, Ala.
Victor Siegfried	Worcester, Mass.

Headquarters

C. S. Purnell, *chairman*, Westinghouse Electric Corporation, 40 Wall Street, New York 5, N. Y.

H. H. Henline	New York, N. Y.
H. H. Race	Schenectady, N. Y.
E. P. Yerkes	Philadelphia, Pa.

Members-for-Life Fund

C R. Beardsley, *chairman*, Consolidated Edison Company of New York, Inc., 4 Irving Place, New York 3, N. Y.

T. F. Barton	New York, N. Y.
N. E. Funk	Philadelphia, Pa.
A. H. Hull	Toronto, Ontario, Canada
E. H. Martindale	Cleveland, Ohio
F. D. Newbury	Pittsburgh, Pa.
W. I. Slichter	New York, N. Y.
R. W. Sorensen	Pasadena, Calif.
J. F. Tritle	Erie, Pa.

Membership

F. S. Black, *chairman*, *Electrical World*, 330 West 42 Street, New York 18, N. Y.

J. C. Woods, *vice-chairman*	Chicago, Ill.
F. A. Norris, *secretary*	AIEE Headquarters
C. H. Cutter	Seattle, Wash.
J. A. Duncan, Jr.	New York, N. Y.
C. W. Fick	Cleveland, Ohio
H. R. Heckendorn	Chicago, Ill.
R. C. Horn	St. Louis, Mo.
Thomas Ingledow	Vancouver, British Columbia, Canada
F. H. Knapp	Cleveland, Ohio
M. J. Lantz	Portland, Oreg.
W. Stone Leake	New Orleans, La.
E. W. Morris	Los Angeles, Calif.
H. N. Muller, Jr.	East Pittsburgh, Pa.
C. G. Rumohr	Denver, Colo.
A. M. Spaulding	Denver, Colo.

District Vice-Chairmen

W. C. Bloomquist (1)	Schenectady, N. Y.
M. L. Lehman (2)	Philadelphia, Pa.
Charles Clos (3)	New York, N. Y.
J. D. Harper (4)	Alcoa, Tenn.
H. M. Craig (5)	Detroit, Mich.
A. S. Anderson (6)	Denver, Colo.
E. W. Allen (7)	Oklahoma City, Okla.
P. L. Savage (8)	Los Angeles, Calif.
C. R. Kingsbury (9)	Seattle, Wash.
C. L. Roach (10)	Montreal, Quebec, Canada

Ex-officio

Chairmen of membership committees of Sections

Planning and Co-ordination

M. D. Hooven, *chairman*, Public Service Electric and Gas Company, 80 Park Place, Newark 1, N. J.

D. I. Anzini	San Francisco, Calif.
W. R. G. Baker	Syracuse, N. Y.
G. W. Bower	Haddonfield, N. J.
H. C. Coleman	East Pittsburgh, Pa.
F. E. Harrell	Cleveland, Ohio
L. F. Hickernell	Hastings-on-Hudson, N. Y.
N. B. Hinson	Los Angeles, Calif.
T. G. LeClair	Chicago, Ill.
Everett S. Lee	Schenectady, N. Y.
K. B. McEachron	Pittsfield, Mass.
J. R. North	Jackson, Mich.
J. J. Orr	New York, N. Y.
Elgin B. Robertson	Dallas, Tex.
H. I. Romnes	New York, N. Y.
M. J. Steinberg	New York, N. Y.
J. D. Tebo	New York, N. Y.
C. H. Willis	Princeton, N. J.
E. P. Yerkes	Philadelphia, Pa.

Publication

K. B. McEachron, *chairman*, General Electric Company, 100 Woodlawn Ave., Pittsfield, Mass.

F. R. Benedict	Pittsburgh, Pa.
J. M Flanigen	Atlanta, Ga.
P. B. Garrett	Chicago, Ill.
H. H. Henline	New York, N. Y.
R. K. Honaman	New York, N. Y.
B. M. Jones	Pittsburgh, Pa.
F. O. McMillan	Corvallis, Oreg.
G. C. Quinn	Milwaukee, Wis.
B. R. Teare, Jr.	Pittsburgh, Pa.
G. C. Tenney	San Francisco, Calif.
C. H. Willis	Princeton, N. J.

Public Relations

R. K. Honaman, *chairman*, Bell Telephone Laboratories, Inc., 463 West Street, New York 14, N. Y.

G. T. Minasian, *vice-chairman*	New York, N. Y.
Guy Bartlett	Schenectady, N. Y.
G. W. Bower	Haddonfield, N. J.
M. Getting	Pittsburgh, Pa.
H. H. Henline	New York, N. Y.
A. E. Knowlton	Short Beach, Conn.
H. W. Marquardt	New York, N. Y.
K. B. McEachron	Pittsfield, Mass.
H. J. Scholz	Birmingham, Ala.
D. W. Taylor	Newark, N. J.
C. H. Willis	Princeton, N. J.

Research

M. J. Kelley, *chairman*, Bell Telephone Laboratories, Inc., 463 West Street, New York 14, N. Y.

J. A. Hutcheson, *vice-chairman*	East Pittsburgh, Pa.
M. B. Long, *secretary*	Murray Hill, N. J.
B. G. Ballard	Ottawa, Ontario, Canada
J. W. Barker	New York, N. Y.
R. D. Bennett	Silver Spring, Md.
L. V. Berkner	Washington, D. C.
E. W. Boehne	Cambridge, Mass.
Cledo Brunetti	Stanford, Calif.
C. R. Burrows	Ithaca, N. Y.
A. G. Conrad	New Haven, Conn.
H. P. Corwith	New York, N. Y.
H. E. Edgerton	Cambridge, Mass.
W. L. Everitt	Urbana, Ill.
R. S. Glasgow	Annapolis, Md.
T. A. Hopkins	Peoria, Ill.
T. J. Killian	Washington, D. C.
J. T. Littleton	Corning, N. Y.
A. D. Moore	Ann Arbor, Mich.
B. K. Northrop	Ithaca, N. Y.
W. H. Pickering	Pasadena, Calif.
C. S. Schifreen	Philadelphia, Pa.
C. G. Suits	Schenectady, N. Y.
J. B. Thomas	Fort Worth, Tex.
Eric Walker	State College, Pa.
V. K. Zworykin	Princeton, N. J.

Safety

W. B. Kouwenhoven, *chairman*, The Johns Hopkins University, Baltimore 18, Md.

M. M. Brandon, *vice-chairman* and *secretary*	New York, N. Y.
Robin Beach	Brooklyn, N. Y.
J. H. Berry	Norfolk, Va.
Hendley Blackmon	New York, N. Y.
W. B. Buchanan	Toronto, Ontario, Canada
C. F. Dalziel	Berkeley, Calif.
G. S. Diehl	Lancaster, Pa.
W. P. Dobson	Toronto, Ontario, Canada
J. P. Ferguson	Los Angeles, Calif.
L. P. Ferris	New York, N. Y.
J. M. Flanigen	Atlanta, Ga.
J. A. Gienger	Rochester, N. Y.
M. C. Goodspeed	Harborcreek, Pa.
Floyd Goss	Los Angeles, Calif.
N. B. Hinson	Los Angeles, Calif.
O. S. Hockaday	Fort Worth, Tex.
J. O. Leslie	Reading, Pa.
R. L. Lloyd	Washington, D. C.
Albrecht Naeter	Stillwater, Okla.
G. R. Radley	Milwaukee, Wis.
C. N. Rakestraw	Cleveland, Ohio
P. X. Rice	State College, Pa.
W. T. Rogers	New York, N. Y.
A. H. Schirmer	New York, N. Y.
A. B. Smith	New York, N. Y.
W. R. Smith	Newark, N. J.
E. E. Turkington	Boston, Mass.
H. H. Watson	Bridgeport, Conn.
H. B Williams	New York, N. Y.
William R. Wood	Windber, Pa.

Medical Consultants

Dr. Anna Baetijer, The Johns Hopkins University, Baltimore, Md.

Dr. Cecil K. Drinker, Harvard University, Cambridge, Mass.

Dr. T. L. Hazlett, Westinghouse Electric Corporation, Pittsburgh, Pa.

Dr. B. L. Vosburgh, General Electric Company, Schenectady, N. Y.

Sections

D. I. Anzini, *chairman*, General Electric Company, 806 Russ Building, San Francisco 4, Calif.

C. S. Purnell, *vice-chairman* (East)	New York, N. Y.
Walter C. Smith, *vice-chairman* (West)	Palo Alto, Calif.
F. S. Benson, *secretary*	San Francisco, Calif.
W. J. Barrett	Newark, N. J.
F. S. Black	New York, N. Y.
G. W. Bower	Haddonfield, N.J.
T. C. D. Churchill	Toronto, Ontario, Canada
Bradley Cozzens	Los Angeles, Calif.
H. A. Dambly	Philadelphia, Pa.
O. R. Enriquez	Mexico, D.F., Mexico
C. W. Fick	Cleveland, Ohio
R. C. Horn	St. Louis, Mo.
R. E. Kistler	Seattle, Wash.
C. P. Knost	New Orleans, La.
C. W. Lethert	Minneapolis, Minn.
A. L. O'Banion	Boston, Mass.
L. R. Patterson	Denver, Colo.
F. H. Pumphrey	Gainesville, Fla.
R. V. Shepherd	Schenectady, N. Y.
E. W. Stone	Peoria, Ill.
J. C. Strasbourger	Cleveland, Ohio
H. H. Wagner	Canonsburg, Pa.

Ex-officio

Chairmen of Sections

Standards

F. E. Harrell, *chairman*, Reliance Electric and Engineering Company, 1088 Ivanhoe Road, Cleveland 10, Ohio
E. B. Paxton, *vice-chairman* Schenectady, N. Y.
John J. Anderson, Jr., *secretary* AIEE Headquarters
Joseph Wm. Allen Teterboro, N. J.
R. W. Atkinson Bayonne, N. J.
E. L. Bailey Highland Park, Mich.
Sterling Beckwith Milwaukee, Wis.
F. R. Benedict Pittsburgh, Pa.
R. C. Bergvall East Pittsburgh, Pa.
M. M. Brandon New York, N. Y.
J. E. Clem Schenectady, N. Y.
C. L. Dawes Cambridge, Mass.
R. D. de Kay New York, N. Y.
W. P. Dobson Toronto, Ontario, Canada
C. N. Gilt New York, N. Y.
I. W. Gross New York, N. Y.
John Grotzinger Akron, Ohio
R. T. Henry Buffalo, N. Y.
H. R. Huntley New York, N. Y.
H. E. Kent New York, N. Y.
A. C. Muir Philadelphia, Pa.
J. R. North Jackson, Mich.
J. E. O'Brien Washington, D. C.
G. H. O'Sullivan New York, N. Y.
F. B. Silsbee Washington, D. C.

Ex-officio

Chairmen of Standards subcommittees and co-ordinating committees
Chairmen of AIEE technical committees
Chairmen of AIEE delegations on other standardizing bodies or sole representative thereon
President, U. S. National Committee of the International Electrotechnical Commission
President, Canadian National Committee of the International Electrotechnical Commission

Technical Program

C. H. Willis, *chairman*, Princeton University, Princeton, N. J.
M. M. Brandon, *vice-chairman* New York, N. Y.
Edward C. Day, *secretary* AIEE Headquarters
J. L. Callahan New York, N. Y.
P. H. Light Schenectady, N. Y.
F. O. McMillan Corvallis, Oreg.
Robert D. Miller San Francisco, Calif.
S. H. Mortensen Milwaukee, Wis.
M. J. Steinberg New York, N. Y.
Frank Thornton, Jr. East Pittsburgh, Pa.
H. M. Turner New Haven, Conn.

Ex-officio

Chairmen of:
- Technical co-ordinating committees
- Technical committees
- Committee on Education
- Committee on Planning and Co-ordination
- Committee on Research
- Committee on Safety
- Standards Committee

Transfers

F. W. Willcutt, *chairman*, Potomac Electric Power Company, 10th & E Streets, N. W., Washington 4, D. C.
F. A. Cooper St. Louis, Mo.
O. A. Demuth Portland, Oreg.
C. W. Fick Cleveland, Ohio
John Gammell Philadelphia, Pa.
J. D. Harper Alcoa, Tenn.
W. R. Hough Cleveland, Ohio
L. F. Hunt Los Angeles, Calif.
M. M. Moore Washington, D. C.
L. R. Patterson Denver, Colo.
F. H. Pumphrey Gainesville, Fla.
John Wm. Robinson San Francisco, Calif.
H. K. Smith Chicago, Ill.
H. B. Wood Boston, Mass.

Ex-officio

Chairmen of transfers committees of Sections

Professional Group Committees

Professional Group Co-ordinating

T. G. LeClair, *chairman*, Commonwealth Edison Company, 72 West Adams Street, Chicago 90, Ill.
W. Scott Hill
Chairmen of professional group committees

Alessandro Volta Memorial Fund—Trustees

W. L. Everitt Urbana, Ill.
(Term expires July 31, 1951)
C. A. Powel East Pittsburgh, Pa.
(Term expires July 31, 1953)
H. S. Osborne, *chairman* New York, N. Y.
(Term expires July 31, 1955)

Charles LeGeyt Fortescue Fellowship

H. N. Muller, Jr., *chairman* East Pittsburgh, Pa.
H. P. Sedwick Chicago, Ill.
(Terms expire July 31, 1950)
J. W. Barker New York, N. Y.
R. I. Wilkinson New York, N. Y.
(Terms expire July 31, 1951)
F. W. Bush Milwaukee, Wis.
A. G. Conrad New Haven, Conn.
(Terms expire July 31, 1952)

Code of Principles of Professional Conduct

Harry Barker, *chairman*, Barker and Wheeler, 11 Park Place, New York 7, N. Y.
P. L. Alger Schenectady, N. Y.
D. D. Ewing Lafayette, Ind.
E. S. Fields Cincinnati, Ohio
E. H. Flath Dallas, Tex.
Harold Goodwin, Jr. Wyncote, Pa.
Dugald C. Jackson Cambridge, Mass.
R. D. Maxson Chicago, Ill.
R. W. Sorensen Pasadena, Calif.

Edison Medal

Appointed by the President for term of five years

C. V. Christie Montreal, Quebec, Canada
Zay Jeffries Pittsfield, Mass.
Harold Pender Philadelphia, Pa.
(Terms expire July 31, 1950)
C. A. Corney Boston, Mass.
J. R. North Jackson, Mich.
I. M. Stein Philadelphia, Pa.
(Terms expire July 31, 1951)
Marvin W. Smith Philadelphia, Pa.
H. S. Osborne New York, N. Y.
H. A. Winne Schenectady, N. Y.
(Terms expire July 31, 1952)
D. I. Cone San Francisco, Calif.
J. B. MacNeill, *chairman* East Pittsburgh, Pa.
Philip Sporn New York, N. Y.
(Terms expire July 31, 1953)
J. L. Callahan New York, N. Y.
J. M. Flanigen Atlanta, Ga.
R. I. Wilkinson New York, N. Y.
(Terms expire July 31, 1954)

Elected by the Board of Directors from its own membership for term of two years

R. T. Henry Buffalo, N. Y.
M. D. Hooven Newark, N. J.
Victor Siegfried Worcester, Mass.
(Terms expire July 31, 1950)
W. L. Everitt Urbana, Ill.
A. H. Frampton St. Catharines, Ontario, Canada
A. C. Monteith Pittsburgh, Pa.
(Terms expire July 31, 1951)

Ex-officio

James F. Fairman, president New York, N. Y.
W. I. Slichter, treasurer New York, N. Y.
H. H. Henline, secretary New York, N. Y.

Education

B. R. Teare, Jr., *chairman*, Carnegie Institute of Technology, Pittsburgh, Pa.
R. D. Bennett Silver Spring, Md.
R. L. Biesele Dallas, Tex.
D. S. Bridgman New York, N. Y.
E. E. Dreese Columbus, Ohio
W. L. Everitt Urbana, Ill.
A. W. Friend Princeton, N. J.
H. E. Hartig Minneapolis, Minn.
A. R. Hellwarth Detroit, Mich.
T. G. LeClair Chicago, Ill.
T. C. Lloyd Springfield, Ohio
A. H. Lovell Ann Arbor, Mich.
K. B. McEachron, Jr. Schenectady, N. Y.
H. N. Muller, Jr. East Pittsburgh, Pa.
J. A. Northcott, Jr. Notre Dame, Ind.
R. C. Putnam Cleveland, Ohio
Walther Richter West Allis, Wis.
J. D. Ryder Ames, Iowa
E. M. Strong Ithaca, N. Y.
G. F. Tracy Toronto, Ontario, Canada
C. E. Tucker Cambridge, Mass.
E. A. Walker State College, Pa.
M. L. Waring New York, N. Y.
S. Reid Warren, Jr. Philadelphia, Pa.

Lamme Medal

F. E. Harrell Cleveland, Ohio
D. A. Quarles New York, N. Y.
J. B. Thomas, *chairman* Fort Worth, Tex.
(Terms expire July 31, 1950)
J. H. Berry Norfolk, Va.
T. H. Morgan Worcester, Mass.
L. A. Umansky Schenectady, N. Y.
(Terms expire July 31, 1951)
C. B. Jolliffe Princeton, N. J.
A. H. Kehoe New York, N. Y.
J. B. MacNeill East Pittsburgh, Pa.
(Terms expire July 31, 1952)

Management

A. C. Monteith, *chairman*, Westinghouse Electric Corporation, 306 Fourth Avenue, Pittsburgh 30, Pa.
P. L. Alger Schenectady, N. Y.
K. P. Applegate Hartford, Conn.
C. J. Beller Cleveland, Ohio
R. D. Bennett Silver Spring, Md.
H. K. Breckenridge Pittsburgh, Pa.
F. W. Bush Milwaukee, Wis.
W. L. Cisler Detroit, Mich.
E. E. Hill New York, N. Y.
E. L. Moreland Boston, Mass.
H. A. Peterson New York, N. Y.
D. A. Quarles New York, N. Y.
F. M. Roberts Schenectady, N. Y.
D. D. Smalley San Francisco, Calif.
O. Van Rye Boston, Mass.

Prizes, Award of Institute

C. H. Willis, *chairman*, Princeton University, Princeton, N. J.
D. I. Anzini San Francisco, Calif.
H. C. Coleman East Pittsburgh, Pa.
H. L. Davis, Jr. Philadelphia, Pa.
L. F. Hickernell Hastings-on-Hudson, N. Y.
W. C. Kalb Cleveland, Ohio
M. J. Kelly New York, N. Y.
T. G. LeClair Chicago, Ill.
K. B. McEachron Pittsfield, Mass.
F. O. McMillan Corvallis, Oreg.
J. J. Orr New York, N. Y.
H. I. Romnes New York, N. Y.
F. M. Sebast Troy, N. Y.
J. D. Tebo New York, N. Y.
H. M. Turner New Haven, Conn.

Registration of Engineers

Elgin B. Robertson, *chairman*, P. O. Box 745, Dallas 1, Tex.
E. H. Bancker Schenectady, N. Y.
L. H. Cleary Washington, D. C.
J. M. Flanigen Atlanta, Ga.
J. H. Foote Jackson, Mich.
N. L. Freeman Schenectady, N. Y.
J. E. Hobson Stanford, Calif.
J. T. Hood Tacoma, Wash.
K. B. McEachron Pittsfield, Mass.
E. W. Oesterreich Pittsburgh, Pa.
William W. Perry Binghamton, N. Y.
L. M. Robertson Denver, Colo.
E. W. Seeger Milwaukee, Wis.
R. W. Sorensen Pasadena, Calif.
P. G. Wallace Dallas, Tex.
R. G. Warner New Haven, Conn.
E. R. Whitehead Brookfield, Ill.

Student Branches

F. O. McMillan, *chairman*, Oregon State College, Corvallis, Oreg.
Sterling Beckwith Milwaukee, Wis.
R. A. Galbraithe Syracuse, N. Y.
J. H. Kuhlmann Minneapolis, Minn.
H. N. Muller, Jr. East Pittsburgh, Pa.
R. G. Porter Boston, Mass.
L. T. Rader Schenectady, N. Y.
E. A. Reid Urbana, Ill.
E. W. Spring Detroit, Mich.
F. W. Tatum Dallas, Tex.
W. G. Warren Santa Clara, Calif.
B. S. Willis Ames, Iowa

Ex-officio

Counselors of Student Branches

Technical Committees

Communication Group

Communication Co-ordinating Committee

H. I. Romnes, *chairman;* American Telephone and Telegraph Company, 195 Broadway, New York 7, N. Y.
F. B. Bramhall, *vice-chairman* New York, N. Y.
A. J. Busch, *secretary* New York, N. Y.

Members-at-Large

J. L. Callahan, representing Board of Directors New York, N. Y.
Rothwell E. Smith New York, N. Y.

Ex-officio members

Chairmen of the technical committees in the Communication Group

Aural Broadcasting Systems

E. G. Ports, *chairman;* Federal Telephone and Radio Corporation, 100 Kingsland Road, Clifton, N. J.
J. L. Middlebrooks, *vice-chairman* New York, N. Y.
M. L. Levy, *secretary* New York, N. Y.
T. M. Bloomer Baltimore, Md.
L. E. Closson Philadelphia, Pa.
E. W. Davis New York, N. Y.
C. E. Dean Little Neck, N. Y.
P. G. Edwards New York, N. Y.
L. K. Findley Cedar Rapids, Iowa
J. C. Gaudio Chicago, Ill.
R. W. Masters Columbus, Ohio
Gerard Mountjoy Rochester, N. Y.
R. M. Sprague Waltham, Mass.
J. K. Tyler Sunbury, Pa.
R. H. Williamson Syracuse, N. Y.

Communication Switching Systems

R. C. Davis, *chairman;* Bell Telephone Laboratories, Inc., 463 West Street, New York 14, N. Y.
J. Meszar, *vice-chairman* New York, N. Y.
A. E. Frost, *secretary* New York, N. Y.
L. L. Burns Dallas, Tex.
D. G. Geiger Toronto, Ontario, Canada
G. H. Gray New York, N. Y.
C. F. Lynch Poughkeepsie, N. Y.
A. B. Smith Chicago, Ill.
D. L. Solomon Rochester, N. Y.
W. G. Storey Chicago, Ill.
C. M. Tomlinson Philadelphia, Pa.

Radio Communication Systems

G. T. Royden, *chairman;* MacKay Radio and Telegraph Company, 67 Broad Street, New York 4, N. Y.
E. D. Becken, *vice-chairman* New York, N. Y.
A. C. Dickieson, *secretary* New York, N. Y.
C. M. Backer Clifton, N. J.
E. H. B. Bartelink New York, N. Y.
I. F. Byrnes New York, N. Y.
F. H. Cusack New York, N. Y.
D. D. Grieg Nutley, N. J.
G. R. Messmer Washington, D. C.

Special Communication Applications

E. W. Kenefake, *chairman;* Electronics Department, General Electric Company, Syracuse, N. Y.
L. A. Smith, *vice-chairman* New York, N. Y.
L. C. Holmes, *secretary* Rochester, N. Y.
S. C. Bartlett New York, N. Y.
G. W. Baughman Swissvale, Pa.
I. F. Byrnes New York, N. Y.
Melville Eastham Cambridge, Mass
W. D. Hailes Rochester, N. Y.
L. E. Kearney New York, N. Y.
R. H. Kline Baltimore, Md.
Newton Monk New York, N. Y.
W. A. Ready Malden, Mass.
H. H. Spencer Camden, N. J.
R. B. Vaile, Jr. Stanford, Calif.
A. J. Warner Nutley, N. J.

Telegraph Systems

I. S. Coggeshall, *chairman;* Western Union Telegraph Company, 60 Hudson Street, New York 13, N. Y.
J. A. Duncan, Jr., *vice-chairman* New York, N. Y.
E. C. Chamberlain, *secretary* New York, N. Y.
E. P. Bancroft New York, N. Y.

W. G. H. Finch	New York, N. Y.
H. H. Haglund	New York, N. Y.
Grosvenor Hotchkiss	New York, N. Y.
Alfred Kahn	New York, N. Y.
R. E. Mathes	Hartford, Conn.
R. B. Steele	Toronto, Ontario, Canada
E. F. Watson	New York, N. Y.
G. B. Worthen	New York, N. Y.

Television Broadcasting Systems

J. B. Coleman, *chairman;* Radio Corporation of America, RCA Victor Division, Camden, N. J.

L. G. Cumming, *vice-chairman*	New York, N. Y.
L. M. Rodgers, *secretary*	Philadelphia, Pa.
G. H. Brown	Princeton, N. J.
D. G. Fink	New York, N. Y.
J. C. Gaudio	Chicago, Ill.
P. C. Goldmark	New York, N. Y.
T. T. Goldsmith, Jr.	Passaic, N. J.
W. R. Hewlett	Palo Alto, Calif.
E. M. Johnson	New York, N. Y.
I. J. Karr	Syracuse, N. Y.
W. L. Lawrence	Camden, N. J.
G. M. Nixon	New York, N. Y.
D. W. Pugsley	Syracuse, N. Y.
F. M. Rives	Syracuse, N. Y.
R. E. Shelby	New York, N. Y.
S. C. Spielman	Philadelphia, Pa.
V. E. Trouant	Camden, N. J.
N. H. Young	Nutley, N. J.

Wire Communication Systems

H. A. Affel, *chairman;* Bell Telephone Laboratories, Inc., 463 West Street, New York 14, N. Y.

G. B. Ransom, *vice-chairman*	New York, N. Y.
L. G. Abraham, *secretary*	New York, N. Y.
A. L. Albert	Corvallis, Oreg.
W. M. Allen	Portland, Oreg.
E. H. B. Bartelink	New York, N. Y.
J. D. Booth	Baltimore, Md.
Hezzie Clark	Houston, Tex.
A. B. Credle	Mineola, N. Y.
G. E. Dodrill	Washington, D. C.
H. E. Ellithorn	Notre Dame, Ind.
L. G. Erickson	San Carlos, Calif.
G. H. Gray	New York, N. Y.
W. D. Hailes	Rochester, N. Y.
E. B. Harmon	Denver, Colo.
H. R. Hunkins	Clifton, N. J.
R. R. O'Connor	Chicago, Ill.
F. M. Rives	Syracuse, N. Y.
A. L. Rumsey	Albany, N. Y.
J. O'D. Shepherd	Atlanta, Ga.
Arthur Bessey Smith	Chicago, Ill.
W. T. Smith	New York, N. Y.

Industry Group

Industry Co-ordinating Committee

J. J. Orr, *chairman;* United States Rubber Company, 1230 Avenue of the Americas, New York 20, N. Y.

T. R. Rhea, *vice-chairman*	Schenectady, N. Y.
R. S. Gardner, *secretary*	New York, N. Y.

Member-at-Large

Victor Siegfried, representing Board of Directors Worcester, Mass.

Ex-officio members

Chairmen of the technical committees in the Industry Co-ordinating Group

Chemical, Electrochemical, and Electrothermal Applications

F. R. Benedict, *chairman;* Industry Engineering Department, Westinghouse Electric Corporation, East Pittsburgh, Pa.

Leroy W. Roush, *vice-chairman*	South Charleston, W. Va.
F. V. Andreae	Chattanooga, Tenn.
F. T. Bowditch	Cleveland, Ohio
J. D. Branch	Houston, Tex.
A. B. Campbell	Houston, Tex.
W. H. Dickinson	Elizabeth, N. J.
W. C. Dreyer	Houston, Tex.
Felix S. Glaza	Freeport, Tex.
L. M. Goldsmith	Philadelphia, Pa.
W. E. Gutzwiller	Milwaukee, Wis.
E. A. Hanff	Pittsburgh, Pa.
J. D. Harper	Alcoa, Tenn.
T. G. Hieronymus	Kansas City, Mo.
J. E. Hobson	Stanford, Calif.
H. E. Houck	Wilmington, Del.
J. D. Huntsberger	Langhorne, Pa.
M. A. Hyde, Jr.	Pittsburgh, Pa.
Rollin Kennard	Great Falls, Mont.
R. J. Kuhn	New Orleans, La.
E. H. Lamberger	East Pittsburgh, Pa.
D. H. Levy	Dallas, Tex.
J. J. Loustaunau	Boston, Mass.
J. A. McLellan	Linden, N. J.
G. H. Orcutt	Wyandotte, Mich.
Waldo Porter	Vancouver, Wash.
R. L. Rayner	Detroit, Mich.
T. R. Rhea	Schenectady, N. Y.
H. C. Riggs	Philadelphia, Pa.
G. B. Scheer	Oakland, Calif.
E. H. Scheick	New York, N. Y.
H. P. Sherer	Cleveland, Ohio
E. O. Scott	Welland, Ontario, Canada
Joel Tompkins	Massena, N. Y.
J. J. Unger	Cleveland, Ohio
G. W. Vinal	Washington, D. C.
H. W. Wahlquist	New York, N. Y.
H. H. Zielinski	Schenectady, N. Y.

Electric Heating

J. C. Handy, *chairman;* Consolidated Gas, Electric Light and Power Company, Lexington Building, Baltimore, Md.

P. H. Goodell, *vice-chairman*	Detroit, Mich.
L. M. Duryee, *secretary*	Waterbury, Conn.
E. L. Bailey	Highland Park, Mich.
R. M. Baker	Baltimore, Md.
E. H. Browning	East Pittsburgh, Pa.
Harold Bunte	Chicago, Ill.
F. T. Chesnut	Trenton, N. J.
R. H. Ellis	Pittsburgh, Pa.
E. M. Guyer	Corning, N. Y.
L. P. Hynes	Haddonfield, N. J.
T. P. Kinn	Baltimore, Md.
G. F. Leland	Schenectady, N. Y.
W. H. Meyer	Toronto, Ontario, Canada
A. E. Opdenweyer	Portland, Oreg.
C. E. Peck	Meadville, Pa.
Kennard Pinder	Wilmington, Del.
W. C. Rudd	Brooklyn, N. Y.
E. H. Scheick	New York, N. Y.
E. A. Schmotzer	Cleveland, Ohio
W. R. Schofield	Philadelphia, Pa.
G. W. Scott, Jr.	Lancaster, Pa.
G. S. Smith	Seattle, Wash.
T. H. Story	Camden, N. J.
J. T. Thwaites	Hamilton, Ontario, Canada
G. E. Walters	Peoria, Ill.
H. R. Winemiller	Chicago, Ill.

Electric Welding

Myron Zucker, *chairman;* Myron Zucker Engineering Company, 1708 Crooks Road, Royal Oak, Mich.

R. C. McMaster, *vice-chairman*	Columbus, Ohio
R. S. Gardner, *secretary*	New York, N. Y.
J. H. Blankenbuehler	Troy, Ohio
W. G. Bostwick	Cincinnati, Ohio
G. M. Chute	Detroit, Mich.
C. N. Clark	Pittsburgh, Pa.
J. F. Deffenbaugh	Warren, Ohio
D. D. Douglass	Oakland, Calif.
R. C. Freeman	Fitchburg, Mass.
G. W. Garman	Schenectady, N. Y.
J. W. Gore	Baltimore, Md.
E. M. Guyer	Corning, N. Y.
W. B. Kouwenhoven	Baltimore, Md.
E. J. Limpel	Milwaukee, Wis.
S. W. Luther	Detroit, Mich.
R. S. Phair	Philadelphia, Pa.
C. M. Rhoades, Jr.	Schenectady, N. Y.
M. S. Shane	Cleveland, Ohio
C. E. Smith	Warren, Ohio
H. W. Snyder	Bozeman, Mont.
C. B. Stadum	Buffalo, N. Y.
H. I. Stanback	Milwaukee, Wis.
E. F. Steinert	Buffalo, N. Y.
G. I. F. Theriault	Dayton, Ohio
H. W. Tietze	Newark, N. J.
L. P. Winsor	Troy, N. Y.
B. L. Wise	Bay City, Mich.

General Industry Applications

Kennard Pinder, *chairman;* E. I. du Pont de Nemours and Company, 10th and Market Streets, Wilmington, Del.

J. C. Fink, *vice-chairman*	East Pittsburgh, Pa.
V. O. Johnson, *secretary*	New York, N. Y.
B. T. Anderson	Rockford, Ill.
A. T. Bacheler	East Pittsburgh, Pa.
V. B. Baker	East Pittsburgh, Pa.
E. L. Blankenbeker	Pittsburgh, Pa.
S. A. Bobe	Atlanta, Ga.
J. M. Delfs	Schenectady, N. Y.
M. A. De Ferranti	Schenectady, N. Y.
R. J. DeMartini	Schenectady, N. Y.
A. W. Frankenfield	Wilmington, Del.
John Gammell	Philadelphia, Pa.
E. M. Hays	Pittsburgh, Pa.
L. W. Herchenroeder	East Pittsburgh, Pa.
K. W. John	Detroit, Mich.
G. W. Knapp	Schenectady, N. Y.
A. F. Lukens	Lynn, Mass.
H. B. Mathieu	Pampa, Tex.
E. F. Mekelburg	Milwaukee, Wis.
J. F. Moore	Toronto, Ontario, Canada
E. K. Murphy	New York, N. Y.
D. R. Percival	Worcester, Mass.
G. E. Plaisted	San Francisco, Calif.
M. L. Platt	Binghamton, N. Y.
H. A. Rose	Seattle, Wash.
R. G. Rudrow	Wilmington, Del.
H. L. Smith	New York, N. Y.
R. H. Smith	Cleveland, Ohio
F. D. Snyder	Boston, Mass.
R. F. Snyder	Akron, Ohio
Ray Stroppel	Cincinnati, Ohio
J. A. Tudor	Portland, Oreg.
H. C. Uhl	Sylacauga, Ala.
L. A. Umansky	Schenectady, N. Y.

Industrial Control

G. W. Heumann, *chairman;* Control Engineering Division, General Electric Company, Schenectady 5, N. Y.

J. A. Cortelli, *vice-chairman*	Cleveland, Ohio
H. L. Palmer, *secretary*	Schenectady, N. Y.
E. H. Alexander	Schenectady, N. Y.
H. H. Angel	Bethlehem, Pa.
John Baird	Madison, Wis.
T. H. Bloodworth	Milwaukee, Wis.
G. S. Brown	Cambridge, Mass.
L. J. Conover	Easton, Pa.
W. H. Elliot	Milwaukee, Wis.
C. T. Evans	Milwaukee, Wis.
J. E. Gahagan	Binghamton, N. Y.
J. A. Gienger	Rochester, N. Y.
F. Y. Grepe	Toronto, Ontario, Canada
K. W. John	Detroit, Mich.
R. W. Jones	Evanston, Ill.
J. D. Leitch	Cleveland, Ohio
E. F. Mekelburg	Milwaukee, Wis.
E. E. Moyer	Troy, N. Y.
J. J. O'Connor	New York, N. Y.
J. W. Picking	Cleveland, Ohio
J. E. Ryan	Schenectady, N. Y.
F. E. Strauss	Oakland, Calif.
E. H. Vedder	Buffalo, N. Y.

Industrial Power Systems

J. S. Gault, *chairman;* Electrical Engineering Department, University of Michigan, Ann Arbor, Mich.

H. G. Barnett, *vice-chairman*	East Pittsburgh, Pa.
S. A. Warner, *secretary*	New York, N. Y.
D. L. Beeman	Schenectady, N. Y.
E. S. Dibble	Los Angeles, Calif.
Leo Dolkart	Chicago, Ill.
D. D. Douglass	Oakland, Calif.
Felix Glaza	Freeport, Tex.
W. S. Gordon, Jr.	Tacoma, Wash.
C. R. Johnson	New York, N. Y.
R. E. Johnson	Rockford, Ill.
C. M. Lathrop	Elizabeth, N. J.
M. C. Mapes	New Haven, Conn.
A. E. Marshall	St. Louis, Mo.
J. L. McKeever	Peterboro, Ontario, Canada
J. S. Morgan	Milwaukee, Wis.
W. A. Mosteller	Detroit, Mich.
J. S. Parsons	East Pittsburgh, Pa.
Dick Ray	Tulsa, Okla.
W. H. Rollman	Dallas, Tex.
C. C. Saunders	Wilmington, Del.
C. W. Schemm	St. Louis, Mo.
J. M. Smith	Cleveland, Ohio
J. F. Spease	Portland, Oreg.
W. D. Stevenson, Jr.	Raleigh, N. C.
T. O. Sweatt	New York, N. Y.
H. T. Theis	Bristol, Pa.
B. F. Thomas	New York, N. Y.
William Zelley	Roebling, N. J.
T. O. Zittel	Lackawanna, N. Y.

Mining and Metal Industry

T. B. Montgomery, *chairman;* Control Section, Allis-Chalmers Manufacturing Company, West Allis, Wis.

A. C. Muir, *vice-chairman*	Philadelphia, Pa.
J. E. Breth	Calumet, Mich.
Graham Bright	Pittsburgh, Pa.
A. B. Chafetz	Carlsbad, N. Mex.
R. J. Corfield	Garfield, Utah
J. A. Cortelli	Cleveland, Ohio
F. W. Cramer	Pittsburgh, Pa.
E. W. Davis	Cambridge, Mass.
J. M. Downie	Erie, Pa.
J. H. Edwards	Huntington, W. Va.
Sam Ein	Chicago, Ill.
R. H. Ellis	Pittsburgh, Pa.
Cecil Farrow	Cleveland, Ohio
J. J. Fitzgibbon	Charleston, W. Va.
Lanier Greer	Cleveland, Ohio
L. N. Grier	Pittsburgh, Pa.
C. L. Gust	Lead, S. Dak.
W. R. Harris	East Pittsburgh, Pa.
L. H. Harrison	Birmingham, Ala.
G. A. Hornbecker	Waterbury, Conn.
J. G. Ivy	Chicago, Ill.
L. H. James	Scranton, Pa.
J. Z. Linsenmeyer	East Pittsburgh, Pa.
R. C. McMaster	Columbus, Ohio
W. E. Miller	Schenectady, N. Y.
H. P. Musser	Charleston, W. Va.
F. C. Nicholson	Wilkes Barre, Pa.
B. E. Price	New York, N. Y.
D. E. Renshaw	East Pittsburgh, Pa.
V. E. Schlossberg	East Chicago, Ind.
E. G. Schlup	Middletown, Ohio
F. O. Schnure	Sparrows Point, Md.
Victor Siegfried	Worcester, Mass.
H. I. Stanback	Milwaukee, Wis.
O. J. Swanson	Gary, W. Va.
C. L. Tyler	Irwin, Pa.
T. R. Weichel	Wilkes Barre, Pa.
C. O. Wood	Chicago, Ill.
C. D. Woodward	Butte, Mont.

Servomechanisms

G. S. Brown, *chairman;* Massachusetts Institute of Technology, Building 32, Cambridge 39, Mass.

(Exact title, scope, and personnel to be announced later)

Science and Electronics Group

Science and Electronics Co-ordinating Committee

J. D. Tebo, *chairman,* Bell Telephone Laboratories, Inc., 463 West Street, New York 14, N. Y.

Charles Concordia, *vice-chairman*	Schenectady, N. Y.
W. F. Davidson, *secretary*	New York, N. Y.

Members-at-Large

Walter J. Seeley, representing Board of Directors	Durham, N. C.
I. Melville Stein	Philadelphia, Pa.

Ex-officio members

Chairmen of the technical committees in the Science and Electronics Group

Basic Sciences

Walther Richter, *chairman;* Allis-Chalmers Manufacturing Company, P. O. Box 512, West Allis, Wis.

M. G. Malti, *vice-chairman*	Ithaca, N. Y.
N. S. Hibshman, *secretary*	Brooklyn, N. Y.
J. A. Becker	Murray Hill, N. J.
L. V. Bewley	Bethlehem, Pa.
C. R. Burrows	Ithaca, N. Y.
F. M. Clark	Schenectady, N. Y.
Charles Concordia	Schenectady, N. Y.
P. C. Cromwell	Knoxville, Tenn.
L. A. Finzi	Pittsburgh, Pa.
E. A. Gaugler	Silver Spring, Md.
W. C. Hall	Washington, D. C.
C. W. Hansell	Rocky Point, N. Y.
F. K. Harris	Washington, D. C.
V. P. Hessler	Urbana, Ill.
T. J. Higgins	Madison, Wis.
G. B. Hoadley	Raleigh, N. C.
W. C. Johnson	Princeton, N. J.
W. A. Lewis	Chicago, Ill.
W. H. MacWilliams, Jr.	Whippany, N. J.
P. C. Magnusson	Corvallis, Oreg.
R. C. Mason	East Pittsburgh, Pa.
L. W. Matsch	Chicago, Ill.
G. D. McCann	Pasadena, Calif.
K. W. Miller	Chicago, Ill.
W. E. Phillips	Philadelphia, Pa.
H. J. Plumley	Silver Spring, Md.
Dimiter Ramadanoff	Cleveland, Ohio
W. J. Seeley	Durham, N. C.

H. H. Skilling Stanford University, Calif.
Joseph Slepian East Pittsburgh, Pa.
J. J. Smith Schenectady, N. Y.
V. G. Smith Toronto, Ontario, Canada
F. G. Tappan Norman, Okla.
J. D. Tebo New York, N. Y.
G. S. Timoshenko Storrs, Conn.
J. S. Waters Houston, Tex.
A. H. Waynick State College, Pa.
T. D. Yensen East Pittsburgh, Pa.

Computing Devices

J. G. Brainerd, *chairman;* Moore School of Electrical Engineering, University of Pennsylvania, Philadelphia 4, Pa.
W. H. MacWilliams, Jr., *vice-chairman* Whippany, N. J.
W. C. Johnson, *secretary* Princeton, N. J.
S. N. Alexander Washington, D. C.
S. H. Caldwell Cambridge, Mass.
Charles Concordia Schenectady, N. Y.
E. L. Harder East Pittsburgh, Pa.
J. W. Mauchly Philadelphia, Pa.
G. D. McCann Pasadena, Calif.
M. S. McIlroy Ithaca, N. Y.
J. C. McPherson New York, N. Y.
P. L. Morton Berkeley, Calif.
G. R. Stibitz Burlington, Vt.

Electronic Power Converters

C. C. Herskind, *chairman;* Power Electronics Division, General Electric Company, 1 River Road, Schenectady 5, N. Y.
W. N. Farquhar, *vice-chairman* Pittsburgh, Pa.
C. R. Marcum, *secretary* East Pittsburgh, Pa.
H. R. Blomquist Providence, R. I.
W. F. Bonner East Newark, N. J.
J. L. Boyer East Pittsburgh, Pa.
J. H. Cox Sunnyvale, Calif.
F. W. Cramer Pittsburgh, Pa.
A. G. Dickinson Trail, British Columbia, Canada
J. B. Donnelly Philadelphia, Pa.
I. K. Dortort Milwaukee, Wis.
William Fraser Arvida, Quebec, Can.
W. E. Gutzwiller Milwaukee, Wis.
G. N. Hughes Alcoa, Tenn.
Otto Jensen Philadelphia, Pa.
W. K. MacAdam New York, N. Y.
D. E. Marshall Bloomfield, N. J.
A. J. Maslin Sharon, Pa.
L. W. Morton Schenectady, N. Y.
R. A. Nelson Pittsfield, Mass.
Waldo Porter Vancouver, Wash.
M. E. Reagan East Pittsburgh, Pa.
W. J. L. Rupprecht Midland, Mich.
August Schmidt, Jr. Schenectady, N. Y.
W. C. Sealey Milwaukee, Wis.
F. W. Smith Easton, Pa.
S. L. Smith Philadelphia, Pa.
H. C. Steiner Schenectady, N. Y.
O. J. Swanson Gary, W. Va.
J. T. Thwaites Hamilton, Ontario, Canada
D. E. Truckses New York, N. Y.
C. H. Willis Princeton, N. J.
Harold Winograd Milwaukee, Wis.

Electronics

W. G. Dow, *chairman;* Department of Electrical Engineering, University of Michigan, Ann Arbor, Mich.
J. T. Thwaites, *vice-chairman* Hamilton, Ontario, Canada
E. M. Boone, *secretary* Columbus, Ohio
W. R. G. Baker Syracuse, N. Y.
Rawson Bennett San Diego, Calif.
C. J. Breitwieser San Diego, Calif.
C. B. Brown Washington, D. C.
L. W. Buechler Washington, D. C
R. S. Burnap Harrison, N. J.
A. H. Canada Schenectady, N. Y.
W. R. Clark Philadelphia, Pa.
L. G. Cowles Houston, Tex.
C. F. Crandell Dallas, Tex.
G. J. Crowdes Cambridge, Mass.
A. V. Eastman Seattle, Wash.
G. V. Eltgroth Philadelphia, Pa.
Rudolf Feldt Clifton, N. J.
G. H. Fett Urbana, Ill.
D. G. Fink New York, N. Y.
H. L. Flowers Washington, D. C.
W. A. Geohegan New York, N. Y.
E. R. Haberland Silver Spring, Md.
E. L. Harder East Pittsburgh, Pa.
G. W. Hewitt East Pittsburgh, Pa.
J. E. Hobson Stanford, Calif.
J. R. Hyneman New York, N. Y.
T. P. Kinn Baltimore, Md.
K. S. Koon Endicott, N. Y.
W. A. Leidigh, Jr. Portland, Oreg.
O. W. Livingston Schenectady, N. Y.
D. E. Marshall Bloomfield, N. J.
R. C. Mason East Pittsburgh, Pa.
S. T. Maunder Pittsfield, Mass.
H. R. Meahl Schenectady, N. Y.
H. R. Mimno Cambridge, Mass.
G. A. Morton Princeton, N. J.
R. E. Mumma Dayton, Ohio
B. K. Northrop Ithaca, N. Y.
J. K. Nunan Hollywood, Calif.
David Packard Palo Alto, Calif.
H. L. Palmer Schenectady, N. Y.
G. W. Penney Pittsburgh, Pa.
W. H. Pickering Pasadena, Calif.
O. W. Pike Schenectady, N. Y.
A. J. Quigley Notre Dame, Ind.
Simon Ramo Culver City, Calif.
J. G. Reid, Jr. Washington, D. C.
L. E. Reukema Berkeley, Calif.
R. W. Reynolds Wilmington, Del.
J. D. Ryder Ames, Iowa
Hubert Sharp Denver, Colo.
M. R. Shaw Corning, N. Y.
E. T. Sherwood Milwaukee, Wis.
S. W. Smith Washington, D. C.
E. P. Spandau Dayton, Ohio
H. C. Steiner Schenectady, N. Y.
C. M. Summers Fort Wayne, Ind.
E. R. Thomas New York, N. Y.
F. N. Tompkins Providence, R. I.
D. E. Truckses New York, N. Y.
D. C. Ulrey Lancaster, Pa.
R. F. Wall College Station, Tex.
A. S. Waxman Sparrows Point, Md.
W. C. White Schenectady, N. Y.
C. H. Willis Princeton, N. J.
D. G. Wilson Lawrence, Kans.
Harold Winograd Milwaukee, Wis.
A. M. Zarem Pasadena, Calif.

Instruments and Measurements

W. R. Clark, *chairman;* Leeds and Northrup Company, 4901 Stenton Avenue, Philadelphia 44, Pa.
J. H. Miller, (East) *vice-chairman* Newark, N. J.
J. E. Hobson, (West) *vice-chairman* Stanford, Calif.
J. G. Reid, Jr., *secretary* Washington, D. C.
P. L. Bellaschi Sharon, Pa.
H. W. Berry Camden, N. J.
P. A. Borden Waterbury, Conn.
D. L. Brown Portland, Oreg.
G. S. Brown Cambridge, Mass.
A. L. Brownlee Chicago, Ill.
L. A. Burckmyer, Jr. Ithaca, N. Y.
R. T. Capadanno Philadelphia, Pa.
J. H. Chiles, Jr. Sharon, Pa.
J. E. Clem Schenectady, N. Y.
A. B. Craig Boston, Mass.
C. L. Dawes Cambridge, Mass.
F. C. Doble Belmont, Mass.
E. D. Doyle Philadelphia, Pa.
C. K. Duff Toronto, Ontario, Canada
C. A. Duke Chattanooga, Tenn.
G. W. Dunlap Schenectady, N. Y.
W. N. Eddy Cambridge, Mass.
G. V. Eltgroth Philadelphia, Pa.
Rudolf Feldt Clifton, N. J.
F. J. Gaffney Brooklyn, N. Y.
W. A. Geohegan New York, N. Y.
T. S. Gray Cambridge, Mass.
E. I. Green New York, N. Y.
G. B. Hoadley Raleigh, N. C.
A. J. Hornfeck Cleveland, Ohio
W. G. Knickerbocker Detroit, Mich.
A. E. Knowlton New York, N. Y.
H. C. Koenig New York, N. Y.
E. S. Lee Schenectady, N. Y.
B. E. Lenehan Newark, N. J.
W. N. Lindblad Emeryville, Calif.
J. T. Lusignan, Jr. Mansfield, Ohio
Harold Lyons Washington, D. C.
L. W. Matsch Chicago, Ill.
Whitney Matthews Washington, D. C.
W. J. Mayo-Wells Silver Spring, Md.
David Packard Palo Alto, Calif.
H. T. Plumley Silver Spring, Md.
C. F. Savage Lynn, Mass.
J. P. Scott St. Louis, Mo.
F. B. Silsbee Washington, D. C.
D. B. Sinclair Cambridge, Mass.
Harry Sohon Philadelphia, Pa.
M. B. Stout Ann Arbor, Mich.
J. M. Vanderleck Toronto, Ontario, Canada
A. H. Wing, Jr. Evanston, Ill.
C. J. Zeller New York, N. Y.

Metallic Rectifiers

L. O. Grondahl, *chairman;* Union Switch and Signal Corporation and Westinghouse Air Brake Company, Pittsburgh 18, Pa.
I. R. Smith, *vice-chairman* Buffalo, N. Y.
E. A. Harty, *secretary* West Lynn, Mass.
W. F. Bonner East Newark, N. J.
L. W. Burton Lynn, Mass.
P. G. Cobb Newark, N. J.
M. E. Gamble Indianapolis, Ind.
K. S. Geiges New York, N. Y.
E. A. Groeteke St. Louis, Mo.
C. E. Hamann Lynn, Mass.
C. W. Hansell Rocky Point, N. Y.
C. C. Herskind Schenectady, N. Y.
W. E. Phillips Philadelphia, Pa.
N. Y. Priessman Murray Hill, N. J.
Glen Ramsey North Chicago, Ill.
D. E. Truckses New York, N. Y.
J. L. Wagner Endicott, N. Y.
E. D. Wilson East Pittsburgh, Pa.
Stanley Zwerling Laurelton, N. Y.

Nucleonics

J. J. Smith, *chairman;* General Engineering and Consulting Laboratory, General Electric Company, Schenectady 5, N. Y.
W. F. Davidson, *vice-chairman* New York, N. Y.
P. N. Ross, *secretary* Pittsburgh, Pa.
W. E. Barbour, Jr. Boston, Mass.
H. W. Bibber Schenectady, N. Y.
H. W. Brackney Upton, N. Y.
L. J. Bulliet Rockford, Ill.
J. M. Cork Ann Arbor, Mich.
G. W. Dunlap Schenectady, N. Y.
J. R. Dunning New York, N. Y.
I. A. Getting Cambridge, Mass.
T. S. Gray Cambridge, Mass.
M. M. Hubbard Cambridge, Mass.
H. L. Hull Chicago, Ill.
T. R. Kohler Irvington-on-Hudson, N. Y.
E. H. Krieg Boston, Mass.
R. G. Lorraine Schenectady, N. Y.
H. B. Marvin Syracuse, N. Y.
J. K. Pickard Washington, D. C.
Walther Richter Milwaukee, Wis.
Frederick Seitz Urbana, Ill.
W. E. Shoupp Homestead, Pa.
Abe Tilles San Francisco, Calif.
J. G. Trump Cambridge, Mass.
R. E. Watson Philadelphia, Pa.
J. T. Wilson Milwaukee, Wis.

Therapeutics

H. D. Moreland, *chairman;* Westinghouse Electric Corporation, 2519 Wilkens Avenue, Baltimore 3, Md.
S. Reid Warren, Jr., *vice-chairman* Philadelphia, Pa.
Scott W. Smith, *secretary* Washington, D. C.
F. B. Claussen Portland, Oreg.
M. J. Gross Milwaukee, Wis.
W. B. Kouwenhoven Baltimore, Md.
R. H. Morgan Baltimore, Md.
T. H. Rogers Springdale, Conn.
C. M. Slack Bloomfield, N. J.
W. R. Smith Newark, N. J.
R. E. Watson Philadelphia, Pa.

General Applications Group

General Applications Co-ordinating Committee

H. C. Coleman, *chairman;* Marine and Aviation Section of Industry Engineering Department, Westinghouse Electric Corporation, East Pittsburgh, Pa.
C. C. Whipple, *vice-chairman* Brooklyn, N. Y.
O. A. Wilde, *secretary* Chester, Pa.

Member-at-Large

Elgin B. Robertson, representing Board of Directors Dallas, Tex.

Ex-officio members

Chairmen of the technical committees in the General Applications Group

Air Transportation

W. V. Boughton, *chairman;* Phaostron Company, 151 Pasadena Avenue, South Pasadena, Calif.
D. E. Fritz, *vice-chairman* Bedford, Ohio
W. L. Berry, *secretary* Culver City, Calif.
J. W. Allen Teterboro, N. J.
G. W. Almassy Los Angeles, Calif.
J. H. Blankenbuehler Troy, Ohio
W. C. Bryant Washington, D. C.
J. P. Dallas Los Angeles, Calif.
Peter Duyan, Jr. Santa Monica, Calif.
D. W. Exner Seattle, Wash.
Alec Fisher Lynn, Mass.
Elio Fueyo Miami, Fla.
C. E. Gagnier Los Angeles, Calif.
S. H. Hanville, Jr. Washington, D. C.
W. T. Harding Dayton, Ohio
J. G. Hutton Schenectady, N. Y.
R. R. Jenner Wichita, Kans.
R. D. Jones Fort Wayne, Ind.
W. B. Keller Cleveland, Ohio
R. J. Lusk East Pittsburgh, Pa.
C. F. McCabe San Diego, Calif.
R. E. McDonald St. Paul, Minn.
R. S. Mead Kansas City, Mo.
R. A. Millermaster Milwaukee, Wis.
J. D. Miner Lima, Ohio
C. R. Moore Pacific Palisades, Calif.
W. F. Moore Schenectady, N. Y.
Joseph Nader Chicago, Ill.
W. E. Pakala East Pittsburgh, Pa.
H. F. Rempt Burbank, Calif.
R. A. Rugge Columbus, Ohio
K. R. Smythe Baltimore, Md.
S. D. Summers Washington, D. C.
S. H. Webster Teterboro, N. J.

Domestic and Commercial Applications

Carl F. Scott, *chairman;* General Electric Company, 1285 Boston Avenue, Bridgeport, Conn.
O. K. Coleman, *vice-chairman* Lafayette, Ind.
V. G. Vaughan, Sr., *Secretary,* Attleboro, Mass.
S. W. Andrews New York, N. Y.
J. C. Beckett San Francisco, Calif.
M. M. Brandon New York, N. Y.
A. C. Bredahl Pittsburgh, Pa.
W. B. Buchanan Toronto, Ontario, Canada
O. K. Buck Los Angeles, Calif.
T. H. David, Jr. Chicago, Ill.
M. D. Duffy Portland, Oreg.
R. W. Fleming South Bend, Ind.
R. R. Herrmann Minneapolis, Minn.
T. C. Johnson Bloomfield, N. J.
F. W. Linder La Crosse, Wis.
B. H. Martin Chattanooga, Tenn.
L. W. McCullough New York, N. Y.
B. F. Parr Mansfield, Ohio
A. L. Riche Freeport, Ill.
L. N. Roberson Seattle, Wash.
H. P. Seelye Detroit, Mich.
G. S. Smith Seattle, Wash.
G. C. Tenney San Francisco, Calif.
Wesley Weinerth Philadelphia, Pa.

Land Transportation

H. F. Brown, *chairman;* New York, New Haven and Hartford Railroad, Railroad Station, New Haven 6, Conn.
L. W. Birch, *vice-chairman* Mansfield, Ohio
R. L. Kimball, *secretary* New York, N. Y.
J. C. Aydelott Erie, Pa.
L. S. Billau Baltimore, Md.
H. R. Blomquist Providence, R. I.
W. A. Brecht East Pittsburgh, Pa.
D. M. Burckett Boston, Mass.
C. N. Chase Brooklyn, N. Y.
Andrew Costic Hoboken, N. J.
Llewellyn Evans Chattanooga, Tenn.
J. C. Fox Princeton, W. Va.
A. P. Frey Baltimore, Md.
K. H. Gordon Philadelphia, Pa.
W. S. H. Hamilton New York, N. Y.
P. H. Hatch New Haven, Conn.
G. L. Hoard Seattle, Wash.
J. G. Inglis Toronto, Ontario, Canada
Charles Kerr, Jr. East Pittsburgh, Pa.
Paul Lebenbaum San Francisco, Calif.
S. B. Lent Boston, Mass.
T. M. C. Martin Portland, Oreg.
P. A. McGee New York, N. Y.
E. B. Meissner St. Louis, Mo.
S. R. Negley Philadelphia, Pa.
I. S. Nippes Ridgway, Pa.
A. G. Oehler New York, N. Y.
W. R. Simmons Montreal, Quebec, Canada
D. L. Smith Highwood, Ill.
Jacob Stair, Jr. Philadelphia, Pa.
M. C. Swanson Schenectady, N. Y.
R. G. Thring Washington, D. C.
J. P. Tretton Indianapolis, Ind.
R. S. Warren Elkhart, Ind.
R. A. Williamson Erie, Pa.
G. M. Woods East Pittsburgh, Pa.
H. P. Wright Baltimore, Md.
Lawrence Wylie Seattle, Wash.

Production and Application of Light

E. H. Salter, *chairman;* Electrical Testing Laboratories, Inc., 2 East End Avenue, New York, N. Y.
R. C. Putnam, *vice-chairman* Cleveland, Ohio
R. L. Oetting, *secretary* Cleveland, Ohio
J. F. Angier Washington, D. C.
L. H. Brown Stanford, Calif.
S. W. Bruun New York, N. Y.
H. S. Bull Ann Arbor, Mich.
M. J. Dring South Bend, Ind.
Frank Hansen Los Angeles, Calif.
C. P. Hayes Fort Wayne, Ind.
S. G. Hibben Bloomfield, N. J.
O. W. Holden Los Angeles, Calif.
R. W. Loehr Cleveland, Ohio
H. E. Mahan West Lynn, Mass.
J. A. McDermott Corona, N. Y.
F. H. Murphy Portland, Oreg.
Harris Reinhardt Flushing, N. Y.
D. W. Rowten Cleveland, Ohio
R. C. Slauer Salem, Mass.
E. M. Strong Ithaca, N. Y.
H. F. Wall Detroit, Mich.
C. C. Whipple Brooklyn, N. Y.

Marine Transportation

Oscar A. Wilde, *chairman;* Sun Shipbuilding and Dry Dock Company, Chester, Pa.
E. C. Alger, *vice-chairman* Quincy, Mass.
W. N. Zippler, *secretary* New York, N. Y.
W. B. Armstrong Washington, D. C.
R. A. Beekman Schenectady, N. Y.
H. C. Coleman East Pittsburgh, Pa.
P. J. Dumont New York, N. Y.
J. B. Feder Washington, D. C.
A. R. Gatewood New York, N. Y.
L. M. Goldsmith Philadelphia, Pa.
P. A. Guise New York, N. Y.
H. F. Harvey, Jr. Newport News, Va.
W. E. Jacobsen Schenectady, N. Y.
J. E. Jones Milwaukee, Wis.
Cornelius Krommenhock Brooklyn, N. Y.
Clarence Lynn East Pittsburgh, Pa.
V. W. Mayer Washington, D. C'
S. N. Mead Amesbury, Mass.
W. H. Reed New York, N. Y.
E. M. Rothen New York, N. Y.
L. B. Sinclair Sparrows Point, Md.
C. W. Souder Great Neck, N. Y.
E. H. Stivender Milwaukee, Wis.
G. O. Watson London, England

Power Group

Power Co-ordinating Committee

L. F. Hickernell, *chairman;* Anaconda Wire and Cable Company, Hastings-on-Hudson 6, N. Y.
W. R. Brownlee, *vice-chairman* Jackson, Mich.
R. S. Gardner, *secretary* New York, N. Y.

Members-at-Large

R. T. Henry, representing Board oj Directors Buffalo, N. Y.
L. F. Kennedy Schenectady, N. Y.
A. E. Knowlton New York, N. Y.
C. F. Wagner East Pittsburgh, Pa.
Ex-officio members
Chairmen of the technical committees in the Power Group

Carrier Current

S. C. Bartlett, *chairman;* American Gas and Electric Service Corporation, 30 Church Street, New York 8, N. Y.
C. W. Boadway, *vice-chairman* Toronto, Ontario, Canada
E. W. Kenefake, *secretary* Syracuse, N. Y.
W. H. Blankmeyer Butte, Mont.
J. M. Dunham New York, N. Y.
L. G. Eaton Boston, Mass.
J. R. Ellison Oklahoma City, Okla.
R. C. Ericson Hammond, Ind.
L. F. Ferri Elyria, Ohio
L. F. Kennedy Schenectady, N. Y.
S. C. Leyland Newark, N. J.
Samuel Lubin Washington, D. C.
L. E. Ludekens Los Angeles, Calif.
D. M. MacGregor New York, N. Y.
T. W. MacLean Spokane, Wash.
R. H. Miller San Francisco, Calif.
F. M. Rives Syracuse, N. Y.
T. T. Smith Vancouver, Wash.
O. A. Starcke Davenport, Iowa

B. W. Storer Chicago, Ill.
H. J. Sutton Beaumont, Tex.
T. D. Talmage Chattanooga, Tenn.
Mead Warren, Jr. Alcoa, Tenn.
M. H. Wood Baltimore, Md.

Insulated Conductors

Herman Halperin, *chairman;* Commonwealth Edison Company, 72 West Adams Street, Chicago 90, Ill.
V. A. Sheals, *vice-chairman* Schenectady, N. Y.
C. T. Hatcher, *secretary* New York, N. Y.
G. W. Acock Trenton, N. J.
C. F. Avila Boston, Mass.
H. G. Barnett East Pittsburgh, Pa.
C. E. Baugh San Francisco, Calif.
E. D. Bent Montreal, Quebec, Canada
Andrew Bodicky St. Louis, Mo.
A. S. Brookes Newark, N. J.
T. J. Brosnan Buffalo, N. Y.
W. R. Bullard New York, N. Y.
H. W. Clark Washington, D. C.
E. W. Davis Cambridge, Mass.
W. A. Del Mar Yonkers, N. Y.
C. D. Eash Jackson, Mich.
D. M. Farnhamm Montreal, Quebec, Canada
G. H. Fiedler Rochester, N. Y.
L. E. Fogg Phillipsdale, R. I.
J. D. Frantz Portland, Oreg.
M. W. Ghen N. S. Pittsburgh, Pa.
L. F. Hickernell Hastings-on-Hudson, N. Y.
R. A. Hopkins Knoxville, Tenn.
A. H. Kidder Philadelphia, Pa.
R. H. Kolks Cincinnati, Ohio
L. I. Komives Detroit, Mich.
M. J. Lowenberg Boston, Mass.
C. G. Mansfield Los Angeles, Calif.
R. E. Morse New York, N. Y.
Lawrence Palmer Seattle, Wash.
W. T. Peirce Worcester, Mass.
M. L. Perry Kansas City, Mo.
R. S. Peterson Chicago, Ill.
A. D. Pettee Bayonne, N. J.
R. A. Schatzel Rome, N. Y.
V. E. Schlossberg East Chicago, Ind.
G. B. Shanklin Schenectady, N. Y.
H. D. Short Toronto, Ontario, Canada
F. V. Smith Chicago, Ill.
L. G. Smith Baltimore, Md.
G. M. L. Sommerman Evanston, Ill.
E. G. Sturdevant Bristol, R. I.
Gordon Thompson New York, N. Y.
H. H. Watson Bridgeport, Conn.
R. J. Wiseman Passaic, N. J.
R. K. Woodson Kansas City, Mo.
K. S. Wyatt New York, N. Y.
C. W. Zimmerer New York, N. Y.
W. N. Zippler New York, N. Y.

Power Generation

B. G. A. Skrotzki, *chairman; Power*, McGraw-Hill Publishing Company, Inc., 330 West 42d Street, New York 18, N. Y.
J. A. Brooks, *vice-chairman* New York, N. Y.
Giuseppe Calabrese, *secretary* New York, N. Y.
R. E. Appleyard Milwaukee, Wis.
J. E. Barkle East Pittsburgh, Pa.
C. S. Bowden Cleveland, Ohio
E. P. Bryant Los Angeles, Calif.
R. M. Bush Washington, D. C.
Hubbell Carpenter Duluth, Minn.
A. D. Caskey Chicago, Ill.
H. E. Deardorff Dayton, Ohio
S. M. Denton Denver, Colo.
E. F. Dissmeyer Jackson, Mich.
Alex Dovjikov Portland, Oreg.
John Finlaw Philadelphia, Pa.
C. B. Fontaine Lynn, Mass.
C. A. Harrington Cleveland, Ohio
H. R. Harris Detroit, Mich.
A. F. Hartung Kansas City, Mo.
A. P. Hayward Pittsburgh, Pa.
B. V. Hoard Portland, Oreg.
W. R. Johnson San Francisco, Calif.
L. A. Kilgore East Pittsburgh, Pa.
A. J. Krupy Chicago, Ill.
F. L. Lawton Montreal, Quebec, Canada
J. T. Madill Arvida, Quebec, Canada
E. F. Maryatt San Francisco, Calif.
J. B. McClure Schenectady, N. Y.
G. H. McDaniel New York, N. Y.
D. R. Pattison Johnstown, Pa.
M. L. Perry Kansas City, Mo.
W. W. Perry Binghamton, N. Y.
A. L. Pollard Seattle, Wash.
C. S. Randall Washington, D. C.
H. B. Robinson Raleigh, N. C.
G. M. Tatum Richmond, Va.
C. W. Watchorn Baltimore, Md.
C. C. Whelchel San Francisco, Calif.
R. R. Wisner Boston, Mass.
G. R. Woodman Los Angeles, Calif.

Protective Devices

W. J. Rudge, *chairman;* General Electric Company, 100 Woodlawn Avenue, Pittsfield, Mass.
H. R. Stewart, *vice-chairman* Boston, Mass.
A. A. Johnson, *secretary* East Pittsburgh, Pa.
L. J. Blaize Dallas, Tex.
V. J. Cissna Chattanooga, Tenn.
J. E. Clem Schenectady, N. Y.
J. O. Coleman Boston, Mass.
L. M. Connors Toronto, Ontario, Canada
H. A. Cornelius Chicago, Ill.
F. M. Defandorf Washington, D. C.
G. K. Ditlow Washington, D. C.
G. B. Dodds Pittsburgh, Pa.
R. H. Earle Milwaukee, Wis.
T. I. Edlridge Philadelphia, Pa.
W. D. Hardaway Denver, Colo.
E. B. Harmon Denver, Colo.
E. M. Hunter Schenectady, N. Y.
P. A. Jeanne New York, N. Y.
W. A. Lewis, Jr. Chicago, Ill.
F. R. Longley Springfield, Mass,
Cort Lowerison Los Angeles, Calif.
T. H. Mawson Birmingham, Ala.
Corbett McLean Portland, Oreg.
E. G. Norell Chicago, Ill.
A. M. Opsahl East Pittsburgh, Pa.
H. L. Rorden Portland, Oreg.
H. D. Ruger Sparrows Point, Md.
W. E. Rushlow Washington, D. C.
O. L. Sidenfaden Los Angeles, Calif.
W. T. Smith New York, N. Y.
J. M. Towner Baltimore, Md.
S. S. Watkins New York, N. Y.
E. H. Yonkers Chicago, Ill.

Relays

E. L. Michelson, *chairman;* Commonwealth Edison Company, 72 West Adams Street, Chicago 90, Ill.
A. J. McConnell, *vice-chairman* Schenectady, N. Y.
J. R. Linders, *secretary* Cleveland, Ohio
C. E. Asbury Jackson, Mich.
M. A. Bostwick Portland, Oreg.
G. E. Brooks Oklahoma City, Okla.
R. J. Cooper Atlanta, Ga.
R. E. Cordray Philadelphia, Pa.
G. E. Dana Binghamton, N. Y.
G. B. Dodds Pittsburgh, Pa.
M. A. Faucett Urbana, Ill.
F. S. Fehr Reading, Pa.
L. F. Ferri Elyria, Ohio
L. L. Fountain East Pittsburgh, Pa.
Sidney Goldsmith Cincinnati, Ohio
E. T. B. Gross Chicago, Ill.
T. R. Halman Detroit, Mich.
E. L. Harder East Pittsburgh, Pa.
V. J. Hayes Waterbury, Conn.
B. C. Hicks Westmount, Quebec, Canada
J. H. Kinghorn New York, N. Y.
R. A. Larner Fort Worth, Texas
W. A. Lewis Chicago, Ill.
S. C. Leyland Newark, N. J.
H. F. Lindemuth New York, N. Y.
Cort Lowerison Los Angeles, Calif.
W. E. Marter Pittsburgh, Pa.
W. A. Morgan Denver, Colo.
C. E. Parks Indianapolis, Ind.
H. R. Paxson Philadelphia, Pa.
F. C. Poage New York, N. Y.
E. G. Ratz Hamilton, Ontario, Canada
K. N. Reardon Pittsburgh, Pa.
H. P. Sleeper Newark, N. J.
W. K. Sonnemann Newark, N. J.
George Steeb Buffalo, N. Y.

Rotating Machinery

W. R. Hough, *chairman;* Reliance Electric and Engineering Company, 1088 Ivanhoe Road, Cleveland 10, Ohio
C. G. Veinott, *vice-chairman* Lima, Ohio
J. L. Fuller, *secretary*
J. E. Allen Lancaster, Pa.
W. R. Appleman Dayton, Ohio
E. L. Bailey Detroit, Mich.
Sterling Beckwith Milwaukee, Wis.
B. H. Caldwell Schenectady, N. Y.
A. G. Conrad New Haven, Conn.
James DeKiep Minneapolis, Minn.
E. F. Dissmeyer Jackson, Mich.
L. O. Dorfman New York, N. Y
W. H. Fifer Washington, D. C.
D. E. Fritz Cleveland, Ohio
J. S. Gault Ann Arbor, Mich.
C. B. Hathaway Buffalo, N. Y.
V. P. Hessler Urbana, Ill.
L. E. Hildebrand Lynn, Mass.
J. W. Jones Philadelphia, Pa.
C. E. Kilbourne Schenectady, N. Y.
A. A. Kroneberg Los Angeles, Calif.
I. M. Levy Dayton, Ohio
T. M. Linville Schenectady, N. Y.
M. R. Lory East Pittsburgh, Pa.
Clarence Lynn East Pittsburgh, Pa.
W. E. Meserve Ithaca, N. Y.
R. C. Moore Milwaukee, Wis.
J. G. Noest New York, N. Y.
E. I. Pollard Ridgway, Pa.
C. P. Potter St. Louis, Mo.
F. C. Rushing Buffalo, N. Y.
V. E. Schlossberg East Chicago, Ind.
M. L. Schmidt Fort Wayne, Ind.
J. F. Sellers Milwaukee, Wis.
P. H. Trickey St. Louis, Mo.
R. W. Wieseman Schenectady, N. Y.
S. S. Wolff St. Louis, Mo.

Substations

G. S. Lunge, *chairman;* Central Station Engineering Divisions, General Electric Company, Schenectady 5, N. Y.
R. C. Ericson, *vice-chairman* Hammond, Ind.
Marino Fraresso, *secretary* Toronto, Ontario, Canada
T. J. Allen Atlanta, Ga.
Herman Bany Philadelphia, Pa.
Harris Barber Boston, Mass.
R. O. Bell Milwaukee, Wis.
F. J. Berger Philadelphia, Pa.
M. K. Brown Buffalo, N. Y
C. C. Crane Madison, Wis.
B. D. Dexter San Francisco, Calif.
M. V. Eardley Los Angeles, Calif.
G. P. Fallon Baltimore, Md.
H. F. Gidlund Denver, Colo.
C. D. Highleyman South Bend, Ind.
K. B. Hoffman New York, N. Y.
E. M. Hunter Schenectady, N. Y.
S. C. Killian Chicago, Ill.
W. J. Lank Washington, D. C.
N. G. Larson Chicago, Ill.
J. T. Lienert Portland, Oreg.
W. K. MacAdam New York, N. Y.
W. M. McCauley Greensburg, Pa.
I. S. Mendenhall Detroit, Mich.
D. C. Millard Denver, Colo.
M. E. Reagan East Pittsburgh, Pa.
J. H. Rixse, Jr. Washington, D. C.
W. S. Sheering Springfield, Mass.
C. H. Smoke Portsmouth, Va.
R. F. Stevens Portland, Oreg.
K. L. Wheeler Cleveland, Ohio

Switchgear

F. A. Lane, *chairman;* American Gas and Electric Service Corporation, 30 Church Street, New York 8, N. Y.
H. V. Nye, *vice-chairman* West Allis, Wis.
Otto Naef, *secretary* New York, N. Y.
F. S. Benson San Francisco, Calif.
C. K. Beyette Fort Worth, Tex.
Harry Brown New Haven, Conn.
J. S. Brown Pittsburgh, Pa.
E. A. Childerhose Boston, Mass.
H. W. Codding Newark, N. J.
V. L. Cox Philadelphia, Pa.
G. H. Doan Detroit, Mich.
J. A. Elzi Jackson, Mich.
W. E. Enns Portland, Oreg.
K. J. C. Falck Philadelphia, Pa.
R. M. Ferrill Chattanooga, Tenn.
J. M. Geiger Buffalo, N. Y.
W. J. Gilson Toronto, Ontario, Canada
J. W. Graff Birmingham, Ala.
W. C. Gragg Amarillo, Tex.
W. D. Hardaway Denver, Colo.
V. J. Hayes Waterbury, Conn.
M. H. Hobbs East Pittsburgh, Pa.
L. M. Hovey Winnepeg, Manitoba, Canada
C. L. Killgore Denver, Colo.
I. T. Knight Kansas City, Mo.
H. A. P. Langstaff Pittsburgh, Pa.
H. J. Lingal East Pittsburgh, Pa.
F. W. McCloska Chicago, Ill.
W. J. McLachlan Schenectady, N. Y.
R. G. Meyerand St. Louis, Mo.
E. F. Miller Rock Island, Ill.
V. G. Mutanay Schenectady, N. Y.
M. L. Perry Kansas City, Mo.
H. H. Rudd Greensburg, Pa.

E. K. Sadler	Los Angeles, Calif.
A. W. Shelhorse	Atlanta, Ga.
O. L. Sidenfaden	Los Angeles, Calif.
J. F. Sinnott	San Diego, Calif.
Garland Stamper	Dayton, Ohio
A. Van Ryan	South Milwaukee, Wis.
J. H. Vivian	Los Angeles, Calif.
R. L. Webb	New York, N. Y.
C. E. Winegartner	Cleveland, Ohio
J. D. Wood	Philadelphia, Pa.
J. C. Woods	Chicago, Ill.
S. W. Zimmerman	Ithaca, N. Y.

System Engineering

Earle Wild, *chairman;* Commonwealth Edison Company, 72 West Adams Street, Chicago 90, Ill.

Robert Brandt, *vice-chairman*	Boston, Mass.
O. W. Manz, Jr., *secretary*	Brooklyn, N. Y.
C. G. Adams	Schenectady, N. Y.
C. P. Almon, Jr.	Chattanooga, Tenn.
John Bankus	Portland, Oreg.
M. L. Blair	Spokane, Wash.
W. R. Brownlee	Jackson, Mich.
O. E. Charlton	Birmingham, Ala.
O. A. Demuth	Portland, Oreg.
A. G. Dewars	Minneapolis, Minn.
W. B. Fisk	New York, N. Y.
G. D. Floyd	Toronto, Ontario, Canada
A. P. Fugill	Detroit, Mich.
E. E. George	New York, N. Y.
E. T. B. Gross	Chicago, Ill.
W. D. Hardaway	Denver, Colo.
H. L. Harrington	Buffalo, N. Y.
A. P. Hayward	Pittsburgh, Pa.
R. G. Hooke	Newark, N. J.
L. R. Janes	Chicago, Ill.
A. A. Johnson	East Pittsburgh, Pa.
W. R. Johnson	San Francisco, Calif.
C. B. Kelley	Des Moines, Iowa
C. L. Killgore	Denver, Colo.
M. H. Lovelady	Corpus Christi, Tex.
N. M. Lovell	Tucson, Ariz.
C. W. Mayott	Hartford, Conn.
G. H. McDaniel	New York, N. Y.
W. E. Montgomery	Los Angeles, Calif.
S. B. Morehouse	Philadelphia, Pa.
W. H. Osterle	Pittsburgh, Pa.
H. P. Peters	Atlanta, Ga.
H. W. Phillips	Philadelphia, Pa.
C. B. Signor	Binghamton, N. Y.
W. O. Smith	Mineola, N. Y.
G. M. Tatum	Richmond, Va.
J. J. Tesar	Cleveland, Ohio
R. M. Walker	El Paso, Tex.
M. L. Waring	New York, N. Y.
C. W. Watchorn	Baltimore, Md.
G. S. Whitlow	St. Louis, Mo
A. L. Williams	Los Angeles, Calif.

Transformers

J. B. Hodtum, *chairman;* Allis-Chalmers Manufacturing Company, N. S. Station, Pittsburgh 12, Pa.

F. J. Vogel, *vice-chairman*	Chicago, Ill.
M. K. Brown, *secretary*	Buffalo, N. Y.
J. A. Adams	Philadelphia, Pa.
F. S. Brown	Pittsburgh, Pa.
R. J. Brown	Toronto, Ontario, Canada
J. L. Cantwell	Pittsfield, Mass.
J. H. Chiles	Sharon, Pa.
J. E. Clem	Schenectady, N. Y.
G. W. Clothier	Milwaukee, Wis.
Merrill De Merit	Chattanooga, Tenn.
J. A. Elzi	Jackson, Mich.
M. M. Ewell	Portland, Oreg.
I. W. Gross	New York, N. Y.
W. G. James	Sharon, Pa.
A. A. Johnson	East Pittsburgh, Pa.
H. B. Keath	St. Louis, Mo.
D. L. Levine	Chicago, Ill.
C. M. Lovell	St. Louis, Mo.
M. L. Manning	Bay City, Mich.
J. R. Meador	Pittsfield, Mass.
V. M. Montsinger	Pittsfield, Mass.
M. H. Pratt	Syracuse, N. Y.
T. D. Reimers	New York, N. Y.
S. E. Schultz	Portland, Oreg.
W. C. Sealey	Milwaukee, Wis.
F. L. Snyder	Sharon, Pa.
K. M. Stevens	Alhambra, Calif.
J. M. Towner	Baltimore, Md.
P. A. Vance	Fort Wayne, Ind.
H. H. Wagner	Canonsburg, Pa.
C. E. Winegartner	Cleveland, Ohio

Transmission and Distribution

I. W. Gross, *chairman;* American Gas and Electric Service Corporation, 30 Church Street, New York 8, N. Y.

S. B. Crary, *vice-chairman*	Schenectady, N. Y.
R. E. Pierce, *secretary*	New York, N. Y.
C. E. Baugh	San Francisco, Calif.
A. E. Beattie	Beaumont, Tex.
P. L. Bellaschi	Sharon, Pa.
H. C. Bingham	Cleveland, Ohio
D. K. Blake	Schenectady, N. Y.
P. W. Blye	New York, N. Y.
C. A. Booker	Boston, Mass.
Bryce Brady	Oklahoma City, Okla.
T. J. Brosnan	Buffalo, N. Y.
Harold Cole	Detroit, Mich.
E. R. Coulbourn	Birmingham, Ala.
A. E. Curtis	Montreal, Quebec, Canada
H. A. Dambly	Philadelphia, Pa.
A. E. Davison	Toronto, Ontario, Canada
T. C. Duncan	New York, N. Y.
H. A. Frey	Baltimore, Md.
J. H. Hagenguth	Pittsfield, Mass.
K. E. Hapgood	Chattanooga, Tenn.
E. R. Hendrickson	Maywood, Ill.
J. B. Hodtum	Pittsburgh, Pa.
E. K. Huntington	Rochester, N. Y.
E. L. Kanouse	Los Angeles, Calif.
C. H. Kraft	St. Louis, Mo.
A. A. Kroneberg	Los Angeles, Calif.
J. T. Lusignan	Mansfield, Ohio
D. W. Nethercut	Elyria, Ohio
J. E. O'Brien	Washington, D. C.
E. W. Oesterreich	Pittsburgh, Pa.
J. S. Parsons	East Pittsburgh, Pa.
C. K. Poarch	New York, N. Y.
L. M. Robertson	Denver, Colo.
R. R. Robinson	Niles, Mich.
W. E. Rushlow	Washington, D. C.
E. V. Sayles	Jackson, Mich.
A. N. Shealy	Baltimore, Md.
F. V. Smith	Chicago, Ill.
K. M. Smith	Chicago, Ill.
E. C. Starr	Corvallis, Oreg.
C. F. Wagner	East Pittsburgh, Pa.
R. L. Witzke	East Pittsburgh, Pa.

Institute Representatives

Aeronautical Electrical Equipment Standardization

W. V. Boughton, liaison representative with NASC and SAE	South Pasadena, Calif.

Alfred Noble Prize Committee, ASCE

T. M. Linville	Schenectady, N. Y.

American Association for the Advancement of Science, Council

J. W. Barker	New York, N. Y.
I. Melville Stein	Philadelphia, Pa.

American Research Committee on Grounding

C. T. Sinclair	Pittsburgh, Pa.

American Standards Association, Standards Council

F. E. Harrell	Cleveland, Ohio
Charles Rufus Harte	New Haven, Conn.
R. T. Henry	Buffalo, N. Y.

Alternates

R. C. Bergvall	East Pittsburgh, Pa.
J. R. North	Jackson, Mich.
E. B. Paxton	Schenectady, N. Y.

American Year Book, Advisory Board

H. H. Henline	New York, N. Y.

Construction Industry Advisory Council

Henry A. Lardner	New York, N. Y.

Electrical Standards Committee, ASA

John Grotzinger	Akron, Ohio
F. E. Harrell	Cleveland, Ohio
J. J. Pilliod	New York, N. Y.

Alternates

H. E. Farrer	New York, N. Y.
I. W. Gross	New York, N. Y.
E. B. Paxton	Schenectady, N. Y.

Division Assignment

Division on Communication and Electronics

H. E. Farrer	New York, N. Y.
F. E. Harrell	Cleveland, Ohio
J. J. Pilliod	New York, N. Y.

Division on Power

I. W. Gross	New York, N. Y.
John Grotzinger	Akron, Ohio
E. B. Paxton	Schenectady, N. Y.

Engineering Foundation Board

J. W. Barker	New York, N. Y.
C. G. Suits	Schenectady, N. Y.

Engineering Societies Monographs Committee

F. M. Farmer	New York, N. Y.
W. I. Slichter	New York, N. Y.

Engineers' Council for Professional Development

M. S. Coover	Ames, Iowa
E. W. Davis	Cambridge, Mass.
M. D. Hooven	Newark, N. J.

Engineers Joint Council

J. F. Fairman	New York, N. Y.
H. H. Henline	New York, N. Y.
B. D. Hull	Dallas, Tex.
Everett S. Lee	Schenectady, N. Y.

General Electric Educational Fund Fellowship Committee

J. F. Fairman	New York, N. Y.

Hertz Award Committee

M. S. Coover	Ames, Iowa

Hoover Medal Board of Award

H. S. Osborne	New York, N. Y.
David C. Prince	Schenectady, N. Y.
J. G. Tarboux	Ithaca, N. Y.

Industry Committee on Interior Wiring Design

M. M. Brandon	New York, N. Y.
L. C. Peterman	New York, N. Y.

John Fritz Medal Board of Award

N. E. Funk	Philadelphia, Pa.
J. Elmer Housley	Alcoa, Tenn.
B. D. Hull	Dallas, Tex.
Everett S. Lee	Schenectady, N. Y.

Joint Committee for Development of Statistical Applications in Engineering and Manufacturing

W. P. Dobson	Toronto, Ontario, Canada

Library Board, United Engineering Trustees, Inc.

George Sutherland	New York, N. Y.
H. M. Turner	New Haven, Conn.

Marston Medal Board of Award

Harry B. Gear	Chicago, Ill.

National Association of Corrosion Engineers, Inter-Society Committee on Corrosion

L. J. Gorman	New York, N. Y.
H. M. Trueblood	Dobbs Ferry, N. Y.

National Bureau of Engineering Registration, Advisory Board

Elgin B. Robertson	Dallas, Tex.

National Electronics Conference, Board of Directors

W. G. Dow	Ann Arbor, Mich.

National Fire Protection Association, Electrical Committee

W. B. Kouwenhoven	Baltimore, Md.
Robin Beach, alternate	Brooklyn, N. Y.

National Fire Waste Council

Robin Beach	Brooklyn, N. Y.
W. B. Kouwenhoven	Baltimore, Md.

National Research Council, Division of Engineering and Industrial Research

W. B. Kouwenhoven	Baltimore, Md.

National Technological Advisory Committee

Quarterly of Applied Mathematics

M. G. Malti	Ithaca, N. Y.

United Engineering Trustees, Inc.

J. F. Fairman	New York, N. Y.
W. H. Harrison	New York, N. Y.
D. A. Quarles	New York, N. Y.

United States National Committee of the International Commission on Illumination

Ward Harrison	Cleveland, Ohio
Harris Reinhardt	Flushing, N. Y.
E. H. Salter	New York, N. Y.

United States National Committee of the International Electrotechnical Commission

W. P. Dobson	Toronto, Ontario, Canada
H. E. Farrer	New York, N. Y.
F. E. Harrell	Cleveland, Ohio
E. B. Paxton	Schenectady, N. Y.
J. J. Pilliod	New York N. Y.

Washington Award Commission

W. A. Lewis, Jr.	Chicago, Ill.
Frank V. Smith	Chicago, Ill.

World Power Conference, Executive Committee of United States National Committee

J. F. Fairman	New York, N. Y.

Sections

Name	District	When Organized	Chairman	Secretary	Secretary's Address
Akron	2	Aug. 12, '20	H. P. Davis	J. R. Dorsey	YMCA, Akron 8, Ohio
Alabama	4	May 22, '29	J. W. Davis	Gayle Riley	Alabama Power Co., 600 No. 18th St., Birmingham 2, Ala.
Arizona	8	Mar. 22, '41	W B Bustard	I. G. Jenkins, Jr.	Central Arizona Light & Power Co., 2215 No. 25th St., Phoenix Ariz.
Arkansas	7	Apr. 23, '47	W. A. Lewis, Jr.	R. B. Newman	Reynolds Metals Co., Jones Mills Plant, Jones Mills, Ark.
Arrowhead	5	Apr. 23, '47	P. A. Beckjord	Roy B. Wiprud	137 Greenwood Lane, Duluth 3, Minn.
Beaumont	7	June 27, '45	R. W. Parker	A. F. Briggs	Sun Oil Co., Beaumont, Tex.
Boston	1	Feb. 13, '03	J. J. Loustaunau	H. J. Randolph	J. J. Costello Co., 131 Clarendon St., Boston, Mass.
Canton	2	Nov. 5, '47	C. L. Lucal	R. V. Kelch	4520 13th St., N. W., Canton 7, Ohio
Central Indiana	5	Jan. 12, '12	G. M. Grabbe	J. W. Sears	Indiana Bell Tel. Co., 240 No. Meridian St., Indianapolis 9, Ind.
Chicago	5	1893	H. E. Nason	E. L. Michelson	Commonwealth Edison Co., 72 West Adams St., Chicago, Ill.
Cincinnati	2	June 30, '20	F. E. Wiatt	D. T. Michael	Cincinnati Gas & Elec. Co., 4th & Main Sts., Cincinnati 2, Ohio
Cleveland	2	Sept. 27, '07	R. L. Oetting	J. A. Cortelli	Clark Controller Co., 1146 East 152nd St., Cleveland 10, Ohio
Columbus	2	Mar. 17, '22	N. L. Greene	C. E. Warren	Ohio State Univ., Columbus 10, Ohio
Connecticut	1	Apr. 16, '21	J. B. Powell	F. W. Buck	United Illuminating Co., 80 Temple St., New Haven 6, Conn.
Dayton	2	June 9, '43	E. Herzog	J. G. Tolentino	2 Palermo Place, Dayton 4, Ohio
Denver	6	May 18, '15	F. A. Eastom	E. R. Jones	Mountain States Tel. & Tel. Co., Box 960, Denver 1, Colo.
East Tennessee	4	Sept. 2, '36	T. D. Talmage	J. D. Sharp, Jr.	3004 Pope Drive, Chattanooga, Tenn.
Erie	2	Jan. 11, '18	M. J. Kolhoff	J. F. Davis	General Elec. Co., 2901 East Lake Road, Erie, Pa.
Florida	4	Jan. 28, '31	R. S. Davis	Jess D. Thomas	904 Ethan Allen, Jacksonville, Fla.
Fort Wayne	5	Aug. 14, '08	J. F. Eitman	J. H. Capps	General Elec. Co., 1635 Bway, Fort Wayne, Ind.
Georgia	4	Jan. 14, '04	E. S. Lammers	H. P. Peters	Georgia Inst. of Tech., Engg. Experiment Sta. Atlanta, 3 Ga.
Houston	7	Aug. 7, '28	W. O. Ray	W. E. Silvus	P. O. Box 2537, Houston, Tex.
Illinois Valley	5	June 30, '45	E. W. Stone	E. Krefting	317 Persimmon St., Peoria 6, Ill.
Iowa	5	June 29, '29	T. W. Schroeder	F. E. Keith	Keith Elec. Construction Co., 1213 Walnut St., Des Moines 9, Iowa
Ithaca	1	Oct. 15, '02	H. L. Livingood	S. W. Zimmerman	102 Valley Road, Ithaca, N. Y.
Kansas City	7	Apr. 14, '16	R. M. Kerchner	A. J. Nicholson	Kansas City Power & Light Co., P.O. Box 679, Kansas City 10, Mo.
Lehigh Valley	2	Apr. 16, '21	C. H. Sprague	A. L. Price	Pennsylvania Power & Light Co., Hazleton, Pa.
Los Angeles	8	May 19, '08	E. L. Bettannier	E. K. Sadler	Kelman Elec. & Mfg. Co., 1650 Naud St., Los Angeles 12, Calif.
Louisville	4	Oct. 15, '26	R. D. Spalding	H. T. Smith	2816 Virginia Ave., Louisville 11, Ky.
Lynn	1	Aug. 22, '11	R. S. Schlotterbeck	A. M. Bjontegard	General Elec. Co., 920 Western Ave., West Lynn, Mass.
Madison	5	Jan. 8, '09	Leonard Hesse	Rubin A. Imm	102 Electrical Lab., Univ. of Wis., Madison, Wis.
Mansfield	2	Mar. 6, '39	E. C. Ryan	F. L. Hanson	The Ideal Elec. & Mfg. Co., Mansfield, Ohio
Maryland	2	Dec. 16, '04	F. H. Rogers	J. W. Magee	Westinghouse Elec. Corp., Std. Oil Bldg., Baltimore 3, Md.
Memphis	4	May 22, '30	W. B. Thompson	J. R. Owens	3563 Mimosa St., Memphis, Tenn.
Mexico	7	June 29, '22	E. D. Luque	F. Aubert	Apartado Postal 1399, Mexico,Federal District, Mexico
Miami	4	Feb. 3, '49	C. H. Summers	W. T. Edwards, Jr.	Southern Bell Tel. & Tel. Co., 1410—20th St., Miami Beach, Fla.
Michigan	5	Jan. 13, '11	E. F. Dissmeyer	O. E. Bowlus	18628 Lauder, Detroit 19, Mich.
Milwaukee	5	Feb. 11, '10	F. J. Van Zeeland	C. P. Feldhausen	Cutler-Hammer, Inc., 315 No. 12th St., Milwaukee 2, Wis.
Minnesota	5	Apr. 7, '02	Lincoln Rietow	R. E. Willey	Northwestern Bell Tel. Co., 224 So. 5th St., Minneapolis 2, Minn.
Montana	9	June 24, '31	J. R. Walker	Marion O. Hansen	112—14th St., Great Falls, Mont.
Montreal	10	Apr. 16, '43	N. L. Morgan	A. Malkin	Canadian Car & Foundry Co. Ltd., 621 Craig St. W., Montreal, Quebec 3, Canada
Nebraska	6	Jan. 21, '25	F. C. Howard	C. N. Allen	Allis-Chalmers Mfg. Co., 9th & Farnam Sts., Omaha 8, Nebr.
New Mexico-West Texas	7	Mar. 7, '40	Oscar Gutsch	G. R. Yelderman	General Elec. Co., 109 North Oregon, El Paso, Tex.
New Orleans	4	Dec. 8, '33	E. I. Blanchard	H. E. Pritchard, Jr.	5836 General Haig St., New Orleans 19, La.
New York	3	Dec. 10, '19	D. W. Taylor	J. P. Neubauer	402 Fairway Road, Ridgewood, N. J.
Niagara Frontier	1	Feb. 10, '25	F. C. Rushing	C. J. Brumbaugh	129 Hunt Ave., Hamburg, N. Y.
Niagara International	10	Aug. 5, '48	W. G. A. Barr	E. A. Dillon	11 York St., St. Catharines, Ontario, Canada
North Carolina	4	Mar. 21, '29	G. G. Mattison	B. V. Martin	Westinghouse Elec. Corp., 210 East Sixth St., Charlotte 1, N. C.
North Texas	7	May 18, '28	P. G. Wallace	A. L. Jones, Jr.	General Elec. Co., 1801 North Lamar St., Dallas, Tex.
Oklahoma City	7	Feb. 16, '22	E. W. Allen	J. C. Turner	Southwestern Bell Tel. Co., 1004 Telephone Bldg., Oklahoma City 2, Okla.
Ottawa	10	June 23, '49	Fred Fleming	Gordon Cathcart	137 Clarendon Ave., Ottawa, Ontario, Canada
Panhandle Plains	7	June 12, '47	George Dupree	G. R. Bunton	Box 631, Lubbock, Tex.
Philadelphia	2	Feb. 18, '03	W. F. Henn	H. H. Sheppard	Rumsey Elec. Co., 1007 Arch St., Philadelphia 7, Pa.
Pittsburgh	2	Oct. 13, '02	F. H. Schlough	L. N. Grier	Aluminum Co. of America, 801 Gulf Bldg., Pittsburgh, Pa.
Pittsfield	1	Mar. 25, '04	T. E. Rodhouse	G. L. Vallin	General Elec. Co., Pittsfield, Mass.
Portland	9	May 18, '09	R. B. Temple	Waldo Porter	Aluminum Co. of America, Vancouver, Wash.
Providence	1	Mar. 12, '20	O. E. Sawyer	C. B. Leathers	General Elec. Co., 111 Westminster St., Providence, R. I.
Richland	9	Apr. 23, '48	W. J. Dowis	R. B. Crow	206 Barth Ave., Richland, Wash.
Rochester	1	Oct. 9, '14	J. H. Rogers	E. M. Morecock	817 Chili Ave., Rochester, N. Y.
Rock River Valley	5	Apr. 23, '47	S. A. Coxhead	W. C. Busch	1421 North Church St., Rockford, Ill.
St. Louis	7	Jan. 14, '03	R. C. Horn	J. C. Lebens, Jr.	7322 Melrose Ave., University City, Mo.
San Diego	8	Jan. 18, '39	J. F. Sinnott	O. L. Doolittle	4738 Works Place, San Diego 4, Calif.
San Francisco	8	Dec. 23, '04	T. C. McFarland	Remi Bollaert	Westinghouse Elec. Corp., 410 Bush St., San Francisco 8, Calif.
Schenectady	1	Jan. 26, '03	J. C. Page	L. T. Rader	General Elec. Co., Bldg. 69, Schenectady 5, N. Y.
Seattle	9	Jan. 19, '04	Ray Rader	H. R. Loew	General Elec. Co., 710 Second Ave., Seattle 11, Wash.
Sharon	2	Dec. 11, '25	G. R. Monroe	A. J. Maslin	59 South Oakland Ave., Sharon, Pa.
Shreveport	4	June 12, '47	L. T. Williams	C. M. L. Pons	3536 Del Rio, Shreveport 65, La.
South Bend	5	Feb. 26, '41	R. A. Cliff	Rayhue Neighbours	526 So. Twyckenham Drive., South Bend 15, Ind.
South Carolina	4	Mar. 2, '40	E. P. Miller	W. E. Dent, Jr.	The Springs Cotton Mills, Lancaster, S. C.
South Texas	7	May 23, '30	L. L. Antes	R. R. Krezdorn	153 Engg. Bldg., University of Texas, Austin, Tex.
Spokane	9	Feb. 14, '13	T. W. MacLean	R. M. Gilbert	Westinghouse Elec. Corp., 1023 West Riverside Ave., Spokane 8, Wash.
Springfield	1	June 29, '22	W. E. Maxwell	W. L. Vest, Jr.	54 Churchill Road, West Springfield, Mass.
Syracuse	1	Aug. 12, '20	J. D. Hershey	H. H. Graley	Central New York Power Corp., 300 Erie Blv'd., W. Syracuse, N. Y.
Toledo	2	June 3, '07	F. A. Furfari	W. M. Campbell	2145 Central Grove Ave., Toledo, Ohio
Toronto	10	Sept. 30, '03	J. M. Somerville	W. R. Harmer	Hydro-Elec. Power Co. of Ont., 620 Univ. Ave., Toronto, Ontario, Canada
Tulsa	7	Oct. 1, '37	Dick Ray	W. H. Plumer	Southwestern Bell Tel. Co., 424 So. Detroit, Tulsa, Okla.
Urbana	5	Nov. 25, '02	H. N. Hayward	P. R. Egbert	University of Illinois, Urbana, Ill.
Utah	9	Mar. 9, '17	F. O. Wald	J. A. McDonald	General Elec. Co., P. O. Box 779, Salt Lake City 1, Utah
Vancouver	10	Aug. 22, '11	W. J. Lind	F. O. Wollaston	B. C. Elec. Ry. Co., Ltd., 425 Carroll St., Vancouver, British Columbia, Canada
Virginia	4	May 19, '22	L. Saunders	P. R. Spracher	P. O. Box 1194, Richmond 19, Va.
Washington	2	Apr. 9, '03	Dixon Lewis	L. V. Berkner	7213 Bradley Blvd., Bethesda 14, Md.
West Virginia	2	Apr. 9, '40	E. B. Ellerbe	J. J. Fitzgibbon	306 McCorkle Ave., Charleston 28, W. Va.
Western Virginia	4	June 23, '49	Ira H. McMann	E. L. Munday, Jr.	P. O. Box 2021, Appalachian Elec. Power Co., Roanoke, Va.
Wichita	7	Sept. 16, '37	R. F. Dice	J. E. McNicol	Kansas Gas & Elec. Co., 201 No. Market, Wichita 2, Kans.
Worcester	1	Feb. 18, '20	D. R. Percival	W. G. Coleman	General Elec. Co., 507 Main St., Worcester 8, Mass.
Total Sections	85				

Subsections

Name	Chairman	Secretary	Secretary's Address
Albuquerque (New Mexico-West Texas Section)	W. O. McCord, Jr.	A. D. Taylor	1722 East Gold Ave., Albuquerque, N. Mex.
Baton Rouge (New Orleans Section)	F. R. Adams	E. F. Tims	3155 Lakeshore Drive, Baton Rouge 15, La.
Billings (Montana Section)		Harold Black	714 Avenue G, Billings, Mont.
Binghamton Area (Ithaca Section)	K. S. Koon	J. P. Peterson	Westinghouse Elec. Corp., 86 Court St., Binghamton 62, N. Y.
Boulder City (Los Angeles Section)	W. H. Taylor	F. A. Latham	Los Angeles Water & Power Dept., 600 Nevada Highway, Boulder City, Nev.
Casper, Wyo. (Denver Section)			
Central Texas (North Texas)			
Centre County (Pittsburgh Section)	R. J. E. Hemman	R. M. Smith	Ord. Res. Lab., Penna. State Col., State College, Pa.
Charleston (South Carolina Section)			
Charlotte (North Carolina Section)	M. F. Leftwich	I. G. Wallace, Jr.	205 Wales Ave., Charlotte, N. C.
Columbia (South Carolina Section)			
Corpus Christi (South Texas Section)	A. B. Weaver	J. H. Watts, Jr.	Westinghouse Elec. Corp., 508 Medical Professional Bldg., Corpus Christi, Tex.
Fort Worth (North Texas Section)	J. L. Candry	Karl J. Ratliff	1101 Electric Bldg., Fort Worth 2, Tex.
Fox River Valley (Milwaukee Section)	Herbert F. Weckwerth	Donald Christison	209 Frederick St., Menasha, Wis.
Freeport (Houston Section)	H. K. Brown	R. B. Adams	P. O. Box 413, Lake Jackson, Tex.
Fresno (San Francisco Section)	C. L. Smith	William Green	U. S. Bureau of Reclamation, T. W. Patterson Bldg., Fresno 1, Calif.
Great Falls (Montana Section)			
Hamilton (Toronto Section)			
Hampton Roads (Virginia Section)	C. E. Hastings	S. H. Fletcher	Va. Electric & Power Co., Newport News, Va.
Hudson Valley (New York Section)	W. E. Smalley	J. E. Ruscher	49 Carroll St., Poughkeepsie, N. Y.
Jackson (Miss.) (New Orleans Section)			
Jacksonville (Florida Section)			
Johnstown (Pittsburgh Section)	W. R. Wood	R. S. Baum	Univ. of Pittsburgh, 325 Cypress Ave., Johnstown, Pa.
Lake Charles (New Orleans Section)	G. B. S. Ricketts	J. J. Alleman	29 Hibiscus Road, Maplewood, La.
Lancaster York (Maryland Section)	W. H. Freund	H. H. Wittenberg	RCA Victor Div., Radio Corp. of America, Lancaster, Pa.
Lima (Dayton Section)	B. O. Austin	O. M. Swain	Westinghouse Elec. Corp., Engg. Dept., Lima, Ohio
Mid-State (North Carolina Section)	F. R. Jackson, Jr.	L. H. Allcorn, Jr.	2425 Elizabeth Ave., Winston-Salem 7, N. C.
Muscle Shoals (East Tennessee Section)			
Nashville (Memphis Section)	Walter Criley	E. R. Boruch	1229 Stahlman Bldg., 234—3rd Ave., North, Nashville 3, Tenn.
New Hampshire (Boston Section)			
New Jersey (New York Section)			
Northern New York (Syracuse Section)	J. B. Pitman	L. F. Pries	New York State Agric. & Tech. Inst., 8 College St., Canton, N. Y.
Northwest Arkansas (Arkansas Section)	W. B. Stelzner	R. E. Anderson	Southwestern Gas & Elec. Co., De Queen, Ark.
Oak Ridge (East Tennessee Section)			
Quad-Cities (Iowa Section)			
Red River Valley (Minnesota Section)	M. R. Hughes	H. K. Ugelstad	Northern States Power Co., 612 N. P. Ave., Fargo, N. Dak.
Richmond (Virginia Section)	C. L. Gilkeson	L. D. Johnson, 3rd	R. F. D. 7, Box 201, Richmond, Va.
Sacramento (San Francisco Section)	C. R. Day	G. A. Fleming	3711 17th St., Sacramento 18, Calif.
Saginaw Valley (Michigan Section)	E. L. Holmgren	F. H. Justin	401 W. Sugnet Road, Midland, Mich.
St. Maurice Valley (Montreal Section)			
San Jose (San Francisco Section)	L. O. Templeton	Warren Raab	1188 Thornton Way., Campbell, Calif.
Sangamon (Illinois Valley Section)	G. E. Sangster	J. T. Youngblood	Sangamo Elec. Co., Springfield, Ill.
Shasta (San Francisco Section)	W. G. Whitney	G. A. Thompson	U. S. Bureau of Reclamation, Redding, Calif.
Tri-State (West Virginia Section)			
West Central Texas (North Texas Section)	R. D. Henley	C. B. Herbert	Route 2, Hamlin, Tex.
West Coast (Florida)			
West Michigan (Michigan Section)	R. M. Chermak	L. A. Zahorsky	127 Colfax, N.E., Grand Rapids, Mich.
Wilmington (Philadelphia Section)	E. W. Randall, Jr.	E. R. Streed	R. F. D. 3, Box 156, Wilmington, Del.
Zanesville (Columbus Section)	R. W. Hartsook	C. G. Winters	1115 Seborn Ave., Zanesville, Ohio

Geographical District Executive Committees

	District	Chairman (Vice-President, AIEE)	Secretary (District Secretary)	Chairman, District Committee on Student Activities
1	North Eastern	Victor Siegfried, American Steel & Wire Co., Worcester 7, Mass.	Frederick G. Webber, 9 Federal Court, Springfield 5, Mass.	A. G. Conrad, Yale University, New Haven, Conn.
2	Middle Eastern	C. G. Veinott, Westinghouse Electric Corp., Lima, Ohio	W. A. Dynes, 312 Lonsdale Ave., Dayton 9, Ohio	K. F. Sibila, University of Akron, Akron 4, Ohio
3	New York City	J. L. Callahan, R. C. A. Laboratories, Radio Corporation of America, 66 Broad St., New York 4, N. Y.	R. T. Oldfield, Public Service Commission, 233 Broadway, New York 7, N. Y.	F. A. Wahlers, Polytechnic Inst. of Brooklyn, 99 Livingston St., Brooklyn 2, N. Y.
4	Southern	W. J. Seeley, Duke University, Durham, N. C.	T. H. Mawson, Commonwealth & Southern Corp., 600 North 18th St., Birmingham 2, Ala.	L. V. McLean, Louisiana State University, Baton Rouge 3, La.
5	Great Lakes	E. W. Seeger, Cutler-Hammer, Inc., 315 N. 12th St., Milwaukee 1, Wis.	N. C. Pearcy, Pioneer Service & Engineering Co., 231 S. LaSalle St., Chicago 4, Ill.	E. W. Kane, Marquette Univ., 1515 W. Wisconsin Ave., Milwaukee 3, Wis.
6	North Central	W. C. DuVall, University of Colorado, Boulder, Colo.	G. E. Gless, Jr., University of Colorado, Boulder, Colo.	C. H. Chinburg, Colorado A. & M. College, Fort Collins, Colo.
7	South West	G. N. Pingree, General Electric Co., 1801 N. Lamar St., Dallas 2, Tex.	Gibbs A. Dyer, Southwestern Bell Telephone Co., Dallas 1, Tex.	Ralph W. Tapy, University of New Mexico, Albuquerque, N. Mex.
8	Pacific	R. A. Hopkins, Westinghouse Electric Corp., 600 St. Paul Ave., Los Angeles 14, Calif.	T. M. Blakeslee, Dept. of Water & Power, City of Los Angeles, 207 South Broadway, Los Angeles 12, Calif.	R. C. Lewis, University of Southern Calif., Los Angeles 7, Calif.
9	North West	Richard McKay, Washington Water Power Co., West 825 Trent Ave., Spokane 6, Wash.	H. C. Glaze, Jr., General Electric Co., S. 162 Post St., Spokane 8, Wash.	V. L. Palmer, University of Washington, Seattle 5, Wash.
10	Canada	A. H. Frampton, English Elec. Co. of Canada Ltd., St. Catharines, Ontario, Canada	J. I. Gram, Hydro-Electric Power Comm. of Ont., Box 237, Niagara Falls, Ontario, Canada	W. B. Coulthard, University of British Columbia, Vancouver, British Columbia, Canada

NOTE: Each District executive committee includes also the chairmen and secretaries of all Sections within the District, the District vice-chairman of the AIEE membership committee, and a member of the Sections Committee who is resident in the District.

Student Branches

Name and Location	District	Counselor (Member of Faculty)
Akron, University of, Akron, Ohio	2	K. F. Sibila
Alabama Polytechnic Inst., Auburn	4	R. D. Spann
Alabama, University of, University	4	W. F. Gray
Alberta, University of, Edmonton, Canada	10	R. E. Phillips
Arizona, University of, Tucson	8	J. C. Clark
Arkansas, Univ. of, Fayettesville	7	N. H. Barnette
British Columbia, Univ. of, Vancouver, Canada	10	W. B. Coulthard
Brooklyn, Polytechnic Inst. of, Brooklyn, N. Y., (Day)	3	F. A. Wahlers
Brooklyn, Polytechnic Inst. of, Brooklyn, N. Y., (Evening)	3	Anthony B. Giordano
Brown University, Providence, R. I.	1	F. N. Tompkins
Bucknell University, Lewisburg, Pa.	2	Ralph C. Walker
California Inst. of Technology, Pasadena	8	William H. Pickering
California, University of, Berkeley	8	R. M. Saunders
Carnegie Inst. of Technology, Pittsburgh, Pa.	2	George M. Anderson
Case Inst. of Technology, Cleveland, Ohio	2	Carl F. Schuneman
Catholic University of America, Washington, D. C.	2	J. C. Michalowicz
Cincinnati, Univ. of, Cincinnati, Ohio	2	A. C. Herweh
Clarkson College of Technology, Potsdam, N. Y.	1	George W. Reed
Clemson A. & M. College, Clemson, S. C.	4	F. T. Tingley
Colorado A. & M. College, Fort Collins	6	C. H. Chinburg
Colorado, University of, Boulder	6	W. G. Worcester
Columbia University, New York, N. Y.	3	W. A. LaPierre
Connecticut, Univ. of, Storrs	1	Clarence W. Schultz
Cooper Union, New York, N. Y.	3	E. W. Starr
Cornell University, Ithaca, N. Y.	1	M. S. McIllroy
Delaware, University of, Newark	2	H. S. Bueche
Denver, University of, Denver, Colo.	6	A. M. Stiles
Detroit, University of, Detroit, Mich.	5	H. O. Warner
Drexel Inst. of Technology, Philadelphia, Pa.	2	F. C. Powell
Duke University, Durham, N. C.	4	Otto Meier, Jr.
Fenn College, Cleveland, Ohio	2	R. W. Schindler
Florida, University of, Gainesville	4	Paul H. Nelson
George Washington Univ., Washington, D. C.	2	Jerome S. Antel, Jr.
Georgia Inst. of Technology, Atlanta, Ga.	4	H. B. Duling
Harvard University, Cambridge, Mass.	1	John C. Fisher
Idaho, University of, Moscow	9	J. Hugo Johnson
Illinois Inst. of Technology, Chicago	5	E. T. B. Gross
Illinois, University of, Urbana	5	E. A. Reid
Iowa State College, Ames	5	G. Richardson
Iowa, University of, Iowa City	5	E. B. Kurtz
Johns Hopkins University, Baltimore, Md.	2	T. Larsen
Kansas State College, Manhattan	7	Earl L. Sitz
Kansas, University of, Lawrence	7	E. B. Phillips
Kentucky, University of, Lexington	4	H. Alex Romanowitz
Lafayette College, Easton, Pa.	2	J. G. Reifsnyder
Lehigh University, Bethlehem, Pa.	2	W. Lyle Donaldson
Louisiana Polytechnic Inst., Ruston, La.	4	Milton R. Johnson, Jr.
Louisiana State University, Baton Rouge	4	L. V. McLean
Louisville, University of, Louisville, Ky.	4	Harry T. Smith
Maine, University of, Orono	1	P. M. Seal
Manhattan College, New York, N. Y.	3	Robert T. Weil
Marquette University, Milwaukee, Wis.	5	E. W. Kane
Maryland, University of, College Park	2	L. J. Hodgins
Massachusetts Inst. of Technology, Cambridge	1	E. W. Boehne
Michigan College of Mining & Technology, Houghton	5	G. W. Swenson
Michigan State College, East Lansing	5	C. E. Goodell
Michigan, University of, Ann Arbor	5	John J. Carey
Milwaukee School of Engineering, Milwaukee, Wis.	5	R. J. Ungrodt
Minnesota, University of, Minneapolis	5	J. H. Kuhlmann
Mississippi State College, State College	4	Paul B. Jacobs, Jr.
Missouri School of Mines & Metallurgy, Rolla	7	I. H. Lovett
Missouri, University of, Columbia	7	G. V. Lago
Montana State College, Bozeman	9	G. D. Sheckels
Nebraska, University of, Lincoln	6	E. J. Ballard, Jr.
Nevada, University of, Reno	8	I. J. Sandorf
Newark College of Engineering, Newark, N. J.	3	C. R. Moore
New Hampshire, University of, Durham, N. H.	1	A. J. Merlini
New Mexico College of A. & M. Arts, State College	7	Russell Riese
New Mexico, University of, Albuquerque	7	J. Lawton Ellis
New York, College of the City of, New York, N. Y.	3	Harry Baum
New York, University of, New York	3	James Ley
North Carolina State College, Raleigh	4	W. D. Stevenson, Jr.
North Dakota Agri. College, Fargo	5	Harry S. Dixon
North Dakota, University of, Grand Forks	5	K. B. MacKichan
Northeastern University, Boston, Mass.	1	Roland G. Porter
Northwestern University, Evanston, Ill.	5	A. H. Wing
Norwich University, Northfield, Vt.	1	
Notre Dame, University of, Notre Dame, Ind.	5	L. F. Stauder
Ohio Northern University, Ada	2	W. R. Ankrom
Ohio State University, Columbus	2	Edmund D. Ayres
Ohio University, Athens	2	D. B. Green
Oklahoma A. & M. College, Stillwater	7	David L. Johnson
Oklahoma, University of, Norman	7	Gerald Tuma
Oregon State College, Corvallis	9	Melvin J. Kofoid
Pennsylvania State College, State College	2	A. P. Powell
Pennsylvania, University of, Philadelphia	2	Kenneth C. Fegley
Pittsburgh, University of, Pittsburgh, Pa.	2	R. C. Gorham
Pratt Institute, Brooklyn, N. Y.	3	Robert B. Morgan
Princeton University, Princeton, N. J.	2	Norman W. Mather
Puerto Rico, University of, Mayaguez, P. R.	3	Miguel Wiewall, Jr.
Purdue University, Lafayette, Ind.	5	C. R. Nichols
Rensselaer Polytechnic Institute, Troy, N. Y.	1	Emerson D. Broadwell
Rhode Island State College, Kingston	1	John L. Hummer
Rice Institute, Houston, Tex.	7	J. S. Waters
Rose Polytechnic Institute, Terre Haute, Ind.	5	C. C. Knipmeyer
Rutgers University, New Brunswick, N. J.	3	P. H. Daggett
Santa Clara, Univ. of, Santa Clara, Calif.	8	Henry P. Nettesheim
South Carolina, Univ. of, Columbia	4	S. A. Ferguson
South Dakota School of Mines & Tech., Rapid City	6	J. O. Kammerman
South Dakota State College, Brookings	5	Wm. H. Gamble
Southern California, Univ. of, Los Angeles	8	Rodney C. Lewis
Southern Methodist Univ., Dallas, Tex.	7	F. W. Tatum
Stanford University, Stanford, University, Calif.	8	W. G. Hoover
Stevens Inst. of Technology, Hoboken, N. J.	3	W. L. Sullivan
Swarthmore College, Swarthmore, Pa.	2	C. A. Lister
Syracuse University, Syracuse, N. Y.	1	Henry F. Cooke
Tennessee, University of, Knoxville	4	W. O. Leffell
Texas, A. & M. College of, College Station	7	N. F. Rode
Texas Technological College, Lubbock	7	
Texas, University of, Austin	7	A. J. McCrocklin, Jr.
Toronto, University of, Toronto, Ontario, Canada	10	L. S. Lauchland
Tufts College, Medford, Mass.	1	A. H. Howell
Tulane University, New Orleans, La.	4	Marion E. Forsman
Union College, Schenectady, N. Y.	1	Owen G. Owens
Utah, University of, Salt Lake City	9	O. C. Haycock
Vanderbilt University, Nashville, Tenn.	4	S. R. Schealer
Vermont, University of, Burlington	1	Howard M. Smith, Jr.
Villanova College, Villanova, Pa.	2	John B. Clothier
Virginia Military Institute, Lexington	4	J. S. Jamison
Virginia Polytechnic Institute, Blacksburg	4	Claudius Lee
Virginia, University of, Charlottesville	4	Gordon Carter
Washington, State College of, Pullman	9	O. E. Osburn
Washington, University of, Seattle	9	H. M. Rustebakke
Washington University, St. Louis, Mo.	7	Pierre M. Honnell
Wayne University, Detroit, Mich.	5	Edward L. Fairchild
West Virginia University, Morgantown	2	Everette C. Dubbe
Wisconsin, University of, Madison	5	Vincent C. Rideout
Worcester Poly. Institute, Worcester, Mass.	1	Donald C. Alexander
Wyoming, University of, Laramie	6	R. O. Trueblood
Yale University, New Haven, Conn.	1	A. G. Conrad

Total Branches 129

Scopes of AIEE Technical Committees

The following sections list the names and scopes of the various AIEE technical committees. In accordance with the revised committee structure set in motion by the Board of Directors at a meeting in Worcester, Mass., April 23, 1947 (*EE, Jun '47, pp 597–8*), and approved as latest list of committee functions by the Board of Directors at their meeting in Swampscott, Mass., June 23, 1949, these committees are organized under the following groups: Communication; General Applications; Industry; Power; and Science and Electronics.

Communication Group

COMMITTEE ON AURAL BROADCASTING SYSTEMS

Scope—Treatment of that branch of communications in which the dominant factors are amplitude-modulation and frequency-modulation broadcasting stations, studio equipment, home radio receivers, and other facilities related to the broadcasting of aural programs for entertainment and instruction.

COMMITTEE ON COMMUNICATION SWITCHING SYSTEMS

Scope—Treatment of that branch of communications in which the dominant factors are manual and automatic switching facilities and apparatus associated with communication systems.

COMMITTEE ON RADIO COMMUNICATION SYSTEMS

Scope—Treatment of that branch of communications in which the dominant factors are radio communication systems of all kinds such as point-to-point systems including radio relay for telephone, telegraph, or television; and mobile systems for land, marine, or air-borne services.

COMMITTEE ON SPECIAL COMMUNICATION APPLICATIONS

Scope—Treatment of those branches of the communications field which do not logically fall within the scope of the other communication committees such as: electroacoustics, including wire tape and disk recording; railroad communications; and subjects related to materials and components used in communication apparatus. If the field of application of these materials and components falls also within the scopes of other technical committees, action with those committees may be joint.

COMMITTEE ON TELEGRAPH SYSTEMS

Scope—Treatment of that branch of communications in which the dominant factors are the terminal and intermediate equipment or associated apparatus utilized in providing telegraph services over manual or automatic facilities. It includes also other forms of record communication such as facsimile, telephoto, teletypewriters.

COMMITTEE ON TELEVISION BROADCASTING SYSTEMS

Scope—Treatment of that branch of communications in which the dominant factors are those activities related to television broadcasting systems including studio and mobile pick-up equipment, studio-transmitter links, television receivers, and other facilities associated with the technique of telecasting.

COMMITTEE ON WIRE COMMUNICATION SYSTEMS

Scope—Treatment of that branch of communications in which the dominant factors are wire transmission systems and associated apparatus as applied to open-wire lines, land and submarine cables for providing telephone service, and program transmission for aural and television broadcasting.

General Applications Group

COMMITTEE ON AIR TRANSPORTATION

Scope—Treatment of all matters in which the dominant factors are the design, installation, and performance of airplane equipment, including batteries, generating equipment, voltage regulators, instruments, wiring devices, motors, special controls, reverse current cutouts, bonding, shielding, filtering, inverters, dynamotors, lightning detection and protection, lighting (interior and exterior), system characteristics, weight-power relationships, and heating devices. With respect to communication and navigation; ground lighting; electric testing equipment for measuring strain, vibration, noise, corrosion, and so forth; and electric welding of airplane structures; action should be in co-operation with the respective AIEE technical committees in these fields and similar committees of other organizations.

COMMITTEE ON DOMESTIC AND COMMERCIAL APPLICATIONS

Scope—Treatment of all matters in which the dominant technical factors are the interior supply and utilization of electric power in domestic premises, such as single or multiple dwellings, garages, and other accessory structures, and in institutional buildings such as hospitals, schools, libraries, and so forth. Such subjects as control, interior wiring, heat-operated and motor-operated appliances or equipment for use in domestic, commercial, or institutional premises, including elevators and escalators, are properly within this scope. Subjects relating to the production and application of light, as such, are within the scope of the Production and Application of Light Committee.

COMMITTEE ON LAND TRANSPORTATION

Scope—Treatment of all matters in which the dominant factors are the requirements, design, selection, relation, and operation of electric apparatus and material for transportation (exclusive of air and marine transportation, which are functions of the Air Transportation and Marine Transportation Committees) of passengers and freight and the economic questions incident thereto. Such subjects as the electrification of steam railways, street railways, pantograph trolleys and overhead catenaries, electric locomotives (oil-electric, gasoline-electric, or 3-power locomotives), multiple-unit cars, electric-traction motors, main and auxiliary control equipment, railway substations, mercury-arc rectifier applications, and railways signaling and automatic train control are within the scope of this committee.

COMMITTEE ON MARINE TRANSPORTATION

Scope—Treatment of all matters in which the dominant factors are the application, relation, and installation of electric machinery and materials of whatever nature on shipboard, and the requirements for specialized devices, materials, or constructions peculiar to such application.

COMMITTEE ON PRODUCTION AND APPLICATION OF LIGHT

Scope—Treatment of those matters in which the dominant factor is the application of electric energy through its conversion into light, including necessary materials, devices, and mechanisms, in so far as these matters are considered of interest and value to the members of the Institute. This committee functions as a liaison between the Institute and various organizations dealing with the production and utilization of light, such as the Illuminating Engineering Society, the Optical Society of America, and others. Its activities include translating the theoretical and technical accomplishments of those organizations into terms of the practical aspects of the production and application of light, thereby serving to inform Institute members of important progress in this field. Where problems of electrical supply service, voltage, or distribution are involved, action shall be joint with the Transmission and Distribution Committee.

Industry Group

COMMITTEE ON CHEMICAL, ELECTROCHEMICAL, AND ELECTROTHERMAL APPLICATIONS

Scope—Treatment of all matters in which the dominant factors are the generation of electricity through chemical processes, and the application of electricity to chemical or metallurgical operations (exclusive of electric welding and the phenomena of the arc in so far as it is concerned with the deposition of metal in welding, which is a function of the Committee on Electric Welding, and exclusive of magnetics, which is a function of the Committee on Basic Sciences), including the relations, installation, and operation of the devices necessary thereto, and the requirements of specialized devices, materials, or construction peculiar thereto.

COMMITTEE ON ELECTRIC HEATING

Scope—Treatment of all matters in which the dominant factors are the requirements, selection, installation, and operation of machines, devices, and equipment relating to electric heating of all kinds, including dielectric and induction, radiation, resistance, and high-temperature furnaces. Design and theory of devices shall be handled by consultation with Electronics or other committees as required.

COMMITTEE ON ELECTRIC WELDING

Scope—Treatment of all matters in which the dominant factors are the requirements, design, construction, selection, installation, and operation of machinery and devices relating to electric welding, including studies of the electromagnetic phenomena of the arc in so far as it is concerned with the deposition of metal in welding. Such subjects as electric welding methods and the electric machinery and control equipment specially designed for welding are properly within the scope of this committee.

COMMITTEE ON GENERAL INDUSTRY APPLICATIONS

Scope—Treatment of all matters in which the dominant factors are the requirements, selection, installation, and operation of machinery and devices relating to machine tools and to the processing and/or fabrication (assembly) of nonmetallic materials. Such materials include textiles, rubber, paper, plastics.

The problems relating to assembly line processes of all materials are considered within the scope of this committee.

COMMITTEE ON INDUSTRIAL CONTROL

Scope—Treatment of all matters in which the dominant factors are the design, construction, and performance of industrial control, and the way in which it serves to govern in some predetermined manner the electric power delivered to the apparatus to which it is connected.

COMMITTEE ON INDUSTRIAL POWER SYSTEMS

Scope—Treatment of all matters in which the dominant factors are the requirements, selection, co-ordination, installation, and operation of machines, devices, and equipment necessary for generating and transmitting electric power within an industrial plant for use solely by that plant. (Actual design of devices and equipment not included.) Design of distribution systems within the industrial plant are a part of the scope of this committee.

When such industrial systems are interconnected with public systems, the action shall be joint with the Committee on Power Generation or on Transmission and Distribution.

COMMITTEE ON MINING AND METAL INDUSTRY

Scope—Treatment of all matters in which the dominant factors are the requirements, selection, installation, and operation of machinery and devices relating to the processing of metal and those relating to mining of any kind.

Matters pertaining to blast furnaces, metal rolling, and metal drawing are properly within the scope of this committee.

COMMITTEE ON SERVOMECHANISMS

Exact title and scope to be announced.

Power Group

COMMITTEE ON CARRIER CURRENT

Scope—Treatment of all matters in which the dominant factors are the design, construction, and operation of equipment and circuits for the application of carrier currents in the generation, transmission, and distribution of electric power. Included in the scope of this committee shall be treatment of the following:

Carrier current equipment and circuits for
  Relaying
  Control (supervisory, load, frequency, and so forth)
  Metering
  Communication as applied to power system use

also

Line traps
Coupling capacitors
Beamed radio systems for system control

COMMITTEE ON INSULATED CONDUCTORS

Scope—Treatment of all matters in which the dominant factors are the design, construction, and operation of insulated conductors and the accessories thereto used in the generation, transmission, distribution, and utilization of electric power. Included in this scope shall be treatment of the following:

Cable supply systems (including solid, oil-filled, and gas-filled cables)
Insulated wire and cable
Accessories (including potheads, wiring ducts, and conduit, not including insulated bus runs as in metalclad switchgear)
Structures (joint with Transmission and Distribution Committee)
Cable characteristics
Insulations
Sheaths and coverings
Utilization wiring systems
Special purpose cables
Tests and measurements
Network limiters
Insulated line conductors (specifications)

Matters relating to insulated conductors specifically designed for applications covered by certain other technical committees such as Communication, Transportation, and Electric Heating may be treated jointly with that committee if emphasis is on general principles, or exclusively by the application committee if emphasis is on the particular requirements of the application.

COMMITTEE ON POWER GENERATION

Scope—Treatment of all matters relating to the design, construction, and operation of electric power generating stations, including auxiliary equipment incidental thereto (where such equipment is not otherwise specifically assigned to other technical committees).

Treatment of all matters pertaining to the design, construction, and operation of steam boiler plants, dams, reservoirs, nuclear piles, and other primary sources of energy to prime movers; also the prime movers themselves used in the generation of electric energy.

Treatment of all matters relating to the economics of generation and supply of electric power within individual generating stations.

Included in this scope shall be treatment of the following:

Prime movers (hydro, steam, oil, gas, nuclear, wind power)
Speed governors for prime movers
Station load and frequency control (joint with Systems Engineering Committee)
Control systems (joint with Substation Committee)
Excitation systems and voltage regulators
Station design (generating plant)
Auxiliaries and accessories
Production costs—design and operating economics (separate station)
Co-ordination of prime mover and electric machine design
Bus design (joint with Switchgear and Substation Committees)

COMMITTEE ON PROTECTIVE DEVICES

Scope—Treatment of all matters in which the dominant factors are the design, construction, and operation of devices and equipment to limit or prevent damage to electric power generation, transmission, or distribution systems, or equipment; such damage arising from excessive current, voltage, or from lightning. Included in this scope shall be treatment of the following:

Capacitors (where used as protective devices)
Lightning protective devices (such as arresters, protector tubes, air gaps, and expulsion gaps)
Fault limiting devices (including neutral grounding devices)
Lightning investigations (joint with Transmission and Distribution Committee)
Reactors and grounding transformers (joint with Transformer Committee)

Matters relating to protective devices specifically designed for applications covered by certain other technical committees such as Industrial Control, Industrial Power Systems, or Communication, may be treated jointly with that committee if emphasis is on general principles or exclusively by the application committee if emphasis is on the particular requirements of the application.

COMMITTEE ON RELAYS

Scope—Treatment of all matters in which the dominant factors are the design, construction, and operation of protective relays including all matters necessary to the functioning of such relays employed in the generation, transmission, and distribution of electric energy. Included in this scope shall be treatment of the following:

Relays and automatic devices (fault and load discriminating)
Relay protective schemes, including relay co-ordination
Network relays (design, application, and performance)

Matters relating to relays specifically designed for applications, covered by certain other technical committees such as Industrial Control, Communication, and Transportation may be treated jointly with that committee if emphasis is on general principles; or exclusively by the application committee if emphasis is on the particular requirements of the application.

COMMITTEE ON ROTATING MACHINERY

Scope—Treatment of all matters in which the dominant factors are the requirements, design, construction, and operation of rotating machinery for the generation of electric energy or its conversion into other forms of energy. There shall be included in this scope treatment of the following:

Synchronous machines
Induction machines
D-c machines
Single-phase and fractional-horsepower machines
Motor generator sets
Rotating frequency changers
Rotating phase balancers
Synchronous converters
Insulation and dielectric problems related to rotating machinery

Matters relating to rotating machinery specifically designed for applications covered by certain other technical committees such as Electric Welding, Transportation, or Communication may be treated jointly with that application committee if the emphasis is on general principles; or exclusively by the application committee if the emphasis is on the particular requirements of the application.

COMMITTEE ON SUBSTATIONS

Scope—Treatment of all matters in which the dominant factors are the electrical and structural design, construction, installation, operation, and control of automatic, semiautomatic, and nonautomatic substations, including switching and transformer stations.

Included in the scope of this committee shall be treatment of the following:

Automatic, semiautomatic, and nonautomatic substations
Switching stations
Fundamental single-line wiring diagrams
Bus design (joint with Switchgear and Power Generation Committee)
Automatic and supervisory control systems (joint with Power Generation Committee)
Supervisory control devices
Structural arrangements for substations
Telemetering (joint with Instruments and Measurements Committee)
Insulation co-ordination (joint with Transmission and Distribution Committee)

COMMITTEE ON SWITCHGEAR

Scope—Treatment of all matters in which the dominant factors are the design, construction, and operation of devices or assembled gear to establish (make), interrupt, or change connections in an electric circuit under normal or abnormal conditions. Included in this scope shall be treatment of the following:

Power circuit breakers
Large air circuit breakers
Low-voltage air circuit breakers
Switchgear assemblies
Switches
Network protectors (design and application)
Bus design (joint with Power Generation and Substations Committees)
Insulation, insulators, and hardware for switchgear
Automatic reclosers
High-voltage fuses and cutouts (above 600 volts)

Matters relating to switchgear or switchgear devices specifically designed for applications covered by certain other technical committees such as industrial control, communication, electronics, and transportation may be treated jointly with that committee if emphasis is on general principles; or exclusively by the application committee if emphasis is on the particular requirements of the application.

COMMITTEE ON SYSTEM ENGINEERING

Scope—Treatment of all matters in which the dominant factors are the requirements, planning, co-ordination, operation, and economics of interconnected electric generating, transmission, and distribution systems. Included in this scope shall be treatment of the following:

Interconnected system planning
Frequency and load control (joint with Power Generation Committee)
Load dispatching
Economics of system and unit operation
Engineering of system expansion
Interconnection contracts

COMMITTEE ON TRANSFORMERS

Scope—Treatment of all matters in which the dominant factors are the design, construction, and operation of transformers, reactors, and other similar equipment. Included within this scope shall be treatment of the following:

Transmission and distribution transformers
Voltage and load regulators (step and induction regulators)
Reactors and grounding transformers (joint with Protective Devices Committee)
Speciality transformers and regulating transformers
Railway service transformers
Test transformers
Constant current transformers
Insulating fluids
Insulation and dielectric problems relating to transformers
Insulators and hardware with transformers

Potential devices Bushing and Instrument Transformers	with co-ordination with Relay, Switchgear, and Instruments and Measurements Committees

Matters relating to transformers and regulators specifically designed for applications covered by certain other technical committees such as Relays, Electronics, Protective Devices, Communication, may be treated jointly with that committee if emphasis is on general principles; or exclusively by the application committee if emphasis is on the particular requirements of the application.

COMMITTEE ON TRANSMISSION AND DISTRIBUTION

Scope—Treatment of all matters in which the dominant factors are considerations of economical and technical design, theoretical and experimental performance, installation, and service operation of that part of electric power systems which serve to transmit electric energy between the generating source or substation and the service.

Treatment of all matters involving substations themselves including switching and transforming stations are not within the scope of this committee, except in the broad aspects of the application of a substation as a whole.

Treatment of matters involving industrial distribution systems shall not be included within this scope unless such systems are interconnected with an electric power utility, in which case the action shall be joint with the Committee on Industrial Power Systems.

Included in this scope shall be treatment of the following:

Overhead and underground transmission and distribution systems
Overhead conductors
Fault current studies
System stability
Lightning investigations (joint with Protective Devices Committee)
Network systems and studies
Insulated line conductors (properties related to system problems)
Structural co-ordination
Insulation co-ordination (joint with Substation Committee)
Inductive co-ordination
Corona
Towers, poles, insulators, and hardware
Capacitors (except those used for protective devices)

Science and Electronics Group

COMMITTEE ON BASIC SCIENCES

Scope—Treatment of all matters in which the dominant factor is electrophysics, and which are of such novel character as to be unapplied in any apparatus or field of application within the scopes of the other technical committees, or which are of such generality as to be significant within the scopes of several technical committees. Such subjects as general circuit theory, electrostatics, mathematical treatises, magnetics, general electrical units, and nomenclature are properly within the scope of this committee.

COMMITTEE ON COMPUTING DEVICES

Scope—Treatment of all matters in which the dominant factors are the requirements, design, construction, selection, installation, scope, and operation of machinery and devices relating to computing devices, including studies of the electromagnetic, electronic, and mechanical phenomena of such devices.

Fundamental mathematic, electronic, and properties of materials entering into these devices are not included.

COMMITTEE ON ELECTRONIC POWER CONVERTERS

Scope—Treatment of all matters in which the dominant factors are the design, construction, and operation of equipment and circuits for the electronic conversion of electric energy into other phases of electric energy in the generation, transmission, distribution, and utilization of electric power. This scope shall not include hot-cathode-type converters which have been assigned to the Hot Cathode Electronic Power Converters Subcommittee of the Electronics Committee. There shall be included in this scope treatment of the following:

Electronic converters for motor control (joint with Industrial Control Committee)
Electronic power rectifiers and inverters
Electronic frequency changers

Matters relating to electronic converters specifically designed for applications covered by certain other technical committees such as Transportation, Industrial Power Systems, Electrochemical Applications, and the committees in the Communication Group, may be treated jointly with that committee if emphasis is on general principles; or exclusively by the application committee if emphasis is on the particular requirements of the application.

COMMITTEE ON ELECTRONICS

Scope—Treatment of all matters in which the dominant factor is electronics, particularly those dealing with the design, characteristics, or behavior of devices of an electronic nature, or of the circuits associated with them. The treatment of complete equipments or systems may be considered within the scope of this committee if they depend predominantly on electronic devices for their operation. If the field of application of such equipments or systems falls also within the scope of other technical committees, action with those committees may be joint.

COMMITTEE ON INSTRUMENTS AND MEASUREMENTS

Scope—Treatment of all matters in which the dominant factor is the measurement of electrical quantities, both absolute and relative, and the measurement of other quantities by electrical methods, including the devices necessary thereto. Where novel instruments and novel methods of electrical measurement are in papers, even though measurement is not the prime objective, then action shall be joint with the respective technical committee concerned.

Telemetering is assigned primarily to the

Committee on Instruments and Measurement and handled by a joint subcommittee comprised of members of both the Committees on Substations and Instruments and Measurements. Telemetering problems in connection with automatic stations will be assigned by the chairman of the Committee on Instruments and Measurements to members of the subcommittee who are also members of the Committee on Substations. Telemetering problems of a more general nature will be assigned by him to members of both main committees, and where the problem is simply measurements it will be assigned only to members of the Committee on Instruments and Measurements (as per joint agreement between the Committees on Automatic Stations and Instruments and Measurements, January 29, 1935).

COMMITTEE ON METALLIC RECTIFIERS

Scope—Treatment of all matters in which the dominant factors are metallic rectifiers, (extended surface metallic rectifiers), particularly those dealing with the design, characteristics, and behavior of devices relating to "dry"-type rectifiers, including those used in low-power applications, those used as modulators, demodulators, detectors, and instrument rectifiers. If the field of application of such devices falls within the scopes of other technical committees, action with those committees may be joint.

COMMITTEE ON NUCLEONICS

Scope—Treatment of all matters in which the dominant factor is nucleonics, particularly that dealing with the design, characteristics, or behavior of devices of a nucleonic nature, or of the systems associated with them. The treatment of complete equipments or systems may be considered within the scope of this committee if they depend predominantly on nucleonic principles for their operation. If the field of application of such equipments or systems falls also within the scopes of other technical committees action with those committees shall be joint.

COMMITTEE ON THERAPEUTICS

Scope—Treatment of all matters in which the dominant factors are the applications of electric power to sanitation equipment, such as air-cleaning and sterilizing devices, and to the promotion of health and the analysis and treatment of disease or defects of the human body, such as X-ray equipment, diathermic equipment, cardiographs, investigations not directly applying to the human body but relating to health, and electric devices suitable for such purposes; the study of harmful effects of electric currents and radiations of electric devices upon the human body and means for the prevention of such effects, and so forth, are properly within the scope of this committee.

Where certain devices are suitable for both therapeutic and industrial purposes, such as some X-ray equipment, or for therapeutic and other scientific investigations, or for sanitation and air-conditioning of domestic and commercial premises, action shall be joint with the Industrial Power Systems Committee, the Basic Sciences Committee, or the Domestic and Commercial Applications Committee, respectively; also, when appropriate, with the Safety Committee.

INSTITUTE ACTIVITIES

1949 AIEE Fall General Meeting to Be Held in Cincinnati, Ohio

Plans for the AIEE Fall General Meeting (formerly known as the AIEE Midwest General Meeting) which is to be held at the Netherland Plaza Hotel in Cincinnati, Ohio, October 17–21, 1949, are fast materializing. Besides an outstanding technical program, the meeting committee is hard at work planning for the entertainment and comfort of all visitors.

The Entertainment Committee has great plans for the entertainment of both men and women. The stag smoker on Tuesday night and the dinner dance on Wednesday night, in the beautiful "Pavilion Caprice" of the Netherland Plaza Hotel will certainly be occasions to be remembered by all.

The Ladies Committee has arranged a diversified program that will meet every expectation and they guarantee not a single dull moment for the ladies. The General Committee is particularly hopeful that most members will make a special effort to encourage their wives to accompany them to the Fall General Meeting.

Besides the "big occasions" there will be many other entertainment features such as, ice hockey games, theatres, and some of the most luxurious night clubs in the midwest.

INSPECTION TRIPS

The Inspection Trip Committee has completed arrangements for an interesting group of inspection trips. These trips will include visits to the following places of interest:

1. Baldwin Piano Company
2. Crosley television station
3. Engineering Society of Cincinnati
4. Fisher Body plant
5. Miami Fort generating station
6. Cincinnati Machine Tool Colony, including the Cincinnati Milling and Grinding Machine, Inc., Cincinnati Bickfort Tool Company, and Cincinnati Planer Company
7. Procter and Gamble Company

TECHNICAL PROGRAM

The technical program for the Fall General Meeting is rapidly being completed. At present, 25 sessions and conferences are being planned on the following subjects:

Transmission and distribution
Rotating machinery
Electronic power converters
Relays
Insulated conductors
Conformal mapping
Railroad communication
Voltage induction
Coaxial systems
Protective devices
Substations
Radio
Speed governing
Television
Probability methods
Industrial power systems
Industrial control
System economics
Aluminum
Instruments and measurements
Machine tool industry

Cincinnati industries will be well represented, especially in the radio and television, power and machine tool fields.

It will be remembered that the Fall General Meeting is the third such meeting of the Institute. The first was sponsored by the Chicago Section in 1947, and last year Milwaukee, Wis., was host to what was then known as the Midwest General Meeting. With the inauguration of this meeting, the number of general meetings was brought up to four per year, namely, the Winter, Pacific, Summer, and Fall General Meetings. Judging from the demand for sessions and the number of papers offered, the addition of this meeting certainly seems to have been justified.

HOTEL RESERVATIONS

In the Hotel Netherland Plaza all rooms are outside rooms with tub, shower, and four station radio. Room rates per day are as follows:

Single room	$ 4.00–$10.00
Double bedroom for two	$ 8.00–$12.00
Twin bedroom for two	$ 9.00–$13.00
Suite: parlor and bedroom	$18.00–$35.00

All requests for room reservations should be sent directly to the Hotel Netherland Plaza, Fifth and Race Streets, Cincinnati 2, Ohio. Members are urged to send in their requests early. The Hotel Netherland Plaza will place overflow reservations in adjacent hotels, including the Terrace Plaza, Hotel Gibson, and Hotel Sinton at comparable rates.

MEETING COMMITTEES

Members of the Fall General Meeting Committee making arrangements are

E. S. Fields, *Chairman;* R. J. Rockwell, *Vice-Chairman,* J. P. Quitter, *Secretary;* W. H. McNutt, *Treasurer;* J. C. Strasbourger, R. E. Stoppel, F. E. Wiatt.

The chairmen of the various subcommittees are

A. C. Burroway, E. F. Nuezel, *Technical Program;* W. T. Pavely, *Inspection Trips;* S. B. Storer, *Entertainment;* J. A Noertker, *Transportation;* D. T. Michael, *Registration;* F. W. Willey, *Finance;* R. E. Colado, *Publicity;* Mrs. J. A. Noertker, *Ladies;* H. E. Barnett, *Hotel and Equipment.*

The Herman Schneider Foundation building, home of the Engineering Society of Cincinnati, and headquarters of the Technical and Scientific Societies Council of Cincinnati, which is to be visited on an inspection trip during the Fall General Meeting

Committee for 1950 Summer and Pacific General Meeting Named

Past President Everett S. Lee has appointed the following persons to the general committee which will make plans for the Summer and Pacific General Meeting, to be held in Pasadena, Calif., June 12–16, 1950: Fred Garrison, *Chairman;* M. V. Eardley, *Vice-Chairman;* E. L. Bettannier, *Secretary;* J. H. Vivian, *Treasurer.*

The following have been named subcommittee chairmen:

Harry Lott, *Technical Program;* E. W. Morris, *Registration;* Mark Sawyer, *Hotels;* E. W. Rockwell, *Transportation;* Bradley Cozzens, *Finance;* William Kyte, *Publicity;* G. F. Rucker, *Trips;* Dr. G. T. Harness, *Student Relations;* H. S. Warren, *Sports;* Chester Schweers, *Entertainment and Program;* Mrs. Fred Garrison, *Ladies' Entertainment.*

Next year, it is planned to combine the Summer General Meeting and the Pacific General Meeting into one. It will be titled the Summer and Pacific General Meeting.

New Prize Rules for AIEE Technical Papers Approved by AIEE Board of Directors

The following constitute the new rules for the award of prizes for AIEE technical papers as approved by the AIEE Board of Directors at their annual meeting on June 23, 1949, during the AIEE Summer General Meeting in Swampscott, Mass.

INTRODUCTION

The AIEE has established a series of prizes which are available for annual award to members for outstanding papers presented at its meetings.

Each prize consists of a sum of money and/or a Certificate of Award. Appropriate recognition will be given in *Electrical Engineering* and in the AIEE "Year Book."

PRIZES

The following summarizes the awards available each year in each classification.

1. *Institute*

Class	First Prize	Second Prize
(*a*). Power	$100 and certificate	Certificate
(*b*). Industry	$100 and certificate	Certificate
(*c*). Communication	$100 and certificate	Certificate
(*d*). General Application	$100 and certificate	Certificate
(*e*). Science and Electronics	$100 and certificate	Certificate
(*f*). Best Student Paper	$100 and certificate	Certificate

2. *District*

Class	First Prize	Second Prize
(*a*). Best paper, any class	$75 and certificate	$50 and certificate
(*b*). Best paper presented by undergraduate Student member in District competition	$25 and certificate	Certificate

3. *Section*

$100 to be divided at the discretion of the Section with a maximum of $50 for any one prize, and certificate for each winner.

4. *Branch* (*Undergraduate*)

Class	First Prize	Second Prize
(*a*). Best Paper	$10 and certificate plus an allowance of seven cents per mile one way to the District Student prize paper competition	Certificate

Coauthors will split prize; each will receive a certificate. Equivalent gift may be substituted for the monetary prize.

PERSONS ELIGIBLE

To compete for these awards requires only that the author (or one of the coauthors) be an eligible member of the Institute, a Fellow, Member, Associate, or enrolled Student member in good standing, and that the paper be presented at a qualified technical meeting of the AIEE; the Institute Winter, Summer, Fall, or Pacific General Meeting; District meeting; Section (including technical group and Subsection) meetings; or Branch meetings. District, Section, and Branch prizes will be limited to authors who are resident within the respective territories covered.

ENTRANCE REQUIREMENTS

All papers presented at District, Section, Branch, or Student meetings will be considered for *Institute* and *District* awards, if submitted in triplicate to the Institute or District Secretary before September 15, of the following administrative year, and accompanied by a written statement as to when and where the papers were presented. The date of consideration for District awards may be varied by the District Executive Committee at its discretion.

When three or more papers are submitted for *Section* or *Branch* competition to the respective secretaries, arrangements shall be made for presentation before the Section or Branch at a meeting set aside for that purpose and committees selected to judge each such contest.

All papers approved by the Technical Program Committee which are presented at the Winter, Summer, Fall, or Pacific General Meetings of the Institute will be considered for *Institute* Prizes without formal offering in competition.

All papers approved by the Technical Program Committee as described in the foregoing and those which are approved by the Technical Program Committee and presented at District meetings will be considered for *Institute* and *District* prizes without formal offering in competition.

GENERAL INFORMATION

1. *Presentation of Awards*

Presentation of awards will be made: annually at the regular Winter General Meeting for Institute prizes; at a meeting within the District for District prizes or at a meeting designated by the District Executive Committee; at appropriate Section meetings for Section prizes; and at Branch meetings for Branch prizes.

2. *Where Insufficient Papers Are Submitted*

When in the opinion of the Committee on Award the number of papers in a given class is not sufficient to constitute a real competition, the award will be withheld. In this case these papers will be considered with others presented in the following year.

3. *Date of Presentation*

All prizes will be awarded on the basis of papers presented during the administrative year, August 1 to July 31. (Except as varied by District Executive Committee to cover District competition and by Sections to cover Section competition.)

BASIS OF GRADING

1. *Institute, District, and Section Papers*

The valuations which govern the grading of papers for the purpose of awarding best paper prizes are

Analysis of subject—15 per cent
Logical presentation—15 per cent
Originality—15 per cent
Unity—15 per cent
Value in electrical engineering field—40 per cent
(*Except in Section competition where value will be rated 20 per cent and oral presentation 20 per cent*)

2. *District Branch and Branch Papers*

As the objective of Student papers differs from that of the more advanced papers, the basis of grading given in the following has been adopted. It is not the primary purpose of Student papers to contribute to the technical advancement of the profession; they should constitute a vehicle for the training and stimulation of future contributors to the profession. To this end greater emphasis has been placed on written presentation and the exercise of engineering thinking than on technical value. Written presentation shall be given a weighting of two compared with one for oral presentation.

A. *Basis for Grading Written Presentation:*

Originality—20 per cent
Survey of subject (analytical procedure)—15 per cent
Importance—15 per cent
Appropriateness—10 per cent
Mode of Expression—

(*1*). Logical organization of material for clarity, forcefulness, and interest. Appropriate headings are essential. (10 per cent)

(*2*). Concise and coherent expression of thoughts in good English and with proper choice of words. (10 per cent)

(*3*). Effective and judicious use of pictorial and graphical presentation. (10 per cent)

Adequate introduction and closure—10 per cent

B. *Basis of Grading for Oral Presentation:*

Speaking technique—35 per cent
Style (organization of material)—35 per cent
Introduction and conclusion—15 per cent
Discussion—15 per cent

COMMITTEE ON AWARD OF INSTITUTE PRIZES

1. *Institute*

The Committee on Award of Institute Prizes shall be appointed by the Institute President and shall consist of not less than five Members or Fellows of the Institute.

2. *District*

The Committee on Award of District Prizes shall be appointed by the District Vice-President and shall consist of not less than three Members or Fellows of the Institute. Judges of oral presentation of Student papers need not be same as judges of written presentation and they may include Associate or non-Institute members when necessary.

3. *Section*

The Committee on Award of Section Prizes shall be appointed by the Section Chairman and shall consist of not less than three Members or Fellows of the Institute.

4. *Branch*

The Committee on Award of Branch Prizes shall be appointed by the Student Counselor and shall consist of not less than three Associates, Members, or Fellows. When necessary, a non-Institute member may be selected.

EFFECTIVE DATE OF RULES

These rules become effective with the administrative year beginning August 1, 1949.

PROCEDURE FOR REVISION

These rules are subject to revision annually by the Board of Directors of the Institute.

AIEE Textile Industry Conferences Held in Boston and Atlanta Last May

Electrical engineering problems in the textile industry was the subject of two AIEE technical conferences held last May. The first took place in Boston, Mass., at the Hotel Kenmore, May 3, 1949, and the second in Atlanta, Ga., at the Young Men's Christian Association auditorium of the Georgia Institute of Technology, May 27–28, 1949. These gatherings represented two more conferences in the series of ten held since the special AIEE conference type of meeting was started in 1948 (*EE, Feb '48, p 189*). This type of meeting is designed to explore thoroughly a limited field and to afford specialists in that field an opportunity to discuss mutual technical problems.

In this instance, two meetings were held on the one subject, one in each of the two principal geographic areas concerned with the textile industry, so that engineers in the industry could find it convenient to attend.

BOSTON CONFERENCE

The Boston meeting was sponsored by the Textile Industry Subcommittee of the Committee on General Industry Applications in co-operation with the Boston Section of AIEE. Seven papers and two moving pictures were presented during the two sessions of the meeting. Subjects covered by the papers ranged from cloth production in the loom to cloth finishing, including cloth printing, straightening, and electronic instrumentation as an aid to these and other processes.

In spite of the change in meeting place of the conference from the Massachusetts Institute of Technology, Cambridge, Mass., to the Kenmore Hotel and the inclement weather, some 65 persons attended.

F. D. Snyder, Westinghouse Electric Corporation, Boston, Mass., who is chairman of the Textile Industry Subcommittee, opened the meeting by reviewing the work of the subcommittee and enumerating some of the problems facing the textile industry. He also emphasized the mutual benefit of exchanging ideas and discussing problems in such a meeting as was being held then.

ATLANTA CONFERENCE

Approximately 95 persons, mostly engineers and executives of Southeastern textile mills, attended the conference in Atlanta, the first such conference in the Southeast.

Again the meeting was sponsored by the Textile Industry Subcommittee of the General Industry Applications Committee, this time in co-operation with the Engineering Extension Division of the Georgia Institute of Technology and the Georgia Section of AIEE.

H. S. Colbath, Plant Engineer, Bibb Manufacturing Company, Macon, Ga., presided over the first session, in which electronic instrumentation, loom research, and electric drives for looms, were discussed.

C. A. Collier, Vice-President, Georgia Power Company, Atlanta, Ga., was the speaker at the luncheon. He talked on the responsibilities of business towards its employees, and the advantages of a healthy and contented working force.

Harry C. Uhl, Electrical Engineer, Avondale Mills, Sylacauga, Ala., directed the proceedings at the second session on May 27. Fire hazards, methods of obtaining traverse motion, and electric equipment for textile machines were among the topics covered.

Presiding over the last session, held May 28, was S. A. Bobe, Westinghouse Electric Corporation, Atlanta, Ga. Papers on electrostatic air cleaning and textile education in Georgia were delivered.

Both Mr. Bobe and Mr. Uhl are members of the Textile Industry Subcommittee.

There will be no publication in pamphlet form of the proceedings of the Boston and Atlanta conferences. However, some digests appear in this issue (*pages 797–8*).

Future AIEE Meetings

Fall General Meeting
Netherland Plaza Hotel, Cincinnati, Ohio
October 17–21, 1949
(*Final date for submitting papers—closed*)

AIEE/IRE Conference on Electronic Instrumentation in Nucleonics and Medicine
Hotel Commodore, New York, N. Y.
October 31–November 2, 1949

Winter General Meeting
New York, N. Y.
January 30–February 3, 1950
(*Final date for submitting papers—November 1*)

AIEE Conference on Electric Power Supply for Industrial Plants
Pittsburgh, Pa.
April 1950

AIEE Conference on Meeting Load Demands With Limited Reserve
Pittsburgh, Pa.
April 1950

AIEE Conference on Electrical Engineering Problems in the Rubber and Plastics Industry
Akron, Ohio
April 1950

AIEE Conference on Electric Welding
Detroit, Mich.
April 5–7, 1950

North Eastern District Meeting
Providence, R. I.
April 26–28, 1950
(*Final date for submitting papers—January 26*)

Great Lakes District Meeting
Jackson, Mich.
May 11–12, 1950
(*Final date for submitting papers—February 10*)

Summer and Pacific General Meeting
Huntington Hotel, Pasadena, Calif.
June 12–16, 1950
(*Final date for submitting papers—March 14*)

1950 Fall General Meeting
Oklahoma City, Okla.
October 23–27, 1950
(*Final date for submitting paper—July 25*)

Secretary Henline to Attend London Conference of Engineering Societies

AIEE Secretary H. H. Henline has been designated to represent AIEE at a conference of representatives of engineering societies of Western Europe and the United States which is to be held in London, England, September 19–23, 1949. This is the first AIEE participitation in such a gathering which will include representatives of engineering societies from Belgium, Denmark, France, Holland, Norway, Sweden, Switzerland, the United Kingdom, and the United States.

The aims and objects of the conference include

1. To develop direct relationships between the participating societies on a basis of mutual understanding for the advancement of engineering science.
2. To provide a means whereby questions of domestic concern to the participating societies can be discussed.
3. To give all proper support to each participating society within its own country.
4. To act as a focus of the professional engineering opinion of the participating societies.
5. To co-operate, as may be considered desirable, with international organizations and to support and supplement their work.

Long an officer of the Institute, Mr. Henline joined the headquarters staff as assistant national secretary in 1927, was appointed national Secretary in 1933, and has held that post ever since. His long experience in Institute affairs should prove to be extremely valuable in the discussion of mutual problems with these other engineering organizations.

Lamme Medal Nominations to Be Submitted by December 1

Members of the Institute again are reminded that they have an opportunity to submit nominations for the 1949 Lamme Medal. All nominations must be received not later than December 1, 1949. Details regarding qualifications have been published in *Electrical Engineering* (*EE, June '49, p 547*).

The 1948 Lamme Medal was awarded to Dr. V. K. Zworykin, Vice-President and Technical Consultant, RCA Laboratories Division, Radio Corporation of America, Princeton, N. J., "for his outstanding contribution to the concept and design of electronic apparatus basic to modern television." The medal was presented to him at the Summer General Meeting (*EE, Aug '49, p 698*). Full texts of the addresses at the presentation ceremony appeared in the August issue (*pp 668–72*).

Vice-President G. W. Bower Addresses Lima Subsection

The first annual meeting of the Lima Subsection (Dayton Section) was held June 10, 1949, in the Ohio Power Company Auditorium. This was an outstanding meeting with Vice-President G. W. Bower speaking on "Institute Affairs." C. G. Veinott, Vice-Presidential nominee from the Middle Eastern District to succeed Mr. Bower, was also present. Results of

New Officers of the Lima, Ohio, Subsection

Newly elected officers of the Lima, Ohio, Subsection, Dayton Section, are, left to right: F. C. Horn, Lima Electric Motor Company, Director; W. R. Ankrom, Ohio Power Company, Director; B. O. Austin, Westinghouse Electric Corporation, Chairman; O. M. Swain, Westinghouse Electric Corporation, Secretary-Treasurer; E. S. Reed, Westinghouse Electric Corporation, Assistant Secretary. H. C. Doughty, Ohio Power Company, Vice-Chairman, does not appear in this picture

the election of officers for the Subsection were announced.

B. O. Austin, Manager, Control Section, Aircraft Engineering Department, Small Motor Division, Westinghouse Electric Corporation, was named Chairman of the Subsection for the coming year. Other officers elected were H. C. Doughty, Ohio Power Company, *Vice-Chairman;* O. M. Swain, Westinghouse Electric Corporation, *Secretary-Treasurer;* E. S. Reed, Westinghouse Electric Corporation, *Assistant Secretary;* and F. C. Horn, Lima Electric Motor Company, *Director.* W. R. Ankrom, Ohio Power Company, also continues as Director another year.

Chairman W. R. Appleman and several members of the Dayton Section attended the meeting. Also present were Chairman Walls and a large group from the Ohio Northern University Student Branch.

A social hour with refreshments at the close of the meeting allowed the members to meet the speaker and informally discuss Institute activities.

Philadelphia Section Holds Annual Prize Papers Night

At the final meeting of the 1948–49 season, the AIEE Philadelphia Section held its annual "Prize Papers Night." The winning papers in the section competition were presented by their authors at the meeting. First honor awards of $25 each were given for the following papers:

Power Systems: "Transient and Cyclic Load Temperature Calculations for Cable Systems," by J. H. Neher, Philadelphia Electric Company

Electronics and Communications: "Automatic Range-Adjusting Radio Sonde Recorder," by G. E. Beggs, Jr., Leeds and Northrup Company

Instruments and Measurements: "Graphical Method for Estimating the Performance of Distance Relays During Faults and Power Swings," by A. R. Van C. Warrington, General Electric Company

Basic Sciences: "Design of a Digital Computing Machine," by T. K. Sharpless, Technitrol Engineering Company

Student Papers: "Method of Indicating Phase Displacement Between Periodic Electrical Waves," by M. M. Carpenter, Jr., University of Delaware

M. M. Carpenter, Jr., of the University of Delaware, was awarded a special prize of ten dollars for the best presentation.

COMMITTEE NOTES •

Editor's Note: This department has been created for the convenience of the various AIEE technical committees. It will include brief news reports of committee activities and proposed plans for such projects as special technical conferences and sessions at general meetings. Items for this department, which should be as short as possible, should be forwarded to R. S. Gardner at AIEE Headquarters, 33 West 39th Street, New York 18, N. Y.

Science and Electronics Group

National Instrument Conference Scheduled for St. Louis

The Fourth National Instrument Conference and Exhibit will be held in St. Louis, September 12–16, 1949. It will be sponsored by the Instrument Society of America, and technical sessions on various phases of instrumentation are to be held during the conference. These sessions will be arranged by the Instrument Society of America, the AIEE Committee on Instruments and Measurements, the Industrial Instruments and Regulators Division of the American Society of Mechanical Engineers, and the American Institute of Physics.

Three previous conferences and exhibits were held; one in Pittsburgh, Pa., one in Chicago, Ill., and last year one was held in Philadelphia, Pa. Last year was the first year that AIEE participated in the conferences. Two sessions were arranged by the Instruments and Measurements Committee and the attendance at each session was approximately 300. This year, through the efforts of J. P. Scott, of the Instruments and Measurements Committee, who was appointed Chairman of the committee to make the necessary arrangements for AIEE participation in the conference, two technical sessions have been scheduled.

On Thursday, September 15, 1949, at 2:30 p.m., the AIEE session on electronic instruments will be held under the chairmanship of J. G. Reid, Jr., National Bureau of Standards, Washington, D. C. Papers to be presented include

A Wide Band D-C Amplifier Stabilized for Gain and for Zero. *A. J. Williams, Jr., W. G. Amey, W. McAdam,* Leeds and Northrup Company, Philadelphia, Pa.

A Regulated, Adjustable Low-Voltage D-C Supply for Electrolysis and Other Use. *M. L. Greenough, W. E. Williams, Jr.,* National Bureau of Standards Washington, D. C.

Radiosonde Instrumentation. *Walter R. Beam,* Washington Institute of Technology, Washington, D. C.

Velocity and Flow Measurements With an Improved Thermal Instrument. *C. E. Hastings,* Hastings Instrument Company, Jampton, Va.

On Friday, September 16, 1949, at 2:30 p.m., an AIEE session on electrical instruments and measurements is scheduled. Chairman of the session will be J. P. Scott, Union Electric Company, St. Louis, Mo. Four papers are to be presented, including

A New Thermal Converter for Telemetering and Totalizing. *William C. Downing,* Sangamo Electric Company, Springfield, Ill.

A New Expanded Scale A-C Voltmeter. *N. P. Millar,* General Electric Company, West Lynn, Mass.

Electrical Measuring Instruments, Developments and Standardization. *D. A. Young,* Westinghouse Instruments and Engineering Department, Newark, N. J.

V-2 Rocket Instrumentation. *George J. Fiedler,* Sverdrup and Parcel Inc., Consulting Engineers, St. Louis, Mo.

Mr. Scott has been very ably assisted in organizing the AIEE program for the conference by J. G. Reid, Jr., and Dr. W. R. Clark, who are representing the Instruments and Measurements Committee, and the following members of the St. Louis Section of the AIEE, who have been appointed to the committee to take care of general arrangements: R. E. Schoetker, R. W. Gaskins, E. S. Rehagen, C. W. Schemm, and P. R. Watson.

The Committee on Instruments and Measurements takes this opportunity to express its appreciation of the splendid co-operation of the St. Louis Section under the guidance of its Chairman, R. C. Horn, in making the necessary arrangements for the technical committee's participation in this conference.

Joint Subcommittee on Telemetering. *(C. K. Duff, Chairman; W. K. MacAdam, Secretary.)* This joint subcommittee is comprised of members of the Instruments and Measurements Committee and of the Substations Committee, to co-ordinate matters relating to telemetering, in which the AIEE has maintained a specific interest for some 20 years.

In 1948 the joint subcommittee completed revision of a report on "Telemetering, Supervisory Control, and Associated Circuits," and it is now available from AIEE.

(Orders for this report together with remittance of $2 per copy, $1 to AIEE members, should be sent to AIEE Order Department, 33 West 39th Street, New York 18, N. Y.).

During the past few months the subcommittee has been making contacts with a recently formed body known as the National Telemetering Forum, which is interested mainly in telemetering from mobile devices such as rockets. This field is emerging only now from security regulations, and an insight into it was given in a session on radio telemeter instrumentation sponsored by the Joint Subcommittee on Electronic Instruments at the recent Summer General Meeting at Swampscott, Mass. The two joint subcommittees have arranged for close liaison with the National Telemetering Forum, whose chairman, W. J. Mayo-Wells, is a member of the AIEE and recently has accepted membership on the Joint Subcommittee on Telemetering.

The subcommittee is working at present on definitions of telemetering terms, a subject which is also active among members of the National Telemetering Forum. A number of revised definitions and new terms have been suggested. A proposed new term of broader application is the coined word *metrant*, to signify "the thing being measured."

Joint Subcommittee on Nucleonic Instruments. (*G. W. Dunlap, Chairman; E. E. Goodale, Secretary.*) The subcommittee sponsored a conference session on nucleonic instruments at the Summer General Meeting at Swampscott, Mass.

Previously, similar conferences had been sponsored at the 1948 Winter General Meeting in Pittsburgh, and at District meetings in Spokane and Washington. It is planned to sponsor sessions in the future only at the general meetings, but to offer assistance to any local group desiring to arrange such programs.

In co-operation with the other subcommittees of the Nucleonics Committee, this subcommittee is arranging to sponsor a series of papers in *Electrical Engineering* on special subjects of interest to the membership. The subcommittee will concern itself with papers on nucleonic instruments.

The subcommittee members also are cooperating with the National Research Council on the forthcoming Nucleonics Glossary to the extent of review and suggestion.

Power Group

Committee on Transmission and Distribution. (*I. W. Gross, Chairman; S. B. Crary, Vice-Chairman; R. E. Pierce, Secretary.*) An excellent example of co-operation between the Edison Electric Institute and AIEE is offered by the activity that the Transmission and Distribution Committees of the two organizations are carrying out jointly. Subcommittees of the two committees have just completed a questionnaire which will be submitted to the utilities of the country having transmission systems in excess of 100 kv. The Edison Electric Institute will circularize utilities having membership in their organization, and AIEE will circulate other utilities. This activity will cover the characteristics of transmission lines in this range, the types of faults and their causes, and the frequency of occurrence of such faults. When completed, the analysis will provide information of value in improving service and in guiding the design and layout of future transmission systems.

AIEE PERSONALITIES.....

R. S. Gardner (A '49) has joined the headquarters staff of AIEE where his duties are assisting the AIEE Secretary in matters covering technical committee activities and directing the administrative and procedural aspects of Special Technical Conferences. In addition, he is the Secretary of the following committees: Technical Activities, Industry Co-ordinating, Power Co-ordinating and Electric Welding. Also, he is a member of the Board of Directors of the Engineering Societies Personnel Service, Inc., and a Military Engineer member of the American Society of Military Engineers. Mr. Gardner is a native of Virginia, graduating from the Virginia Polytechnic Institute in 1922 with a Bachelor of Science degree in electrical engineering. He subsequently joined the General Electric Company in Schenectady, New York, as Test Engineer. Later, he did design, research, and production engineering for the company, where he remained until 1926. After a year, as Electrical Layout Engineer with the Ryan Construction Company, Troy, New York, he became associated with Underwriters Laboratories, Inc., New York, N. Y., in 1927, as an electrical engineer. Seven years afterwards, he joined the firm of M. R. Scharf, Consulting Engineer, New York, N. Y., where he handled the evaluation of electrical substation equipment, and in 1935 he was designated Engineer-in-Charge of Federal Government construction (including electrical design) programs and compiling of engineering statistical data in New York, N. Y. Here, his duties were largely administration, planning, checking and approving design and project work, executive conferences, engineering reports, and so on. During that time, he supervised personnel numbering approximately 200, including engineers, designers, draftsmen, technicians, foremen, skilled tradesmen, clerks, and so forth. From 1941 to 1944, Mr. Gardner was a production analyst for the War Production Board, contacting manufacturers in the production control of war items (mostly electrical) and then a specification engineer for the Treasury Department. Prior to joining the AIEE Staff, he worked as assistant chief engineer and as an electrical designer for New York companies, handling electronic and radar equipment, and electric generating power plants respectively, and also as a self-employed industrial consultant. Mr. Gardner stands ready to serve officers, members, and committees of the Institute.

R. S. Gardner

H. M. Trueblood (A '17, F '40), Assistant Director of Transmission Engineering, Bell Telephone Laboratories, New York, N. Y., has retired after 31 years of service with the Bell System. His specialty was the development of methods and procedures for the protection of telephone service, plant, and personnel from the effects of induction from power and electrified railway circuits. As Protection Development Director, to which post he was named in 1938, and which he held for ten years, he was also in charge of development work on protection from lightning and from corrosion damage to cables. Dr. Trueblood has been a member and secretary since its organization of the Joint Subcommittee on Development and Research of the Edison Electric Institute and the Bell System. During World War II, Dr. Trueblood did work concerned with field testing of radar systems and the development of radar indicators. Beginning his career in 1903, he became a field officer with the United States Coast and Geodetic Survey, subsequently teaching electrical engineering at the University of Pennsylvania, Philadelphia. He joined the Engineering Department of American Telephone and Telegraph Company in 1917, but left after a few months to engage in research at the United States Naval Experimental Station, New London, Conn. He returned to the Bell System in 1919. Mr. Trueblood served on the following committees: Protective Devices, 1934–37; Transmission and Distribution, 1938–49; Board of Examiners, 1943–49.

William L. Dubilier (A '19, F '25), Technical Director and founder of the Cornell-Dubilier Electric Corporation, South Plainfield, N. J., recently received two high French honors at that country's embassy in New York, N. Y. One was the Honorary Medal of the Association des Ingenieurs-Docteurs de France. The Diploma of the Officer of the Academy and the Order of Academic Palms, presented by decree of the French government, was Mr. Dubilier's second award. The scientist was honored

William Dubilier

for two services to France, one rendered during World War I, and the other completed just recently. In his later service, he assisted in providing emergency relief for the serious shortage of power in the French nation. Working through the Cornell-Dubilier Electric Corporation, he was responsible for French power companies' obtaining 40,000 kw. He also assisted in building up the country's capacitor industry. Mr. Dubilier's service in World War I was the development, at the request of the government of France, of a submarine detector, which obtained the location, speed, and direction of the target. Holder of over 300 patents, the scientist's most famous contribution to the electrical industry was his development of the mica capacitor, a device almost as important in modern electronics as the radio tube itself. Born in New York, N. Y., July 25, 1888, Mr. Dubilier studied at Cooper Institute and the University of Paris. Chief electrician for the Continental Wireless and Telegraph Company in 1908, he was President and Technical Director of the Commercial Wireless Telegraph and Telephone Company, Seattle, Wash., by 1910. In London, England, in the same year, he organized the Dubilier Condenser Company, Limited. Returning to New York, N. Y., he founded the Dubilier Electric Company in 1913, which firm is now the Cornell-Dubilier Electric Corporation. Author of a number of technical articles, Mr. Dubilier is a member of the Institute of Radio Engineers and the Franklin Institute.

H. E. Dralle (A '41) is now Eastern Engineering and Service Manager, Westinghouse Electric Corporation, New York, N. Y. Formerly Assistant Manager, he replaces **S. L. Henderson** (A '12, M '34), who has retired. Mr. Henderson, a Member for Life, had been with Westinghouse since 1910. Also retired recently is **H. K. Smith** (M '35, F '44), who was Northwestern Engineering and Service Manager at the company's Chicago, Ill., office. Succeeding to Mr. Smith's former position is **D. E. Inman** (A '38, M '45). **M. L. Gardner** (A '40, M '46) fills Mr. Inman's previous post of Engineering Manager at East Pittsburgh, Pa. For the last four years, Mr. Gardner had been Supervisor of Industrial and Central Station Engineering in Westinghouse's, New York, N. Y., Branch. Mr. Henderson has served on the Electrical Machinery, the Technical Program, and the Education Committees. Mr. Inman has been a member of the Industrial Control Committee, and the Publication Committee. Mr. Dralle has belonged to the Land Transportation Committee. Mr. Smith has served on the Membership and Transfer Committees.

J. P. Growdon (A '12 M '20), Chief Hydraulic Engineer, Aluminum Company of America, Pittsburgh, Pa., has been awarded the honorary degree of Doctor of Engineering by the University of Nebraska. A graduate of that institution, he has been with the Aluminum Company of America since 1925, designing and directing construction of most of the large hydroelectric dams built by the company to furnish power for its aluminum plants. Just prior to World War II, his technical assistance helped make possible the construction of the United States Navy's huge underground oil storage project in Hawaii, where 20 great cylindrical vaults were carved out of solid rock, entirely underground. He was awarded the Navy's Certificate of Merit for his contributions to this undertaking. Mr. Growdon is a Member for Life.

E. J. Thimme (A '27, M '29), until recently Division Superintendent, Passaic Division, Public Service Electric and Gas Company, Newark, N. J., has been named Industrial Relations Manager for the utility. In other company changes, **C. L. Dudley** (A '23, M '29), formerly Division Superintendent, Essex Division, has become Assistant General Superintendent of Distribution; **Oscar Bauhan** (M '40), formerly Assistant Transmission and Substation Engineer, has been designated Transmission and Substation Engineer; and **Theodore Seely** (A '41), until recently Transmission and Substation Engineer, has filled the position of Division Superintendent, Essex Division. Each of the four men began working for the company immediately after leaving college, Mr. Thimme, Mr. Bauhan, and Mr. Seely in 1923, and Mr. Dudley in 1920. Mr. Dudley is a past member of the Electrochemistry and Electrometallurgy Committee.

W. J. Lyman (A '25, F '43) has been appointed Manager, Planning and Development Department, Duquesne Light Company, Pittsburgh, Pa. Previously, he was Engineering Assistant to the Manager of that department. Named as Consultant to Mr. Lyman is **E. A. Hester** (A '18, F '47). Mr. Hester has been with the utility since 1926. From 1941 to 1944, he served with the War Production Board. Mr. Lyman joined Duquesne Light in 1924. He has served on the Membership Committee and the Power Generation Committee. Mr. Hester is a past member of the Protective Devices, the Meetings and Papers, and the Electric Welding Committees.

Tomlinson Fort (A '27, M '35), for six years Manager, Central Station Department, has been made Manager of the Apparatus Sales Department, Westinghouse Electric Corporation, East Pittsburgh, Pa. Named to handle Westinghouse's Industrial Products, are **R. C. Bergvall** (A '24, M '41) and **W. W. Sproul** (A '42). Mr. Sproul, former Sales Manager of the company's Transformer Division at Sharon, Pa., assumes the duties of Sales Manager in East Pittsburgh. Assistant to the Vice-President in Charge of Engineering for the past 11 years, Mr. Bergvall has become Engineering Manager. Mr. Bergvall has served on the Standards Council of the American Standards Association and the Protective Devices, the Standards, and the Nucleonics Committees.

S. G. Hibben (A '34, M '45), of the Westinghouse Electric Corporation, Bloomfield, N. J., has been elected Vice-President of the Illuminating Engineering Society. Other new officers are: **E. M. Strong** (A '26, M '40) of Cornell University, Ithaca, N. Y., Treasurer; **A. H. Manwaring** (A '40, M '46), Philadelphia (Pa.) Electrical and Manufacturing Company, who becomes General Secretary; and **R. L. Biesele, Jr.** (A '45, M '48), of Southern Methodist University, Dallas, Tex., Director. Their duties will begin October 1, 1949. Both Mr. Hibben and Mr. Strong have been active AIEE committee members. Each has served on the Production and Application of Light, Standards, and Technical Program Committees, to name only a few.

D. M. Jones (A '21), Manager, Central Station Engineering Divisions, General Electric Company, Schenectady, N. Y., recently retired after 32 years with the company. He has filled his last post since 1938. Replacing Mr. Jones is **W. J. McLachlan** (A '40, M '45), who formerly was an Assistant Manager in the same department. The new Manager joined General Electric in 1924. Mr. Jones has served on the Technical Program Committee and the Power Generation Committee.

L. M. Robertson (A '27, F '45), Assistant Superintendent, Hydroelectric Production and Transmission Department, Public Service Company of Colorado, Denver, has been elected President of the Colorado Engineering Council. Formerly, he served as Vice-President of the group, which represents 3,000 engineers in the state of Colorado. Vice-President of AIEE, 1945–47, Mr. Robertson has been a member of the following committees: Transmission and Distribution; Rotating Machinery; and Education.

R. A. Millikan (M '22, HM '33), retired executive head of the California Institute of Technology, Pasadena, has received the Presidential Medal of Merit. The award was in recognition of "exceptionally outstanding conduct" in the field of rocket and jet propulsion development. A 1922 Edison Medalist, Dr. Millikan has served on the Electrophysics Committee and the Edison Medal Committee.

E. E. Ellis (A '49), former Engineer-in-Charge of Sales of the Motor and Generator Section, Allis-Chalmers Manufacturing Company, Milwaukee, Wis., has been named

Manager of that Section. **V. J. Egan** (A '39, M '47) succeeds to Mr. Ellis' previous position. **H. H. Roth** (A '40) has been appointed Engineer-in-Charge of the Large Generator Sales Group. For the last two years, he was Application Engineer in the Generator Group of the Motor and Generator Section.

H. E. Strang (A '28, F '45), until recently Engineering Manager of the Affiliated Manufacturing Companies Department of the General Electric Company has been named Manager of the Apparatus Department's Meter and Instrument Divisions at Lynn, Mass. Mr. Strang began his career with General Electric in 1925. Some of the committees on which he has served are: Protective Devices; Standards, Technical Program; Award of Institute Prizes; and Management.

R. S. Fleshiem (A '26, M '36) has been promoted from Manager of the Electrical Department to Assistant to the Executive Vice-President of the General Machinery Division of the Allis-Chalmers Manufacturing Company, Milwaukee, Wis. **R. M. Casper** (M '40), formerly Manager of the Motor and Generator Section, has assumed Mr. Fleshiem's previous duties. Mr. Fleshiem has been with Allis-Chalmers since 1904, and Mr. Casper, since 1936.

H. F. Dart (A '20, M '26), Office Manager, Electronic Tube Engineering Department, Westinghouse Electric Corporation, Bloomfield, N. J., has been elected Chairman of the New York section of the Institute of Radio Engineers for a term of one year. A member of that society since 1920, he joined the Westinghouse staff in 1922. He served on the AIEE Electronics Committee, 1948–49.

P. D. Wagoner (A '02), Chairman of the Board and Chief Executive of the Underwood Corporation, New York, N. Y., has received an honorary Doctor of Engineering degree from his alma mater, the Stevens Institute of Technology, in Hoboken, N. J. He is an 1896 mechanical engineering graduate. Associated with the Underwood Corporation and its predecessor companies for over 30 years, he is a Member for Life.

H. H. Cochrane (M '43), Chief Engineer, Montana Power Company, Butte, has retired after 50 years of service. **A. C. Pratt** (A '03, M '12), formerly Assistant Chief Engineer, retired at the same time. Mr. Pratt is a Member for Life. Both have been retained by the company as full-time consultants. Recent appointments made by Montana Power are: **C. H. Kirk** (A '43) to Superintendent of Transmission and Distribution; and **H. K. Dickinson** (A '44) to Electrical Engineer.

W. K. Scott (A '42, M '44), until recently Assistant Superintendent of Construction, Columbia Steel Company, Pittsburg, Calif., has been designated Electrical Engineer and will work in Oakland, Calif. He has been identified with Columbia for 25 years.

W. M. McKie (A '41, M '47) now is working in the Toronto district office of the Canadian General Electric Company, Limited, Toronto, Ontario, where he is responsible for the sales engineering of heavy industrial equipment in the area between North Bay and Saulte Ste. Marie. Formerly, he was Manager of the Electronic and Rectifier Section at the company's head office.

I. W. Borda (M '39) and **W. R. Van Steenburgh** (A '21) have been appointed Vice-Presidents of the Okonite Company, Passaic, N. J. With Okonite since 1924, Mr. Borda continues as Manager of the Pacific Coast District in San Francisco, Calif. Mr. Van Steenburgh, who joined the firm in 1917, retains his duties as Manager of the North-East Sales District in New York, N. Y.

W. W. Ege (A '23, M '32), previously General Manager of Sales, has been named to the newly created position of Vice-President, Sales, with the Copperweld Steel Company, Glassport, Pa. Other promotions are **F. E. Leib** (M '44) to Assistant to Vice-President, Sales, and **P. A. Terrell** (M '30) to Assistant Vice-President. Before, Mr. Leib was Assistant General Manager of Sales, and Mr. Terrell was Assistant to the Executive Vice-President.

A. S. Albright (M '37, F '43), Controller of the Detroit (Mich.) Edison Company since 1943, has been elected Treasurer of the utility. He has been with the firm since 1912, when he was employed as an engineer in the statistical department. Mr. Albright has served on the Instruments and Measurements and the Basic Sciences Committees.

F. M. Bilhimer (M '41) engineer with the Equitable Life Assurance Society, New York, N. Y., has been elected President of the New York Chapter of the National Society of Professional Engineers. Also, **B. E. Anderson** (M '35, F '45), electrical engineer at Ebasco Services, Inc., New York, N. Y., was voted Vice-President.

F. K. McCune (A '33, M '43), former Assistant to the General Manager, Apparatus Department, has been appointed Assistant General Manager of the Nucleonics Department, General Electric Company, Schenectady, N. Y. With General Electric since 1928, Mr. McCune served on the Transfers Committee, 1946–48.

C. W. La Pierre (A '28, M '43), formerly Vice-President in Charge of Engineering, American Machinery and Foundry Company, New York, N. Y., is now assistant Manager of the Aircraft Gas Turbine Divisions, General Electric Company, Lynn, Mass. Mr. La Pierre served on the Membership Committee, 1945–48.

H. A. Glover (A '39), formerly Assistant Sales Manager, has been designated Sales Administration Manager with the S and C Electric Company, Chicago, Ill. Prior to joining the firm in 1946 as Sales Department Supervisor, he had worked for the I-T-E Circuit Breaker Company, Philadelphia, Pa.

W. L. Bird (A '03, F '20), Vice-President, Kaministiquia Power Company, Limited, Fort William, Ontario, Canada, has retired. He has been in the electrical industry 54 years. A Member for Life of the Institute, he served on the Power Stations Committee, 1917–19.

J. K. Hodnette (A '25, F '42), Vice-President and Head of the Transformer Division, Westinghouse Electric Corporation, Sharon, Pa., has become General Manager of Industrial Products with headquarters at Pittsburgh, Pa. Mr. Hodnette served on the Electrical Machinery Committee.

W. R. Coley (A '19, M '25), Vice-President in Charge of Production since 1944 of the Leeds and Northrup Company, Philadelphia, Pa., has retired. He has been with the firm since 1906, when he was employed as an instrument maker in the galvanometer section of the laboratory.

L. E. Record (A '31), for six years supervisor of the Tube Development Laboratory, has been named Supervisor of the Development and Testing Laboratories for the Tube Division, General Electric Company, Schenectady, N. Y.

Edward Allen (A '40, M '47) is the new Midwestern Editor of *Electrical World*. His headquarters are in Chicago, Ill. Formerly, he had been General Service Engineer for the Electric Power Board of Chattanooga, Tenn.

R. R. Jackson (A '45) is in charge of the Edmonton office of F. D. Bolton, Limited, in Edmonton, Alberta, Canada. Formerly, Mr. Jackson was in the employ of the Canadian General Electric Company, Winnipeg, Manitoba.

W. H. Stueve (M '43), Executive Assistant, Oklahoma Gas and Electric Company, Oklahoma City, has been initiated into the Oklahoma University Chapter of Tau Beta Pi for his outstanding achievements in the engineering field.

S. W. Booth (M '45), formerly Associate Chief, has been made Chief of the Engineering Department of the Naval Ordnance Laboratory at White Oak, Md. Mr. Booth joined the laboratory in 1941.

L. R. Crane (A '41), formerly Switchgear Specialist, has been made Manager of Switchgear Sales, A. B. Chance Company, Centralia, Mo.

H. L. Scott (A '49), owner of the Scott Electric Company, Corpus Christi, Tex., has been appointed Chairman of the Business Promotion Committee of the National Electrical Contractors Association.

W. F. Rauber (M '45) is now Manager of Sales for the Switchgear Division, Apparatus Department, General Electric Company, Philadelphia, Pa.

J. T. Ward (A '44) has been appointed vice-president in charge of engineering and operations at the Boston (Mass.) Edison Company Joining the company in 1941, as head of the radio department, he became a vice-president of the Boston utility one year later. Previously, Ward had been affiliated with the Massachusetts Institute of Technology, Cambridge, Mass., and was director of the research laboratory for the M. W. Kellog Company, New York, N. Y.

G. J. Taylor (M '44) of Day-Brite Lighting Inc., New York, N. Y., has been named eastern sales manager of that company. He will be in charge of a territory covered by the New England states, New York State, Pennsylvania, New Jersey, and Washington, D. C. Mr. Taylor joined Day-Brite in 1947. Previously, he had worked for the Cooper-Hewitt Company and General Electric Company.

S. A. Smith (A '24, M '31) has been elected vice-president in charge of research and development at the General Cable Corporation, New York, N. Y. At the same time, **A. D. Pettee** (A '20 F '45) was made vice-president in charge of product engineering. Mr. Pettee now is serving on the Insulated Conductors Committee.

G. M. Woods (M '43), has been appointed manager of the transportation section, industry engineering department, Westinghouse Electric Corporation, East Pittsburgh, Pa. He has been doing transportation engineering work since 1911 when he joined the company.

Neil Mets (A '39) is now transmission engineer in the operations department of the Florida Power and Light Company, Miami. In the same department, **O. T. Ayers** (M '47) has been appointed distribution engineer and **R. A. Goodburn** (A '37) system engineer.

R. E. Worstell (M '46) has been appointed manager of quantity consumer sales, lamp department, General Electric Company, Cleveland, Ohio. Formerly, he was supervisory engineer, Atlantic sales district, in General Electric's New York, N. Y., offices. He has been with the company since 1925.

H. A. Howard (A '45), formerly manager, Brantford Township Hydro-Electric Commission, Brantford, Ontario, Canada, is now superintendent of the Thorold Public Utilities Commission.

E. C. Easter (A '46) is now sales manager, Alabama Power Company, Birmingham. Identified with the utility since 1924, he became chief agricultural engineer three years later, and manager of the rural and towns division in 1933.

A. R. Nelson (A '22, M '29), formerly assistant general superintendent, electrical distribution, Public Service Electric and Gas Company, Newark, N. J., has been named general superintendent. He has been with the company since 1920.

R. A. Merrill (A '47) head of the University of Chattanooga (Tenn.) Engineering Department has been elected president of the newly organized Tennessee Society of Professional Engineers.

J. H. Goss (A' 35, M '43), until recently assistant manager of engineering, control division, General Electric Company, Schenectady, N. Y., has been promoted to manager of engineering. He has been with General Electric since 1931, when he joined the company as a student engineer.

W. G. Albright (A '43), until recently an instructor, has been promoted to an assistant professorship in the electrical engineering department at the University of Illinois, Urbana.

K. W. Johansson (A '11, M '28), formerly connected with the Aluminum Company of America and the Westinghouse Corporation, is now local manager of the Arvada Electric Company, Arvada, Colo. Johannson is a Member for Life of the Institute.

OBITUARY • • • •

George Hart Morse (F '22), consulting engineer, Arlington, Va., died June 1, 1949. A native of St. Paul, Minn., born May 23, 1871, he graduated from the University of Minnesota in 1893 and received an advance degree in electrical engineering from the same university in 1911. Beginning his career in 1893 as a special apprentice with the General Electric Company, Schenectady, N. Y., he subsequently was associated with the Wagner Electrical Manufacturing Company, St. Louis, Mo., and the Benton Harbor Electric Light Railway and Power Company, St. Joseph, Mo. In 1899, he became an instructor in electrical engineering at the University of Nebraska, Lincoln. Three years later, he was designated Professor in and head of the electrical engineering department. After 13 years at the university, he joined the Mutual Electric and Machine Company, Detroit, Mich., as consulting engineer. From 1918 to 1921, he was power specialist and appraisal engineer with the United States Shipping Board Emergency Fleet Corporation. During the interval, 1922–31, he was employed by the Commonwealth of Pennsylvania, for which he did work on the Giant Power Survey, Public Service Commission, and Department of Welfare. Subsequently, he was chief engineer with the New York Power Authority, and, in 1933, he was Chief of the Distribution Cost Survey, conducted by the Federal Power Commission in fulfillment of a Senate resolution. This was the last post he held prior to his retirement from government service. He was the author of articles in the Giant Power Survey published by the Commonwealth of Pennsylvania, and the patentee of electric switches, calculating machines, and television receiving apparatus. He was the codiscoverer of the Morse-Cushman Effect, namely, rectification of an alternating current by means of one arc drawn between three carbons in a magnetic field.

Preston Strong Millar (A '03, M '13), President and Director, Electrical Testing Laboratories, Inc., New York, N. Y., died June 17, 1949. He had been associated with the laboratories and its predecessor for 52 years. Born in Andover, N. J., on March 9, 1880, he joined the Lamp Testing Bureau of the Association of Edison Illuminating Companies at Harrison, N. J., in 1897. Two years later, he became Assistant Manager of the company. In 1900, the Lamp Testing Bureau became the Electrical Testing Laboratories, of which firm, Mr. Millar was designated General Manager in 1914. He was named President in 1929. From 1919 to 1942, he was Secretary of the Association of Edison Illuminating Companies. Co-inventor of the Sharp-Millar photometer, he was the author of numerous technical articles, and contributed to the section on illumination in the Standard Handbook for Electrical Engineers. Mr. Millar was one of the founders of the Illuminating Engineering Society and was its president in 1913. In 1945, he received the society's Gold Medal for his services to that organization and for his contributions to the science of lighting. Other groups in which Mr. Millar was active were: the United States National Committee of the International Commission on Illumination (President, 1936–48); the American Council of Commercial Laboratories (President, 1937–39); and the New York Electrical Society, Inc. (President, 1943–44). He was a fellow of the American Physical Society, the American Association for the Advancement of Science, and the Illuminating Engineering Society, and was a member of the American Optical Society, the American Society for Testing Materials, and the Association of Consulting Chemists and Chemical Engineers. During World War II, Mr. Millar was lighting adviser to the Office of Civilian Protection of Westchester County. He served on the Electrophysics Committee, 1917–18, the Production and Application of Light Committee, 1923–46 (Chairman 1925–28), and the Meetings and Papers Committee, 1925–28. He was a Member for Life.

Norman Leslie Rea (A '02), former Engineering Consultant, Service Engineering Divisions, General Electric Company, Schenectady, N. Y., died May 10, 1949. He was with the company for over 45 years. Born April 11, 1879 in East Beekmantown, N. Y., he received a Bachelor of Science degree in electrical engineering from the Clarckson School of Technology in 1901. Joining General Electric shortly thereafter, he worked in the Testing Department and, later, the Construction Department. Subsequently, he became Supervising Engineer of the latter department. Named Supervising Engineer of the Contract Service Department in 1925, he was designated Superintendent of Electrical Installation in the Service Engineering Divisions eight years afterward. In this post, he directed installations of General Electric apparatus throughout the world. Some American projects on which he worked were the Bonneville Dam, Boulder Dam, and water-power stations of the Tennessee Valley Administration. Abroad, he helped to install generating equipment at the following sites: Santos, Brazil; LaGuaira, Venezuela; and Dnieprostroi, Russia. In addition, he worked on the Rione project in Uruguay and various installations in India. Mr. Rea was appointed Engineering Consultant in 1945, and he retired from General Electric two years later. He was a Member for Life.

Raymond Robert Stoddard (A '38), lawyer and engineer, who had served the Philadelphia (Pa.) Electric Company from 1926 to 1943, died June 16, 1949. For the last five years, he was Industrial Power Engineer for the Brockton Gas Light Company, Concord Electric Company, Exeter and Hampton Electric Company, Pike County Light and Power Company, Rockland Electric Company, Rockland Light and Power Company, Fitchburg Gas and Electric Company, and Springfield Gas Light Company, all in New England and New York. His office was in Boston, Mass. Born December 9, 1900, in Lynn, Mass., Mr. Stoddard had bachelor's and master's degrees in electrical engineering from the Massachusetts Institute of Technology, as well as a Doctor of Laws degree from Temple University Law School. He was a member of the bar, admitted to practice before the United States District Court and Court of Appeals in Washington. Between his Philadelphia and Boston posts, Mr. Stoddard was with the Sperry Gyroscope Company, Garden City, L. I. Prior to working for the Philadelphia Electric Company, he had been a power salesman with Binghamton (N. Y.) Light, Heat and Power Company from 1925 to 1926.

Grover C. Meyer (M '44) Industrial Engineer with the Kansas City (Mo.) Power and Light Company for 32 years died June 2, 1949. A native of Missouri, he was born in Higginsville on September 9, 1892. Graduated in 1917 from Finlay Engineering College, he began his career with the Kansas City Power and Light Company shortly thereafter. During his first four years with the utility, he was in charge of replacing 25-cycle with 60-cycle equipment in flour mills, grain elevators, and feed mills. Later, he did work in the fields of power sales, power cost analysis, and power applications. From time to time, he also did consulting engineerwork for such firms as the Horner Wyatt Engineering Company of Kansas City and the Cereal Engineering Company of Minneapolis, Minn.

Joseph Henry Yarnall (M '19, F '46), formerly Superintendent of Power for the Boston (Mass.) Elevated Railway, now the Metropolitan Transit Authority, died June 5, 1949. He had been with the company since 1906, which he joined after one year with the General Electric Company at Lynn, Mass., as a student apprentice. After three years of service with the transit company he was designated Assistant Engineer in the Electrical Engineering Department. In 1923, he was promoted to Power Engineer in the company's Power Engineering Department. He became Superintendent of Power in 1943. Three years later, he retired. A native of Sunbury, Pa., born January 6, 1884, he received a Bachelor of Science degree from Pennsylvania State College in 1905 and an electrical engineering degree from the same institution in 1914.

Fred Alan Fish (A '00, F '13), Professor of Electrical Engineering, Iowa State College, Ames, died May 20, 1949. He had been teaching at the college since 1905, when he was appointed Associate Professor of Physics and Electrical Engineering. Named Professor of Electrical Engineering and Head of the department in 1907, he relinquished the duties of the latter post in 1930, but remained as Professor. Prior to joining the staff of Iowa State College, Professor Fish served for four years as Assistant Professor of Electrical Engineering at Ohio State University, Columbus. From 1898 to 1900, he had been an instructor at Ohio State, and, in the year that followed, he taught at the University of Wisconsin, Madison. An alumnus of Ohio State University, he was born February 21, 1875 in Milan, Ohio. Professor Fish was identified with the following organizations: the National Electric Light Association (now the Edison Electric Institute), the American Society of Engineering Education; Sigma Xi; Tau Beta Pi; Eta Kappa Nu; and Phi Kappa Phi. He was a Member for Life.

MEMBERSHIP • •

Recommended for Transfer

The board of examiners at its meeting of July 21, 1949 recommended the following members for transfer to the grade of membership indicated. Any objection to these transfers should be filed at once with the secretary of the Institute. A statement of valid reasons for such objections must be furnished and will be treated as confidential.

To Grade of Fellow

Alexander, E. H., mgr., commercial engg. div., General Elec. Co., Schenectady, N. Y.
Clark, L. W., supt. underground lines dept., The Detroit Edison Co., Detroit, Mich.
Dibble, B., consulting engr., 120 E. Palm Ave., Redlands, Calif.
Foulkrod, R., plant extension engr., Michigan Bell Tel. Co., Detroit, Mich.
Hodtum, J. B., central station engr., Allis-Chalmers Mfgr. Co., Pittsburgh, Pa.
Holland, W. A., elec. engg. lecturer, Drexel Inst. of Tech., Phila., Pa.
Landis, G. H., chief engr., Central Hudson Gas & Elec. Corp., Poughkeepsie, N. Y.
Lauder, A. H., asst. mgr. of engg., large motor & generator div., General Elec. Co., Schenectady, N. Y.
Mathewson, H. G., building & equipment engr., Texas area, Southwestern Bell Tel. Co., Dallas, Tex.
Miner, J. D., Jr., mgr., aviation engg. dept., Westinghouse Elec. Corp., Lima, Ohio
Montgomery, T. B., engr. in-chg., control engg., Allis-Chalmers Mfgr. Co., Milwaukee, Wis.
Moulton, J. S., vice pres. & exec. engr., Pacific Gas & Elec. Co., San Francisco, Calif.
Schmitt, G. E., asst. genl. mgr. & chief engr., Lower Colorado River Authority, Austin, Tex.
Sherwin, J. L., chief elec. engr., Arthur G. McKee & Co., Cleveland, Ohio
Stivender, E. H., elec. engr., Allis-Chalmers Mfgr. Co., Milwaukee, Wis.
Wiltse, S. B., prof. of elec. engg.; chairman, coop. & extension education, Rensselaer Poly. Inst., Troy, N. Y.

16 to grade of Fellow

To Grade of Member

Ashley, D. P., elec. engr., Long Island Lighting Co., Mineola, N. Y.
Balch, L. C., sales engr., Kingsport Elec. Co., Inc., Kingsport, Tenn.
Beem, F. A., engr., Illinois Bell Tel. Co., Chicago, Ill.
Bissel, E. E., Jr., electronic engr., Naval Research Laboratory, Washington, D. C.
Brancke, C. A., control engr., General Elec. Co., Erie, Pa.
Bredenberg, A., Jr., design & application engr., General Elec. Co., Erie, Pa.
Bretz, G. W., elec. engr., Air Products, Inc., Emmaus, Pa.
Cattolica, J. L., asst. engr., Pacific Gas & Elec. Co., San Francisco, Calif.
Christie, J., elec. engr., Messrs. A. Reyrolle & Co., Ltd., Hebburn-on-Tyne, England
Clark, E. C., application engr., General Elec. Co., Schenectady, N. Y.
Cobb, L. M., supervisor, elec. system analysis group, The Glenn L. Martin Co., Baltimore, Md.
Cooper, T. R., chief, elec. & mech. sections, Public Service Comm. of W. Va., Charleston, W. Va.
Dukes, W. W., Jr., vice pres., Applied Engg. Co., Inc., Orangeburg, S. C.
Eschmann, W. G., project liaison engr., The Glenn L. Martin Co., Baltimore, Md.
Ewing, P. B., foreign wire relations engr., Indiana Bell Tel. Co., Indianapolis, Ind.
Folks, J. C., service engr., General Elec. Co., Los Angeles, Calif.
Fritsche, W. O., elec. engr., United Illuminating Co., New Haven, Conn.
Fritz, J. R., elec. engr., Gilbert Associates, Inc., Reading, Pa.
Fuegel, E. F., development engr., General Elec. Co., Pittsfield, Mass.
Gaskin, G. C., elec. engr., J. E. Sirrine Co., Greenville, S. C.
Gordon, K. H., asst. elec. engr., The Pennsylvania R. R., Philadelphia, Pa.
Green, J. A., elec. engr., Collins Radio Co., Cedar Rapids, Ia.
Gregory, L. W., design engr., Westinghouse Elec. Corp., Baltimore, Md.
Hastings, H. R., engr., product or design, A. C. Spark Plug Div., GMC., Flint, Mich.
Hoffmann, A. H., electrical design engr., Westinghouse Elec. Corp., East Pittsburgh, Pa.
Hutchison, W. M., transportation application engr., Westinghouse Elec. Corp., East Pittsburgh, Pa.
Jenkins, R. W., senior engr., Consolidated Gas Elec. Light & Pr. Co. of Baltimore, Md.
Jensen, H. A., general foreman, electrical maintenance dept., Nash Kelvinator Corp., Kenosha, Wis.
Johansson, A. V., control requisition engr., General Elec. Co., Erie, Pa.
Kaufman, R. B., developmental engr., General Elec. Co., Pittsfield, Mass.
Linsday, E. A., elec. engr., General Elec. Co., Cleveland, Ohio
Longwell, R. R., engg. & service supervisor, Westinghouse Elec. Corp., Baltimore, Md.
Lyon, W. D., engr., toll plans & estimates, Illinois Bell Tel. Co., Chicago, Ill.
MacLane, G. L., Jr., asst. mgr., engg. labs. & stds., Westinghouse Elec. Corp., East Pittsburgh, Pa.
Margrave, H. E., chief system operator, Kansas Gas & Elec. Co., Wichita, Kans.
Mattison, G. G., asst. supt., elec. maint. & const., Duke Power Co., Charlotte, N. C.
McClure, R. F., system distribution engr., Southwestern Public Service Co., Amarillo, Tex.
McDonnell, J. A., dev. engr., General Elec. Co., West Lynn, Mass.
Misegades, E. L., engg. air conditioning dept., General Elec. Co., Bloomfield, N. J.
Mitch, J. E., engr., The Arnold Engg. Co., Marengo, Ill.
Nelson, J. S., design engr., General Elec. Co., West Lynn, Mass.
Peter, B. L., asst. engr., Pacific Gas & Elec. Co., San Francisco, Calif.
Plunkert, J. F., electronics engr., P-6, Naval Air Test Center, Patuxent River, Md.
Pool, R. P., chief engr. & project mgr., rayon plant, F. V. Llolleo, San Antonio, Chile, S. A.
Quill, J. S., application engr., General Elec. Co., Schenectady, N. Y.
Ringe, G. T., Jr., headquarters avia. repr., Westinghouse Elec. Corp., Los Angeles, Calif.
Rosenquist, R. T., induction motor section engr., Elliott Co., Ridgway, Pa.
Sanderson, H. A., sales engr., Northern States Power Co., Minneapolis, Minn.
Schaeffer, G. H., Jr., elec. engr., Carpenter Steel Co., Reading, Pa.
Schlawin, R. G., designing engr., power trans. engg. div., General Elec. Co., Pittsfield, Mass.
Schlitt, W. J., Jr., engr., Columbus & Southern Ohio Elec. Co., Columbus, Ohio
Sherman, H., chief, systems analysis unit, Watson Labs, AMC, Red Bank, N. J.
Shores, R. B., section engr., development section, General Elec. Co., Phila., Pa.
Smith, J. P., application engr., ind. engg. divs., General Elec. Co., Schenectady, N. Y.
Speight, J. W., testing engr., section head, Hydro-Elec. Power Comm. Labs., Toronto, Ont., Can.
Spencer, J. H., engr., General Elec. Co., Pittsfield, Mass.
Stork, C. L., asst. elec. engr., Eastman Kodak Co., Rochester, N. Y.
Sutherland, R., engr., General Elec. Co., Pittsfield, Mass.
Swinney, J. G. C., Jr., senior engr., International Standard Elec. Corp., New York, N. Y.
Taborsky, S., elec. engr., Glenn L. Martin Co., Baltimore, Md.
Tarpley, H. I., elec. engg. prof., Pennsylvania State College, State College, Pa.
Warshaw, J., chief product engr., International Resistance Co., Phila., Pa.
Whitesell, R. O., consulting engr., Engineering Products, Indianapolis, Ind.
Wilson, M. E., asst. supervisor, elec. system protec. div., Consolidated Gas Elec. Light & Pr. Co. of Baltimore, Md.
Wright, H. E., field application engr., I-T-E Circuit Breaker Co., Boston, Mass.

65 to grade of Member

Applications for Election

Applications for admission or re-election to Institute membership have been received during the month ending August 5, 1949, from the persons listed below. Any member objecting to the election of any of these candidates should so inform the secretary before September 25, 1949, or November 25, 1949, if the applicant resides outside of the United States, Canada, or Mexico. All but a small number of the applications for Associate membership listed below have been received from Student members whose term of such affiliation will not expire until April 30, 1950; action upon such applications will therefore be deferred until that time in practically all cases.

To Grade of Fellow

Brazier, L. G., British Insulated Callender's Cables, Ltd., London, England
1 to grade of Fellow

To Grade of Member

Bewley, J. O., Jr., General Elec. Co., Charleston, W. Va.
Sundararaman, R., The Crompton Eng. Co. (Madras) Ltd., Madras, South India
Conners, M. J., Air Reduction Co., New York, N. Y.
Donahue, R. A., Western Elec. Co., Kearny, N. J.
Lear, W. E., Univ. of Florida, Gainesville, Fla.
Wellan, W. H., North Dakota State School of Science, Wahpeton, N. Dak.
Smith, H. W., Lenkurt Elec. Co., Inc., San Carlos, Calif.
Ackroyd, R. T., Ministry of Supply, Warrington, England
Coutts, C. A., Northern States Power Co., Minneapolis, Minn.
Eschholz, P. A., The Hartford Elec. Light Co., Hartford, Conn.
Hanft, H., 711 New Jersey Ave., Brooklyn, N. Y.
Hawk, R. A., Northern Indiana Public Service Co., Goshen, Ind.
Hitzel, W. C., N. Y. State Elec. & Gas Corp., Lockport, N. Y.
Johannsen, E. A. R., Parsons Aerojet Co., Los Angeles, Calif.
McDonough, J. B., General Elec. Co., San Francisco, Calif.
Morrin, T. H., Stanford Research Inst., Stanford, Calif.
Nicholas, J. E., Pennsylvania State College, State College, Pa.
Roach, O. R., 332 S. Michigan Ave., Chicago, Ill.
Sands, G., Naval Headquarters, Ottawa, Ont., Canada
Scott, A. H., General Elec. Co., Pittsfield, Mass.
Thompson, G. E., Kaiser Co., Inc., Fontana, Calif.
21 to grade of Member

To Grade of Associate

United States, Canada, and Mexico

1. North Eastern

Albaugh, S. W., West Main Rd., Fredonia, N. Y.
Andrew, R. T., Raytheon Mfg. Co., Waltham, Mass.
Angelo, J., General Elec. Co., Schenectady, N. Y.
Appleton, W. B., 71 Hillbert Ave., Brockton, Mass.
Aubrey, A. M., 165 Centre St., Middleboro, Mass.
Austin, E. N., 29 Worcester St., Belmont, Mass.
Bassett, J. D., 35 Haskins St., Providence, R. I.
Berger, M. A., 929 Blue Hill Ave., Dorchester, Mass.
Besser, R. W., 62 Homewood Ave., No. Providence, R. I.
Bunnecke, R. J., 2005 Hoover Rd., Schenectady, N. Y.
Burk, M. K., General Elec. Co., Schenectady, N. Y.
Busharis, J. G., 35 Zumora St., Jamaica Plain, Mass.
Buss, H. W., Rochester Gas & Elec. Corp., Rochester, N. Y.
Caddell, R. C., Jr., 3 Wood St., Fairhaven, Mass.
Campbell, J. M., 289 Angell St., Providence, R. I.
Carson, J. R., 501 Essex St., Bangor, Me.
Carvill, A. L., (re-election) 40 Federal St., W. Lynn, Mass.
Chamberlain, W. E., Jr., 116 Fairview St., Providence, R. I.
Charow, W. J., 1 Belchertown St., Three Rivers, Mass.
Clark, N. F., 3 Norton St., West Lynn, Mass.
Clarke, W. V., 78 Mendon St., Uxbridge, Mass.
Colarusso, J. E., 572 Admiral St., Providence, R. I.
Cooper, S., 136 Fellsway West, Medford, Mass.
Cowen, T. S., N. Y. State Elec. & Gas Corp., Binghamton, N. Y.
Degan, L. J., General Elec. Co., Pittsfield, Mass.
Deuring, W. G., Jr., General Elec. Co., Pittsfield, Mass.
Dickson, A. W., Mass. Inst. of Tech., Cambridge, Mass.
Donegan, E. P., Jr., 862 Washington St., Dorchester, Mass.
Dulong, P. R., 28 Trowbridge Rd., Worcester, Mass.
Durfee, L., Jr., 431-B Elmgrove Ave., Providence, R. I.
Emerson, W. F., R.F.D. #2, Pittsfield, N. H.
Fernandez, R., (Student), Rensselaer Polytechnic Inst., Troy, N. Y.
Ferrante, W. R., 198 Vinton St., Providence, R. I.
Fitzgerald, W. J., Jr., 584 Elm St., New Haven, Conn.
Foss, H. W., 47 Smith St., Marblehead, Mass.
Gates, T. E., Box 541, White River Junction, Vt.
Georgalos, J. E., Boston Edison Co., Boston, Mass.
Gilroy, R. B., 52 Adams Pl., So Weymouth, Mass.
Glasberg, D., 374 Lloyd Ave., Providence, R. I.
Gregory, J. G., 153 Wilbraham Road, Springfield, Mass.
Hale, J. I., Jr., U. S. Naval Shipyard, Portsmouth, N. H.
Haley, J. T., 33 Fourth St., Doven, N. H.
Hatch, D. E., 68 Green St., Bath, Me.
Hayden, H. P., Link Aviation, Inc., Binghamton, N. Y.
Healy, H. G., 285 Pleasant St., Winthrop, Mass.
Henshaw, W. H., Jr., 141 Four Mile Rd., West Hartford, Conn.
Hoag, J. W., Jr., 286 Riverside Ave., Burlington, Vt.
Holmes, R. W., Johnson, Vt.
Hope, B. C., General Elec. Co., Pittsfield, Mass.
Hossfield, G. L., Jr., New England Elec. System, Boston, Mass.
Hurlbert, A. W., 9 Banks St., Cambridge, Mass.
Ignaszewski, C. J., Jr., Erving, Mass.
Jankowski, B., 81 Washington St., Hornell, N. Y.
Johnson, J. K., R.D. #1, Schaghticoke, N. Y.
Kennedy, H. J., 263 Mt. Pleasant Ave., Providence, R. I.
Klein, J. J., 205 Lake View Ave., Cambridge, Mass.
Kogut, J., 108 Pharis St., Syracuse, N. Y.
Komar, M., 131 Boyden St., Woonsocket, R. I.
Krummel, W. M., General Elec. Co., Syracuse, N. Y.
Letourneau, A. L., 59 Prospect St., Ludlow, Mass.
Lilly, J. C., 108 Vine St., Pautucket, R. I.
Lovoi, J. W., Harvard Univ., Cambridge, Mass.
Mahdesyan, M., 123 Japonica St., Pawtucket, R. I.
Mann, W. B., 25 Murray St., Portland, Me.
McFarland, V. E., 81—4th St., Bangor, Me.
McIver, N. E., 202 Milburn St., Rochester, N. Y.
Morey, E. D., Sharon, Conn.
Morisy, P. J., I. B. M. Corp., Endicott, N. Y.
Neubauer, R. L., General Elec. Co., Schenectady, N. Y.
Otto, E. G. (re-election), Hill, N. H.
Paczkowski, H., 13 Carlton St., Salem, Mass.
Paolella, A., 89 Superior St., Providence, R. I.
Parker, R. S., 905 Hall St., Manchester, N. H.
Pechulis, L. T., 153 N. Main St., Uxbridge, Mass.
Pezza, J., 64 A Street, Cranston, R. I.
Prasad, T. L. N. (Student) Harvard Univ., Cambridge, Mass.
Sargent, T. C., Sylvania Elec. Products Inc., Salem, Mass.
Schiffman, M., General Elec. Co., Syracuse, N. Y.
Smith, H. A., Jr., General Railway Signal Co., Rochester, N. Y.
Smith, T. P., (Student), Tufts College, Medford, Mass.
Steves, J. W., 28 Bradbury St., Old Town, Me.
Szepatowski, T. J., 432 River St., Woonsocket, R. I.
Thomas, C. W., 130 Dexterdale Rd., Providence, R. I.
Travers, P., Servomechanisms Lab., Cambridge, Mass.
Wambsganss, B. A., Kingfield, Me.
Weston, W. J., The Connecticut Power Co., New London, Conn.
Weygand, A. D., 3059 Pawtucket Ave., Riverside, R. I.
Willard, C. H., 49 Broad St., Wethersfield, Conn.
Wise, D. O., Jr., 131 Elizabeth St., Hartford, Conn.
Yirrell, F., 11 Whittier St., Winthrop, Mass.

2. Middle Eastern

Aaron, M. R., Franklin Inst. Research Lab., Philadelphia, Pa.
Abbott, W. H., Jr., General Elec. Co., Erie, Pa.
Anders, R. E., 3072 W. 105th St., Up, Cleveland, Ohio
Aydelotte, R. R., 26 Belmont Ave., Wilmington, Del.
Bartholomew, W. J., Jr., Pennsylvania Power & Light Co., Allentown, Pa.
Batcho, J. M., 716 North 4th St., Toronto, Ohio
Beery, W. G., Army Security Agency, Washington, D. C.
Boehler, D. W., Affiliated Gas Equip. Inc., Cleveland, Ohio
Bogner, P. W., Westinghouse Elec. Corp., E. Pittsburgh, Pa.
Bright, D. W., Mine Safety Appliance Co., Pittsburgh, Pa.
Camp, T. B., Jr., Philadelphia Naval Base Shipyard, Philadelphia, Pa.
Carden, G. H., Allis-Chalmers Mfg. Co., Baltimore, Md.
Carr, T. J., R.D. #2, Box 268, Allison Park, Pa.
Catlin, R. C., Westinghouse Elec. Corp., E. Pittsburgh, Pa.
Cavolaski, E. C., Pennsylvania Power & Light Co., Pottsville, Pa.
Chackan, N., Jr., 413 Boyd Street, Turtle Creek, Pa.
Church, M. E., R.F.D. #2, Uniontown, Ohio
Cliffe, W. W., Bailey Meter Co. Ltd., E. Cleveland, Ohio
Comerford, W. T., Westinghouse Elec. Corp., Pittsburgh, Pa.
Council, H. A., Taft Trailer #32, Ada, Ohio
Craft, R. F., R.D. 2, Punxsutawney, Pa.
Dickerson, J. E., 3015 Royston Ave., Baltimore, Md.
Diek, H. A., Jr., Philadelphia Naval Shipyard, Philadelphia, Pa.
Dorn, T. E., Westinghouse Elec. Corp., E. Pittsburgh, Pa.
Dow, E. C., Westinghouse Elec. Corp., E. Pittsburgh, Pa.
Dudley, H. L., U. S. Navy Communications Station, Washington, D. C.
Dye, J. E., Naval Ordnance Lab., White Oak, Md.
Eavenson, C., C & P Telephone Co., Clarksburg, W. Va.
Farley, P. T., 2 Cable St., Athens, Ohio
Feibelman, L., 342 Forest Ave., Cincinnati, Ohio
Ferguson, R. W., U.S. Naval Air Development Station, Johnsville, Pa.
Fitti, N. S., Jr., Naval Air Development Station, Johnsville, Pa.
Flanigan, J. M., (Student), Univ. of Pittsburgh, Pittsburgh, Pa.
Foster, J. J., 5103 Race St., Philadelphia, Pa.
Fowles, J. D., D. C. Oviatt Co., Cleveland, Ohio
Frencho, J. L., Naval Air Development Station, Johnsville, Pa.
Gallagher, J. S., 36 S. 5th St., Easton, Pa.
Gilcrest, D. E., R.D. #1, Hartville, Ohio
Goldich, N. H., 159 Bala Ave., Bala-Cynwyd, Pa.
Good, L. H., RCA Victor Div., Camden, N. J.
Gotthilf, E. G., P. O. Box 175, Hopewell, N. J.
Graham, J. D., R.D. #1, Turtle Creek, Pa.
Gramelspacher, A. C., Ohio Univ., 21 B, Veterans Village, Athens, Ohio
Gregory, W. R., Westinghouse Elec. Corp., E. Pittsburgh, Pa.
Guba, R. A., The Chas. E. Tull Co., Philadelphia. Pa.
Gynn, C. B., Jr., 16919 Lake Ave., Lakewood, Ohio
Haber Atroh, W. C., J & L Steel Corp., Pittsburgh, Pa.
Hanousek, H. W., 3541 Pennington Rd., Shaker Hts. Ohio
Harding, J. H., Westhinghouse Elec. Corp., Pittsburgh, Pa.
Hatch, V. R., American Tel. & Tel. Co., Washington, D. C.
Heins, L. S., United Engineers & Constr. Inc., Philadelphia, Pa.
Hendricks, A. P., United Engrs. & Constructors, Inc., Philadelphia, Pa.
Hessemer, P. B., 606 Evesham Ave., Baltimore, Md.
Hull, E. R., Jeffrey Dewitt Insulator Corp., Kenova, W. Va.
Hines, J. N., Ohio State Univ. Research Foundation, Columbus, Ohio
Hinsey, R. C., Pennsylvania Railroad Co., Saltsburg, Pa.
Hitt, R. E., Rural Electrification Admin., Washington, D. C.
Holder, L. C., Westinghouse Elec. Corp., Pittsburgh, Pa.
Hooper, C. W., Westinghouse Elec. Corp., E. Pittsburgh, Pa.
Hopkins, J. H., 121 Carol St., New Cumberland, Pa.
Jones, H. C., Westinghouse Elec. Corp., E. Pittsburgh, Pa.
Kashmar, C. M., 1826 Constitution Ave., Chester, Pa.
Kephart, D. C., Inst. for Cooper. Research, Baltimore, Md.
Kniskern, P. N., 507 Riverview Rd., Swarthmore, Pa.
Knudsen, R. F., 511 Locust Ave., Westmont, N. J.
Kraus, M. H., 5707 Stuart Ave., Baltimore, Md.
Kravitz, S., 3022 W. Lehigh Ave., Philadelphia, Pa.
Kueter, J. B., (Student), Catholic Univ., Washington, D. C.
Lambert, A. L., (Student), Univ. of Pittsburgh, Pittsburgh, Pa.
Longest, W. G., 2422 W. Lafayette Ave., Baltimore, Md.
Maguire, D. B., 229 East Brown St., E. Stroudsburg, Pa.
Maio, C. R., Pennsylvania Power & Light Co., Lancaster, Pa.
Mathews, D. A., 1017 Red Oak St., Charleston, W. Va.
McCraven, M. R., 3144 Stanton Rd. S.E., Washington, D. C.
McGinnis, C. F., Elliott Co., Ridgway, Pa.
McNally, W. P., USAF Air Materiel Command, Dayton, Ohio
Mele, A. J., 2801 Ellsworth Ave., Erie, Pa.
Meyers, C. L., Pittsburgh Screw & Bolt Corp., Pittsburgh, Pa.
Miller, R., 172 Elizabeth Ave., Trenton, N. J.
Moore, J. G., Pennsylvania Transformer Co., Canonsburg, Pa.
Oerthel, R. H., 1075 Oxford Rd., Cleveland Heights, Ohio
Orr, J. R., R. C. A., Camden, N. J.
Ostroff, A., Technitrol Eng. Co., Philadelphia, Pa.
Patterson, R. W., Republic Steel Corp., Cleveland, Ohio
Petro, A. J., 814 Ridge St., Freeland, Pa.
Phelan, C. S., 402 Dale Drive, Silver Spring, Md.
Phipps, C. H., 125 North St., Bellevue, Ohio
Pietroski, R. W., Naval Air Development Station, Johnsville, Pa.
Plichta, E. J., Clark Controller Co., Cleveland, Ohio
Riddles, A. J., (Student), Catholic Univ., Washington, D. C.
Samans, E. W., Atlantic Refining Co., Philadelphia, Pa.
Schaefer, H. S., Jr., Wheeling Steel Corp., Yorkville, Ohio
Schwartz, C. J., 571 Noah Ave., Akron, Ohio
Senausky, P. V., 35 Montgomery Ave., West Pittston, Pa.
Shackelford, E. D., E. I. duPont de Nemours, Deepwater, N. J.
Silverman, J. B., 4922 N. 5th St., Philadelphia, Pa.
Sloan, C. E., Jr., 5549 Forbes St., Pittsburgh, Pa.
Smith, R. H., Jr., Union Switch & Signal Co., Pittsburgh, Pa.
Snyder, A. J., Jr., 7413 Sprague St., Philadelphia, Pa.
Sonnenfeldt, R. W., RCA Victor Div., Camden, N. J.
Spatt, O., Chase Aircraft Co., West Trenton, N. J.
Sterling, A. G., Jr., John T. Handy Co., Crisfield, Md.
Sticklen, W. E., 115 Oakwood Rd., Charleston, W. Va.
Suffoletta, J. R., 1021 Federal St., Toronto, Ohio
Svec, J. A., 5408 Belle Vista Ave., Baltimore, Md.
Tompkins, H. E., Moore School of Elec. Engg., Univ. of Pennsylvania, Philadelphia, Pa.
Trenbath, H. W., Jr., Air-Maze Corp., Cleveland, Ohio
Tucker, W. M., 4903 Crowson Ave., Baltimore, Md.
Uguccini, O. W., 3999 E. 123rd St., Cleveland, Ohio
Ulmer, R. M., 3041 E. 126th St., Cleveland, Ohio
Van Dine, H. A., Jr., General Elec. Co., Philadelphia, Pa.
Vilushis, T. P., 551 Cleveland St., Hazleton, Pa.
Wells, J. F., 19 Llandillo Road, Havertown, Pa.
Wisniansky, N. F., Pennsylvania Transformer Co., Canonsburg, Pa.
Wynn, F. X., 1019 Fawcett St., McKeesport, Pa.
Zabetakis, S. G., 253 Meyran Ave., Pittsburgh, Pa.

3. New York City

Alt, F., J. C. Morris, Jersey City, N. J.
Antin, J., 1105 Jerome Ave., New York, N. Y.
Beran, L. S., 250 Midland Ave., East Orange, N. J.
Betz, E. S., 418 Nelson Ave., Cliffside Park, N. J.
Brown, R. M., 62 Orchard St., Summit, N. J.
Criddle, L. G., American Machine & Foundry, Brooklyn, N. Y.
Davidson, R. A., 2043 Holland Ave., New York, N. Y.
Dawson, W. J. B., (re-election), Todd Shipyards, Brooklyn, N. Y.
DePalo, V. J., 1239 Webster Ave., New York, N. Y.
Emerson, D. E., 30 Martin Ave., Clifton, N. J.
Engel, N. D., Ward Leonard Elec. Co., Mt. Vernon, N. Y.
Ferguson, J. M., Sperry Gyroscope Co., Great Neck, N. Y.
Fessler, G. E., Bell Tel. Labs., New York, N. Y.
Flaum, I. T., 52 W. 94th St., New York, N. Y.
Forst, J. J., 184 Palisade Ave., Yonkers, N. Y.

Freeman, S. S., 320 E. 197 St., New York, N. Y.
Gale, G. L., Hazeltine Elec. Corp., Little Neck, N. Y.
Gale, M., 489 E. 176th St., Bronx, N. Y.
Gerych, W. E., Bendix Aviation Corp., Teterboro, N. J.
Goldstein, E., Bell Tel. Labs., New York, N. Y.
Gray, E. T., (re-election), Westinghouse Elec. Corp., Newark, N. J.
Hoffman, J. E., c/o Gessner, R.D. #2, Box 53-A, Allendale, N. J.
Hoffmann, C. E., 90-52 181 St., Jamaica, N. Y.
Isaacs, H. C., 1501 Boston Rd., Bronx, N. Y.
Jacobs, A. B., Long Island Lighting Co., Mineola, L. I., N. Y.
Jacobsen, I. S., Industrial Electronics Corp., Newark, N. J.
Jennings, J. T., Signal Corps Engg. Lab., Ft. Monmouth, N. J.
Jensen, A. J., 8535—124th St., Richmond Hill, N. Y.
Kerrigan, J. F., Sperry Gyroscope Co., Great Neck, L. I., N. Y.
Kinn, J. M., Jr., 44 Christopher St., Staten Island, N. Y.
Knapp, P. M., 93 Lenox Ave., Paterson, N. J.
Knight, P., J. A. Maurer, Inc., Long Island City, N. Y.
Lamour, R. W., 1515—1st Ave., New York, N. Y.
Larsson, B. W., Westinghouse Elec. Corp., Hillside, N. J.
Latson, F. W., Jr., 92 Linden Lane, Princeton, N. J.
Lenz, S. V., 124 Milford St., Brooklyn, N. Y.
Lester, E., 816 E. 176th Street, Bronx, N. Y.
Linquiti, A., 165-13—144th Ave., Jamaica, L. I., N. Y.
Lipkin, W., 40 Shore Blvd., Brooklyn, N. Y.
Meenan, J. R., Sperry Gyroscope Co., Great Neck, L. I., N. Y.
Mentcher, I., 410 Madison Ave., Plainfield, N. J.
Minder, P. M., 300 W. 106th St., New York, N. Y.
Moenke, A. R., 32 Van Winkle Ave., Passaic, N. J.
Morris, R. E., J. G. White Engg. Corp., New York, N. Y.
Mustacciuolo, J. P., 105-13 86th St., Ozone Park, N. Y.
Muthukrishnudu, M., 140 Prospect Place, Brooklyn, N. Y.
Nager, J. S., Nager Elec. Co., Inc., Brooklyn, N. Y.
Neff, L. W., Sperry Gyroscope Co., Great Neck, N. Y.
Niewenhous, J. H., Western Union Tel. Co., New York, N. Y.
Parr, H. M., Morningside Ave., South River, N. J.
Peter, R. E., 21 Flint Ave., Hempstead, N. Y.
Petruzzelli, R. T., Signal Corps Engg. Lab., Ft. Monmouth, N.J.
Pfeiffer, T. A., Jr., Signal Corps Engg. Lab., Ft. Monmouth, N. J.
Rosner, I. S., 245 E. 34th St., Brooklyn, N. Y.
Ross, H., 294 Webster Ave., Brooklyn, N. Y.
Ryan, M. W., 137 Elm St., Staten Island, N. Y.
Saller, W., Box 129, Campgaw, N. J.
Schachter, J., Sperry Gyroscope Co., Great Neck, N. Y.
Schreiber, H., Jr., 1031 Norton Road, Union, N. J.
Sengupta, S. K., 321 Marlboro Rd., Brooklyn, N. Y
Shapiro, D., 108 Clarke Pl., Bronx, N. Y.
Simon, W., 820 W. 180 St., New York, N. Y.
Skarzynski, A. T., I. B. M., New York, N. Y.
Smalley, R., Arma Corp., Brooklyn, N. Y.
Spitalny, A., Arma Corp., Brooklyn, N. Y.
Steele, J. H., 414 West 120th St., New York, N. Y.
Stern-Montagny, F., R.F.D., Gardiner, N. Y.
Sulsky, B., 858 East 24th St., Brooklyn, N. Y.
Vialet, F., (re-election), Vialet Engg. Co., New York, N. Y.
Ward, J. H., 50 E. 10th St., New York, N. Y.
Weinberger, J., 321 Eastern Parkway, Brooklyn, N. Y.
Weinstein, I., 392 East 158th St., Bronx, N. Y.
Wolf, F. E., Jr., 1238 College Ave., New York, N. Y.
Xikes, N., Board of Transportation, New York, N. Y.
Zettler, S. G., 1518 St. Peters Ave., Bronx, N. Y.

4. SOUTHERN

Bartlett, A. J., 4003 Delgado, New Orleans, La.
Bateman, L. J., 200 S. Olympia St., New Orleans, La.
Bell, J. R., 1868 Princeton Dr., Louisville, Ky.
Brittain, W. M., (Student), Virginia Military Inst., Lextington, Va.
Brown, C. B. H., Jr., (Student), Univ. of Virginia, Charlottesville, Va.
Brown, G. W. C., Jr., 1519 Calvert St., Norfolk, Va.
Bryan, W. A., Jr., 1104 Elizabeth St., Durham, N. C.
Cates, D. A., (Student), Georgia Inst. of Tech., Atlanta, Ga.
Cosentino, A. A., 667 S.W. 1st St., Miami, Fla.
Courville, E. W., (Student), Louisiana State Univ., Baton Rouge, La.
Fanguy, B. J., Bowman & Bowman Engrs., Greenwood, Miss.
Fields, W. S., 112 E. Todd St., Frankfort, Ky.
Flores, A. H., 2000 6th St. So., Arlington, Va.
Flournoy, T. F., 100 Hudson Lane, Monroe, La.
Fueyo, E., Pan American Airways, Inc., Miami, Fla.
Gee, L. C., 339 So. Telemachus St., New Orleans, La.
Gibbons, P. R., Tampa Elec. Co., Tampa, Fla.
Hart, S. R., Jr., 1120—41st St., Birmingham, Ala.
Hennan, R. J., 2348 Iroquois St., Baton Rouge, La.
Henry, J. H., 103 Houston St., Asheville, N. C.
Hero, G. A., III, General Elec. Co., Gretna, La.
Hicks, R. B., Jr., Montevallo, Ala.
Hines, L. L., Esso Standard Oil Co. of N. J., Baton Rouge, La.
Holladay, G. R., 336 Stonewall St., McKenzie, Tenn.
Holland, H. T., Jr., Holland & Gates, Inc., Jackson, Miss.
Hudson, J. T., 2343 Byrnes Drive, Columbia, S. C.
Huffman, R. E., TVA, Chattanooga, Tenn.
Hufnell, R. N., Virginia Elec. & Power Co., Norfolk, Va.
Hughes, W. E., Jr., 442 Lexington Ave., Charlottesville, Va.
Insalaco, S. R., Florida Power & Light Co., Miami, Fla.
Johnson, W. H., Route #1, Germanton, N. C.
Key, G. T., III, G. T. Key Co., Montgomery, Ala.
Knight, W. C., Alabama Power Co., Birmingham, Ala.
Knight, T. G., Hasting's Instr. Co., Hampton, Va.
Kopelson, S., National Advisory Comm. for Aeronautics, Langley Air Force Base, Va.
Lewis, M. H., Ky. Utilities Co., Pineville, Ky.
Long, A. A., Box 4658, Va. Tech. Station, Blacksburg, Va.
Martin, G. W., Route #1, Johnson City, Tenn.
Mauney, S. D., Jr., 426 S. Main Ave., Newton, N. C.
McDougal, T. A., Memphis Light, Gas & Water Div., Memphis, Tenn.
Ohnesorge, R. W., Florida Power & Light, Ft. Pierce, Fla.
Overstreet, R. J., Reliance Elec. & Engg. Co., Greenville, S. C.
Parker, J. W., Jr., Virginia Elec. & Power Co., Richmond, Va.
Pass, J. H., Box 1686, Auburn, Ala.
Peterson, W. A., Carolina Power & Light Co., Raleigh, N. C.
Scharla-Nielsen, H., Univ. of Florida, Gainesville, Fla.
Schaumberg, W. H., Joseph E. Seagram & Sons, Inc., Louisville, Ky.
Schroeder, G. C., Jr., 826 Independence St., New Orleans, La.
Scott, J. E., Box 6168 University Station, Baton Rouge, La.
Shields, J. G., Ebasco Services, Inc., Jackson, Miss.
Short, F. W., Hunter Elec. Co., Charlotte, N. C.
Smith, J. W., 1811 Grandin Rd., Roanoke, Va.
Smith, L. R., Route 5, Russellville, Ala.
Stevens, N. G., Jr., Alabama Power Co., Montevallo, Ala.
Stock, P. J., Jr., 718 Scott Ave., Pikeville, Ky.
Styers, J. D., Jr., 107 Thomas St., Gastonia, N. C.
Swindoll, R. E., United Gas Corp., Jackson, Miss.
Todd, T. E., (Student), Vanderbilt Univ., Nashville, Tenn.
Vicknair, E. M., 633½ University Walk, Baton Rouge, La.
Warnock, C. F., (Student), Univ. of Florida, Gainesville, Fla.
Whitsett, W. L., 604 South Boylan Ave., Raleigh, N. C.
Williams, J. S., IV, Mississippi State College, State College, Miss.
Wright, M. I., TVA, Chattanooga, Tenn.
Wulff, W. K., Newport News Shipbldg. & Dry Dock Co., Newport News, Va.
Yielding, W. E., 215 W. Irvine Ave., Florence, Ala.
Yucius, G. P., Route #3, Orlando, Fla.

5. GREAT LAKES

Anderson, R. J., 3215—22nd Ave. So., Minneapolis, Minn.
Anderson, R. L., R.R. #2, Sioux Falls, S. D.
Asker, D. D., 1019 11th St. N., Fargo, N. D.
Augustine, J. J., 4313 Oak St., Calumet, Mich.
Balogh, K. F., Town of Lake Engg. Dept., Town o Lake, Wis.
Barron, F. J., 6124 Rohns, Detroit, Mich.
Beck, R. W., R.R. #3, Decatur, Ill.
Bellino, J. A., 3720 W. Ferdinand St., Chicago, Ill.
Benning, G. L., 522 Madison St., Ft. Wayne, Ind.
Berning, L. F., Indiana & Michigan Elec. Co., Ft. Wayne, Ind.
Bickel, R. C., 221 E. 76th St., Chicago, Ill.
Bogdan, R. R., 3946 W. 56th Pl., Chicago, Ill.
Bowman, D. S., Carborundum Co., Chicago, Ill.
Braun, J. J., 1213 S. 88th St., West Allis, Wis.
Bridger, B., Jr., General Elec. Co., Ft. Wayne, Ind.
Brock, N. R., R.R. #1, Salem, Ind.
Brynes, T. R., 7819 S. Hermitage, Chicago, Ill.
Chubb, D. A., Abrams Instrument & Survey, Lansing, Mich.
Clark, W. J., Detroit Edison Co., Detroit, Mich.
Courture, P. J., Christmas Lake, Excelsior, Minn.
Delker, A. G., Jr., Joseph E. Seagram & Sons, Inc., Lawrenceburg, Ind.
Doser, W. G., (Student), Milwaukee School of Engg., Milwaukee, Wis.
Dunlevy, R. D., Box 63, Henryville, Ind.
Dyson, J. D., Barracks 181, Brookings, S. D.
Eckes, L. H., Allis-Chalmers Mfg. Co., Milwaukee, Wis.
Edwards, G. H., Jr., Davis Mfg. Co., Plano, Ill.
Fahley, W. A., 2934 W. 102nd St., Minneapolis, Minn.
Forte, D. J., (Student), Univ. of Minn., Minneapolis, Minn.
Frakes, R. F., Goldfield, Iowa
Frye, J. F., Illinois Power Co., Galesburg, Ill.
Girton, P. E., Kirkhof Elec. Co., Grand Rapids, Mich.
Griffith, H. W., Jr., Sangamo Elec. Co., Springfield, Ill.
Gruenholz, J. F., 618 3rd Ave., Terre Haute, Ind.
Haase, J. A., South Bend Elec., South Bend, Ind.
Hathaway, M. E., 301 W. Main St., N. Manchester, Ind.
Hedgecock, D. M., 7220 Lozier Ave., Van Dyke, Mich.
Hegarty, J. M., 4021 Ridge Ave., Sioux City, Ia.
Hermsen, E. J., Route 2, Carroll, Iowa
Higley, K., Oliver Iron Mining Co., Duluth, Minn.
Hinich, D. E., 2558 So. 4th St., Milwaukee, Wis.
Holaday, D. M., Wisconsin Elec. Power Co., Milwaukee, Wis.
Horner, R. H., F. W. Wakefield, Evanston, Ill.
Houmes, J. W., 1108 N. 12th St., Sheboygan, Wis.
Jones, N. H., 2600 Eastwood Ave., Evanston, Ill.
Kanervo, H. I., Western United Gas & Elec. Co., Aurora, Ill.
Kay, O. F., Electro-Motive Div., General Motors Corp., La Grange, Ill.
Kelley, H. L., The Louis Allis Co., Milwaukee, Wis.
Kelley, W. J., 312 S. State St., Champaign, Ill.
Kipp, R. R., General Motors, La Grange, Ill.
Klingelhoet, S. G., King Midas Flour Mills, Minneapolis, Minn.
Knabach, W. E., Harrisburg, S. D.
Knudsen, K. V., Allis-Chalmers Mfg. Co., West Allis, Wis.
Koerner, N. G., (Student), Milwaukee School of Engg., Milwaukee, Wis.
Kolar, R. F., 1606 Elwood Ave., South Bend, Ind.
Kuba, R. E., Wayne Univ., Detroit, Mich.
Kuchar, R. J., Grand Forks, N. D.
Kuhn, F. W., 255 Lake Shore Dr., Grosse Pointe Farms, Mich.
Kulcinski, S. W., 117 E. Washington, Springfield, Ill.
LaPointe, E. D., Jr., (Student), Univ. of Minnesota, Mineapolis, Minn.
Lovato, P. F., Jr., Allis Chalmers Mfg. Co., Milwaukee, Wis.
Lusk, G. E., N. Highland Ave., Downers Grove, Ill.
Luy, W. J., 5619 N. 36th St., Milwaukee, Wis.
Lyons, T. P., 2604 N. Newcastle Ave., Chicago, Ill.
Marlowe, R. H., 35 Cayuga Ave., Lake Orion, Mich.
Marmorstone, R. J., Chicago Transit Authority, Chicago, Ill.
May, M. M., 1209 Springfield Ct., Willow Run Village, Mich.
McCloskey, L. D., 1305 W. Clark St., Urbana, Ill.
McElroy, W. J., Minneapolis Honeywell Regulator Co Minneapolis, Minn.
McHattie, E. E., R.F.D., Newport, Minn.
Miller, L. J., Purdue Univ., W. Lafayette, Ind.
Morris, R. D., Redmond Co., Inc., Owosso, Mich.
Moses, D., 709—7th St., Bay City, Mich.
Murphy, G. J., (Student), Milwaukee School of Engg., Milwaukee, Wis.
Nordyke, H. W., Jr., Purdue Univ., W. Lafayette, Ind
Olson, R. E., 48A, Badger, Wis.
Palada, J., (Student), Milwaukee School of Engg., Milwaukee, Wis.
Panec, G. A., 4201 N. Marmora Ave., Chicago, Ill.
Pepke, E. B., Minneapolis Honeywell Regulator Co., Detroit, Mich.
Peterson, J. A., 1506 Arthur Ave., Des Moines, Ia.
Plew, H. W., 1411 N. 7th St., Terre Haute, Ind.
Porter, H. M., Westinghouse Elec. Corp., Chicago, Ill
Priban, M. L., Cline Elec. Mfg. Co., Chicago, Ill.
Prucha, M. J., Jr., 702 W. Nevada St., Urbana, Ill.
Randall, J. F., Ford Motor Co., Dearborn, Mich.
Rice, F. S., Jr., 3331 E. 1st St., Duluth, Minn.
Robinette, R. M., A. C. Spark Plug, Flint, Mich.
Salvail, L. H., (Student), Univ. of Minnesota, Minneapolis, Minn.
Schaller, I. D., 825 Pammel Ct., Ames, Iowa
Scheer, D., A. C. Spark Plug Div. GMC, Milwaukee, Wis.
Schmitt, N., c/o A. D. Severyn, Vivian, S. D.
Schmidt, E. F., Northwestern Public Service Co., Huron, S. D.
Seline, H. P., 1405 Center St., Racine, Wis.
Sessum, J. W., (Student), Milwaukee School of Engg Milwaukee, Wis.
Sharp, R. L., Wisconsin Elec. Power Co., Milwaukee Wis.
Sheetz, K. R., 1804 So. 7th Street, Terre Haute, Ind.
Sherman, E. S., Inland Steel Co., E. Chicago, Ind.
Sieron, E. M., (Student), Milwaukee School of Engg., Milwaukee, Wis.
Smith, F. E., Jr., Barber-Colman Co., Chicago, Ill.
Smith, L. L., Jr., 440 Mitchell Ave., Elmhurst, Ill.
Smith, M. E., 407—2nd St., Stambaugh, Mich.
Todd, C. D., Consumers Power Co., Jackson, Mich.
Tolk, W. E., (Student), Univ. of Wisconsin, Athens, Wis
Toulouse, O. J., 701 Pammel Court, Ames, Iowa
Trebing, R. T., Cary, Ill.
Van Effen, W. J., 1319 Stephenson Ave., Escanaba, Mich.
Victora, R. R., Illinois Bell Tel. Co., Chicago, Ill.
Vojta, F. J., 3954—42nd Ave. So., Minneapolis, Minn.
Visk, R. D., 103 University St., W. Lafayette, Ind.
Volbrecht, R. E., 1327 N. 19 St., Milwaukee, Wis.
Wagoner, W. W., FPHA Apt. 304–2, W. State St., W. Lafayette, Ind.
Webb, M. I., (Student), Milwaukee School of Engg., Milwaukee, Wis.
Wershing, R. J., Box 23, Paragon, Ind.
Wheeless, C. A., A.C. Spark Plug Div. GMC, Milwaukee, Wis.
Whitman, R. E., (Student), Milwaukee School of Engg., Milwaukee, Wis.
Willrodt, M. J., 407 Eighth St., Brookings, S. D.
Wolfe, C. L., 1257 Illinois Ave., E. St. Louis, Ill.
Wolfe, R. L., Commonwealth Edison Co., Chicago, Ill.
Wolff, R. E., S & C Elec. Co., Chicago, Ill.
Wollan, S. A., 733 Quincy St. N. E., Minneapolis, Minn.
Wulfmeyer, J. A., Emerson Elec. Mfg. Co., Washington Park, Ill.
Zanella, V. J., 1202 Cloverland Dr., Ironwood, Mich.
Zavitz, E., The Detroit Edison Co., Detroit, Mich.

6. NORTH CENTRAL

Allen, D. E., Rural Route One, Fremont, Nebr.
Brown, D. L., Omaha Public Power Dist., Omaha, Nebr.
Butler, E. R., 2854 Davenport St., Omaha, Nebr.
Cleary, E. F., 1901 S. Garfield, Denver, Colo.
Coffman, W. T., Public Service Co. of Colo., Denver, Colo.
Demuth, H. B., 1027—14th St., Boulder, Colo.
Easterly, V. L., 2295 S. Marion, Denver, Colo.
Fennelly, R. H., 1585 S. Grant, Denver, Colo.
Finlayson, V. A., (re-election), U. S. Bureau of Reclamation, Denver, Colo.
Finnell, C. D., 129½ No. Sherwood St., Ft. Collins, Colo.
Fox, E. W., 1100 N. 7th St., Beatrice, Nebr.
Frederick, D. L., Dumont, Colo.
Huster, G. B., 1157—13th St., Boulder, Colo.
Huster, L. W., 1157—13th St., Boulder, Colo.
Kalandyk, J. L., 1827 Grove, Boulder, Colo.
Kettler, A. T., Consumer's Public Power District, O'Neill, Nebr.

Klein, E. F., 1028 Pleasant St., Boulder, Colo.
Lairmore, W. J., (Student), Univ. of Wyoming, Laramie, Wyo.
Lazure, C. E., 3047 California St., Omaha, Nebr.
Parker, G. A., Nebraska Public Power System, Lincoln, Nebr.
Rider, C. L., Route 4, Longmont, Colo.
Shilling, D. R., Fort Washakie, Wyo.
Sinton, W. G., Box 70, Colorado Springs, Colo.
Traudt, J. H., Mountain States Tel. & Tel. Co., Denver, Colo.
Tyor, M. M., 4545 W. Colfax Ave., Denver, Colo.
Wadi, P. J., U. S. Bureau of Reclamation, Denver, Colo.
Wride, E. K., 124 E. 11th St., Loveland, Colo.

7. SOUTH WEST

Acevedo, T. R., Industrial Electrica, S. A., Mexico, D. F., Mex.
Allred, D. C., Glenwood, N. M.
Anderson, W. R., Alfalfa Elec. Cooper, Inc., Cherokee, Okla.
Baldwin, M. S., Washington Univ., St. Louis, Mo.
Beach, L. C., 33 Green Acres, Rolla, Mo.
Bell, E. M., 622 N. 7th St., Columbia, Mo.
Beltran, A., 514 So. Park St., El Paso, Tex.
Billups, E. E., 1018 Hawaii Ave., Alamogordo, N. M.
Blankenmeister, E. G., 6535 Devonshire, St. Louis, Mo.
Brandes, R. E., Emerson Elec. Mfg. Co., St. Louis, Mo.
Brown, R. E., City Public Serv. Bd., San Antonio, Tex.
Brumbaugh, J. A., Jr., 212 E. Carlton, Pittsburg, Kans.
Carruth, H. B., Southwestern Gas & Elec. Co., De Queen, Ark.
Chapman, C. W., 3115 Norhill, Houston, Tex.
Clooney, L. P., Southwestern Bell Tel. Co., Houston, Tex.
Connell, J. B., 6009 Westminster, St. Louis, Mo.
Costley, L. J., Union Elec. Co. of Mo., St. Louis, Mo.
Crick, P. A., Trumbull Elec. Mfg. Co., Dallas, Tex.
Cunningham, L. C., Celanese Corp. of America, Bishop, Tex.
Cunningham, W. D., Southwestern Public Service Co., Plainview, Tex.
Delahunt, J. E., Union Elec. Co. of Mo., St. Louis, Mo.
Delaney, H. R., Bolivar, Mo.
DeSutter, D. H., Kiamichi Elec. Corp., Wilburton, Okla.
Duke, J. W., Union Elec. Co., St. Louis, Mo.
Faulk, E. E., 412 N. 6th St., Independence, Kans.
Finnell, J. B., 103—3rd Ave., Columbia, Mo.
Foster, M. D., Box 727, Victoria, Tex.
Furfine, A. L., 1392 Blackstone Ave., St. Louis, Mo.
Gentry, B. F., 2511 Locust St., Texarkana, Ark.
Gibson, E. G., Route #2, Mingus, Tex.
Goldman, L. J., 5617a Maple, St. Louis, Mo.
Goth, C. W., Vickers Elec. Div., St. Louis, Mo.
Green, P. M., Magnolia Research Labs., Dallas, Tex.
Hamilton, A. L., Jr., Oklahoma Gas & Elec. Co., Oklahoma City, Okla.
Hartig, R. N., 4948 McPherson, St. Louis, Mo.
Hoopes, J. E., Kansas City Power & Light Co., Kansas City, Mo.
Irish, L. B., Box 196, Joaquin, Tex.
Jacobs, V. J., 328 W. 12th St., Hays, Kans.
Johnson, J. A., 418 N. 5th, Manhattan, Kans.
Kincheloe, W. A., Supervend Corp., Dallas, Tex.
Krummenacher, V. H., Vickers Elec. Div., St. Louis, Mo.
Lambert, A. V., Black & Veatch, Kansas City, Mo.
Lanier, I. D., 624 Vattier, Manhattan, Kans.
Lee, C. J., Texas Tech. College, Lubbock, Tex.
Lindsey, J. W., 5807 Belmont, Dallas, Tex.
Lykins, G. E., 1717 State St., Houston, Tex.
Mallett, C. B., Jr., Southwestern Public Service Co., Amarillo, Tex.
Martin, R. L., (Student), Missouri School of Mines, Rolla, Mo.
Mayes, Jr., W. W., Route 5, Lubbock, Tex.
McGinness, F. E., Texas Elec. Service Co., Wichita Falls, Tex.
McGonigle, G. L., P. O. Box 330, Brownsville, Tex.
McGuire, C. H., Jr., Univ. of Oklahoma, Norman, Okla.
McWeeney, R. J., 5557 Chamberlain Ave., St. Louis, Mo.
Meador, R. G., Box 707, College Station, Tex.
Minshew, C., Jr., Southwestern Public Service Co., Dallas, Tex.
Munoz Pedroza, G., Cia Impulsora de Empresas Electricas, Mexico, D. F.
Naudain, W. A., (re-election), Southern College of Commerce, Inc., Dallas, Tex.
Nelsen, D. A., D.S.R., El Campo, Tex.
Noriega Devesa, L. M., Mexican Light & Power Co., Mexico, D. F.
Ortiz, C. C., Industria Electrica de Mexico, Mexico, D. F.
Radue, P. F., American Tel. & Tel. Co., St. Louis, Mo.
Roomy, J. E., General Electric Co., St. Louis, Mo.
Ruiz Barreto, J. B., Av. Baja California #381 Dept. 2, Mexico, D. F.
Runtz, J. L., 5301R So. Broadway, St. Louis, Mo.
Sanderson, T. P., 2100 Rio Grande, Austin, Tex.
Schaefer, E. L., 315 N. 11th, Albuquerque, N. M.
Schneider, H. L., Monsanto Chemical Co., St. Louis, Mo.
Siegel, I., 5845 DeGiverville, St. Louis, Mo.
Smith, J. R., Box 5148, College Station, Tex.
Smith, W. J., Texas Elec. Service Co., Box 970, Ft. Worth, Tex.
Soto, A., 1112 No. Ange St., El Paso, Tex.
Stadelhofer, J. F., Mines Equipment Co., St. Louis, Mo.
Tucker, G. W., Southwestern Gas & Elec. Co., Longview, Tex.
Vordtriede, O. A., 4444a Forest Park Ave., St. Louis, Mo.
Washam, O. H., Oklahoma Gas & Elec. Co., Oklahoma City, Okla.
Wearden, P. L., Box 373, Wharton, Tex.
Wettig, C. O., 3908 Connecticut St., St. Louis, Mo.
Young, R. W., 149 Mercer St., Ponca City, Okla.
Youngblood, J. P., Southwestern Bell Tel. Co., Little Rock, Ark.
Ziha, E. J., Jr., 4038 Camelia Ave., St. Louis, Mo.

8. PACIFIC

Abjornson, C. A., Richmond Terrace, Richmond, Calif.
Abram, J. C., Geo. F. Hartman Engg. Co., Los Angeles, Calif.
Barkley, J. W., Jr., 1845 Shuey Ave., Walnut Creek, Calif.
Caldwell, J. B., Stanley B. Hare Co., Los Angeles, Calif.
Campett, B. J., 3206 W. 60th St., Los Angeles, Calif.
Chatigny, M. A., Naval Medical Research Unit No. 1, Univ. of Calif., Berkeley, Calif.
Clark, R. E., I. B. M. Inc., San Francisco, Calif.
Clock, D. P., 2110 W. 92nd St., Los Angeles, Calif.
Corbella, W. J., The Pacific Tel. & Tel. Co., San Francisco, Calif.
Craig, L. J., 2531 Regent St., Berkeley, Calif.
Creighton, A. M., Jr., 2702 E. McDowell, Phoenix, Ariz.
Fuller, H. T., Airsupply Co., Los Angeles, Calif.
Gates, E. A., 5415 Mt. View, Riverside, Calif.
Gore, M. R., 136 N. Irving Blvd., Los Angeles, Calif.
Gotuaco, M. R., International House, Berkeley, Calif.
Hakala, P. E., 3915 Quarry Rd., La Mesa, Calif.
Hansen, G. M., 1624 N. Alexandria Ave., Hollywood, Calif.
Harris, E. R., 40 West Louise St., Long Beach, Calif.
Hart, J. G., Jr., California Elec. Power Co., Riverside, Calif.
Henschke, R. A., 3921 Woodruff Ave., Oakland, Calif.
Johnson, C. H., California Elec. Co., Riverside, Calif.
Kappel, T. J., 1822 W. 65th St., Los Angeles, Calif.
Keezer, D. C., 1011 Ninth St., Richmond, Calif.
Kiser, K. W., 31 Pilgrim Ave., San Francisco, Calif.
Larson, J. C., Box 725, McGill, Nev.
Lauerman, E. J., Salt River Valley Water Users' Assn., Phoenix, Ariz.
Leong, P. C., Pacific Fire Rating Bureau, San Francisco, Calif.
Mandler, C. H., 1200—17th Ave., San Francisco, Calif.
McLain, A. R., 1644 Bridge St., Oroville, Calif.
McPhate, J. A., 1402 No. San Gabriel Blvd., San Gabriel, Calif.
McQueen, A. H., Pacific Elec. Mfg. Corp., San Jose, Calif.
Messer, S., 3931 Fall Ave., Richmond, Calif.
Mitra, D. N., Old Dorm, Calif. Inst. of Tech., Pasadena, Calif.
Mulkey, R. H., Bureau of Reclamation, Phoenix, Ariz.
Neal, C. B., 471½ W. San Carlos St., San Jose, Calif.
Peterson, W. D., 1826 Brooklyn Ave., Los Angeles, Calif.
Redlin, C. A., 147 No. Bradbury Dr., San Gabriel, Calif.
Rose, T. A., 2320 Montrose Ave., Montrose, Calif.
Ross, E. C., Allis Chalmers Mfg. Co., Los Angeles, Calif.
Schneider, F. C., 162 N. Sierra Madre Blvd., Pasadena, Calif.
Shepperd, R. R., 1323 Martin Ave., San Jose, Calif.
Stein, C. K., 5982½ Guthrie Ave., Los Angeles, Calif.
Stiles, W. G., Stone & Webster Engg. Corp., Redondo Beach, Calif.
Takemura, H. S., 804 Lincoln Ave., Pasadena, Calif.
Thal-Larsen, H., Bethlehem Steel Co., San Francisco, Calif.
Uhl, H. R., Pacific Elec. Mfg. Corp., San Francisco, Calif.
Walker, E. M., 1908 South Curson Ave., Los Angeles, Calif.
Yates, C. T., Jr., Central Arizona Light & Power Co., Phoenix, Ariz.

9. NORTH WEST

Anderson, M. W., Seattle City Light, Seattle, Wash.
Atkin, H. E., 1854 Redondo Ave., Salt Lake City, Utah
Bartu, A. S., Delta Chi Fraternity, Corvallis, Oreg.
Berdan, F. E., 1402 West 61st St., Seattle, Wash.
Berg, J. C., B. A. Travis, Seattle, Wash.
Bloodworth, J. L., 120—3rd St., Idaho Falls, Idaho
Bruck, R. H., 2822 N. E. 50th Ave., Portland, Oreg.
Bullock, D. L., 11415 NE 87 St., Kirkland, Wash.
Christensen, H. E., 430 12th Ave., Salt Lake City, Utah
Cockeram, D. J., R.F.D. #1, Oakland, Oreg.
Cole, N. E., Jr., Bonneville Power Admin., Portland, Oreg.
Cox, D. R., 1829 N.W. Lovejoy, Portland, Oreg.
Dressler, A. F., 8943-A S.W. 26th Ave., Portland, Oreg.
Ean, W. L., Fairbanks, Morse, & Co., Portland, Oreg.
Erwin, E. V., 4334 11th NE, Seattle, Wash.
Farr, R. F., 540 8th St., Ogden, Utah
Foster, W. G., Box 395 Route 1, Corvallis, Oreg.
George, L. E., 215 South 14th St., Salem, Oreg.
Hawes, D. J., Westinghouse Elec. Corp., Portland, Oreg.
Hooper, M. A., Pullman Appliance, Pullman, Wash.
Horton, L. S., Mountain States Power Co., Albany, Oreg.
Hoskinson, D. L., 1816 NE 12th Ave., Portland, Oreg.
Johnson, L. W., Boeing Airplane Co., Seattle, Wash.
Johnson, R. L., Route 3 Box 202, Corvallis, Oreg.
Kerkof, V. R., 4105 13th Ave. South, Seattle, Wash.
Kessler, V. C., Boeing Airplane Co., Seattle, Wash.
Lemman, R. L., Allis-Chalmers Mfg. Co., Seattle, Wash.
Lynch, J. N., Bonneville Power Admin., Portland, Oreg.
Martin, D. E., 403 N. 12., Corvallis, Oreg.
Matthews, M. M., 659 Jefferson, Corvallis, Oreg.
McKeown, W. G., Montana Power Co., Great Falls, Mont.
Mitchell, E. L., 1410 Boylston, Seattle, Wash.
Moore, D. D., 2104 East 45th, Seattle, Wash.
Mulcock, W. F., 1265 Bryan Ave., Salt Lake City, Utah
Nado, L. J., Corps of Army Engrs., Walla Walla, Wash.
Pace, F. D., Jr., Boeing Airplane Co., Seattle, Wash.
Pyfer, D. H., Montana Power Co., Bozeman, Mont.
Roark, C. S., Box 114, Libby, Mont.
Rogers, T., Fillmore, Utah
Ruede, G. A., (Student), Univ. of Utah, Salt Lake City, Utah
Sawyer, E. W., Newhalem Engg. Office, Rockport, Wash.
Schmidt, R. W., 420 E. 12th St., The Dalles, Oreg.
Sethre, V. C., Bonneville Power Admin., Portland, Oreg.
Smith, R. R., Factory Insurance Assn., Seattle, Wash.
Tobin, T. H., U. S. Bureau of Reclamation, Coulee Dam, Wash.
Wilkins, A. P., Route 1, Box 153C, Vancouver, Wash.

10. CANADA

Bickerdike, C. G., Shawinigan Water & Power Co., Montreal, Que., Canada
Cooper, I. S., 18 McGee St., Ottawa, Ont., Canada
Dawson, G. P., Canadian Research & Development Est., Ottawa, Ont., Canada
Desjardins, R., Hydro-Quebec, Montreal, Que., Canada
Dickinson, J. G., Northern Elec. Co. Ltd., Montreal, Que., Canada
Earle, A. P., Jr., Shawinigan Water & Power Co., Montreal, Que., Canada
Fromm, W. F., 116 Sheridan Ave., Toronto, Ont., Canada
Gaudette, G. M., Sylvania Electric (Canada) Ltd., Drummondville, Que., Canada
Goldberg, D., Canadian Comstock Co. Ltd., F. C. D., St. Catherines, Ont., Canada
Handel, R. D., Hydro Elec. Power Comm., Toronto, Ont., Canada
Harris, A. J., Hydro Elec. Power Comm., Toronto, Ont., Canada
Howchin, E. R., General Elec. Co., Peterborough, Ont., Canada
Hucaluk, F. K., 1361 Langlois Ave., Windsor, Ont., Canada
Jowett, J. R., Commonwealth Elec. Corp. Ltd., Welland, Ont., Canada
Kuzniar, E., International Nickel Co. of Canada, Ltd., Copper Cliff, Ont., Canada
Louttit, C. C., Aluminum Co. of Canada, Ltd., Montreal, Que., Canada
McCarter, R. B., Canadian General Elec. Co., Davenport Works, Toronto, Ont., Canada
Mendel, A. H., Mendel & Brasloff, Montreal, Que., Canada
Merritt, R. D. V., Langley Mfg. Co., Ltd., Vancouver, B. C., Canada
Michael, E. S., c/o Canadian Comstock Co. F.C.D., St. Catherines, Ont., Canada
Milburn, J. V., 2371 Hamiota St., Victoria, B. C., Canada
Miller, V. R., Calgary Power Ltd., Calgary, Alberta, Canada
Milne, E. J., Canadian General Elec. Co., Toronto, Ont., Canada
Milovick, M., Admiralty House, HMCS Stadacona, Halifax, N. S., Canada
Modwel, B. P., Hydro Elec. Power Comm. of Ont., Toronto, Ont., Canada
Moulds, J. H., Canadian Patent Office, Ottawa, Ont., Canada
Paine, F. E., Ford Motor Co., Windsor, Ont., Canada
Palser, G. D., Canadian General Elec. Co., Toronto, Ont., Canada
Penman, M. D., British Columbia Tel. Co., Vancouver, B. C., Canada
Squires, F. M., Ferranti Elec., Mount Dennis, Ont., Canada
Stowe, G. F., Hydro Elec. Power Comm., Ottawa, Ont., Canada
Stuckey, L. R., Groundbirch, B. C., Canada
Taylor, J. D., British Columbia Power Comm., Victoria, B. C., Canada
Trussler, R. S., 9977 Jasper Ave., Edmonton, Alberta, Canada
Turland, D. J., Canadian General Elec. Co., Peterborough, Ont., Canada
Weskett, D. A., Hydro Elec. Power Comm. of Ont., Ont., Canada
Wilde, C. A. T., Amalgamated Elec. Corp., Toronto, Ont., Canada
Yates, R. A., General Elec. Co., Peterborough, Ont. Canada

Elsewhere

Char, J. S., Ibcon Ltd., Bombay, India
Hongskul, M., Directorate of Air Engg., Bangkok, Thailand
Kamal, A. K., Indian Inst. of Science, Bangalore, India
Kar, M. M., College of Engg. & Tech., Calcutta, India
Kayal, P. K., c/o Brook Motors Ltd., Huddersfield, England
Krishnaswami, N., Bombay Port Trust, Fort, Bombay, India
Mew, H. Y., Hawaiian Elec. Co., Honolulu, Hawaii
Nagi, P. S., P. W. D. Elec. Branch, Karnal, E. Punjab, India
Persson, T. V., South Swedish Power Co., Malmo, Sweden
Ramamurthi, G. K., The Crompton Engg. Co. (Madras) Ltd., Madras, South India
Roy-Bardhon, D. N., College of Engg. & Tech., Calcutta India
VanEck, G. W., Royal Dutch Shell Co., Curacao, Netherland, West Indies

Total to grade of Associate

United States, Canada and Mexico, 709
Elsewhere, 12

OF CURRENT INTEREST

1,857 Attend Annual ASTM Meeting; Morrow New Head; 4 Awards Made

At the 22 formal technical sessions and the several informal sessions and round-table discussions held during the 1949 annual meeting of the American Society for Testing Materials in Atlantic City, N. J., early last summer, upward of 185 papers and reports were presented. This was the 52d annual meeting of the society. The total registration, 1,857, was the second highest in the society's history, being exceeded only by the 1944 New York meeting.

One medal and three awards were presented at the meeting. The Charles B. Dudley Medal, awarded to the author or authors of an outstanding paper on research and engineering materials, was presented to six men: W. W. Buechner, R. J. Van de Graaff, H. Feshbach, A. Sperduto, on the staff of Massachusetts Institute of Technology (MIT), Cambridge, Mass.; and E. A. Burrill and L. R. McIntosh, formerly on the staff of MIT, now with High Voltage Engineering Corporation, Cambridge, Mass., for their paper on "An Investigation of Radiography in the Range From 0.5 to 2.5 Million Volts."

The Richard L. Templin Award, presented to the author of a noteworthy paper on new and useful testing procedures and apparatus, was given to W. T. Lankford, Research Associate, Research and Technology Department, Carnegie-Illinois Steel Corporation, Pittsburgh, Pa., for his paper on "Hydraulic Bulge Testing of Sheet Metals."

The Sanford E. Thompson Award, given in recognition of a paper of outstanding merit on concrete and concrete aggregates, was given to R. C. Mielenz and L. P. Witte, Head of Petrographic Laboratory and Durability Unit Materials Laboratories, respectively, Bureau of Reclamation, United States Department of the Interior, Denver, Colo., for their paper on "Tests Used by the Bureau of Reclamation for Identifying Reactive Concrete Aggregates."

The first Sam Tour Award, to encourage improvement of corrosion testing methods, was given to V. M. Darsey and W. R. Cavanagh, President and Research Chemist, respectively, Parker Rust Proof Company, Detroit, Mich., for their paper on "Apparatus and Factors in Salt Fog Testing."

James G. Morrow, Metallurgical Engineer, The Steel Company of Canada, Limited, Hamilton, Ontario, was elected President for 1949–1950, succeeding R. L. Templin, Assistant Director of Research and Chief Engineering of Tests, Aluminum Company of America, New Kensington, Pa., who continues on the Board of Directors as Past-President for three years. Frank E. Richart, Research Professor of Engineering Materials, University of Illinois, Urbana, Ill., is the new Vice-President to serve with the Senior Vice-President, L. J. Markwardt, Assistant Director, United States Forest Products Laboratory, Madison, Wis.

The new members of the Board of Directors are as follows: R. D. Bonney, Assistant Manager of Manufacturing, Congoleum-Nairn, Kearny, N. J.; C. H. Fellows, Head, Chemical Division, Research Department, The Detroit (Mich.) Edison Company; H. F. Gonnerman, Assistant to Vice-President for Research and Development, Portland Cement Association, Chicago, Ill.; N. L. Mochel, Manager, Metallurgical Engineering, Westinghouse Electric Corporation, Philadelphia, Pa.; and M. O. Withey, Dean of Engineering, University of Wisconsin, Madison, Wis.

Building Dedicated to Memory of Carpenter

The Mechanic Arts Building at the State College of Washington, Pullman, will be renamed the H. V. Carpenter Building next October 22 in honor of the former Dean of the College of Engineering, who served in that post from 1917 until his death in 1941. See biography of Mr. Carpenter (A '03, F '18) ***EE Jan '42, p 49***

MIT Offers Postgraduate Course Leading to "Engineer" Degree

A new terminal degree for practicing engineers, to be called the "engineer" degree, has been approved at the Massachusetts Institute of Technology (MIT), Cambridge. The degree of "engineer" will be recommended for students who complete an individually planned, 2-year program of study and research at the institute beyond their undergraduate degrees. Emphasis will be placed upon engineering practice rather than on the research which is characteristic of a program of study leading to a doctor of philosophy degree.

Most master's degree candidates at MIT require slightly more than one year of study to complete their work; candidates for the degree of "engineer," will require at least two years. This added time will result in more thorough training in a wider variety of relevant subjects, and also will enable students to delve more extensively into such fields as industrial economics, business administration, labor relations, and international affairs, thus improving their understanding of the social implications of the work in which they will be engaged.

When the field of specialization is to be indicated, the "engineer" degree will be referred to as follows: civil engineer, mechanical engineer, metallurgical engineer, electrical engineer, chemical engineer, sanitary engineer, marine mechanical engineer, naval architect, naval engineer, aeronautica engineer, building engineer, and meteorologist.

ECPD Reports on Its Study of Engineering-School Curricula

At a recent meeting of the Executive Committee of the Engineers' Council for Professional Development (ECPD), H. T. Heald, president of Illinois Institute of Technology and chairman of the Committee on Engineering Schools of the ECPD, announced that 106 engineering colleges have been visited by inspection committees during the past two years. A total of 481 curricula have been inspected, including 112 new curricular inspections. It is anticipated that by the end of the inspection year, a large share of the previously accredited curricula will have been reviewed and virtually all new curricula for which inspection has been requested will have been examined. The Committee on Engineering Schools is also studying the accreditation of graduate work in engineering.

The Committee on Professional Training, headed by A. C. Monteith, vice-president of Westinghouse Electric Corporation, is embarking upon a 7-point program, focusing attention upon improving the professional training in the postgraduation years. This program includes: a comprehensive survey of postgraduate programs in engineering colleges, industry, the government, and engineering societies; a study of methods of developing community-level programs aimed at improving the professional status and training of the engineer; an analysis of the professional registration of engineers; the encouragement of personal appraisal of the engineer in relation to his job, his community, and the engineering profession; a study of orientation and training programs in industry, with a view toward disseminating information along this line which will aid both large and small companies in developing suitable programs; the revision of selected bibliographies of engineering subjects; and the preparation of a selected reading list for young engineers. The latter two projects are nearing completion.

National Telemetering Forum Completes First Active Year

With the topic, "Requirements and Evaluation of Pickups," the seventh meeting of the National Telemetering Forum was held at the Bendix Aviation Corporation plant, South Bend, Ind., in May 1949. This meeting marked the end of the first year of activity for the forum which first met, for organizational purposes, at Johns Hopkins University, Silver Spring, Md., on May 6, 1948. The meetings are similar, as to manner of presenting papers and discussion, to AIEE Special Technical Conferences.

The National Telemetering Forum was brought about through the efforts of W. J. Mayo-Wells (M '44) an engineer with the telemetering group at the Applied Physics Laboratory of Johns Hopkins University, who realized the great need for a suitable medium to reduce duplication of effort in the interests of national economy and security. Preliminary plans were laid when a small representative group of telemetering men met during the Institute of Radio Engineers Convention in March 1948, and the first formal meeting was held on May 6. From the outset, those invited were purposely chosen to represent designers, manufacturers, users, and planners interested and actively engaged with telemetry. This diversity of representation served to stimulate the development of new ideas and to advance the art from every angle, and it is intended that the forum continue to serve as a source of such information, kept completely up to date, and always available.

By the end of 1948 the membership had grown to nearly a hundred organizations, and thus the following resolutions were adopted at the fifth meeting which took place November 8–9, 1948, at Waltham, Mass.

1. The name agreed upon for the organization is the National Telemetering Forum.
2. The group will not seek affiliation with any existing society or government agency, at least for the time being.
3. The membership shall be unrestricted. Interested organizations are invited to request that their names shall be added to the roll, as attendance shall be by invitation only.
4. Each meeting will last a minimum of two days.
5. Officers to carry out the minimum of essential business were elected as follows: *Chairman*, W. J. Mayo-Wells; *Vice-Chairman*, G. Adams (A '41), Boeing Aircraft Company, Seattle, Wash.; *Secretary*, H. B. Schultheis, Pacific Division, Bendix Aviation Corporation, North Hollywood, Calif.

Representatives of the AIEE met with the Chairman of the forum in New York, N. Y., in April 1949 to formulate plans for mutual education concerning each group's work in the field of telemetering, and it is expected that a joint AIEE/National Telemetering Forum Conference will be held sometime in the near future on subjects in this field of interest to both groups.

Lance Joins NBS Staff. H. W. Lance has been appointed to the staff of the National Bureau of Standards, where he will be concerned with electronic systems for guided missiles in the missile intelligence laboratory of the Bureau's electronics division. Lance has conducted research on electronic instrumentation for measurements in nuclear physics, antennas and transmission lines for use with radar systems, threshold signals for radar receivers, and cancellation devices for radar moving target indication. He was on the staff of the Naval Research Laboratory from 1942 until his appointment to the National Bureau of Standards. From 1938 to 1941 he was a graduate assistant in physics at Cornell University and in 1942 was a member of the faculty of Berea College.

Titus Joins Stanford Research Institute. Carl L. Titus has been appointed assistant director of Stanford Research Institute, Stanford, Calif. Mr. Titus has taken charge of Institute development and industrial service. His responsibilities now include the broadening of contacts with industry and extension of the institute's public service program. Previously, Mr. Titus was on the staff of the Armour Research Foundation, Chicago, Ill., where he was director of the magnetic recorder division, in charge of the foreign and domestic licensing program for the 35 patents the foundation holds on magnetic recording devices. During the war, he was with the Office of Scientific Research and Development, United States Navy. At New London, Conn., he supervised the installation and maintenance of sonar equipment for submarine detection aboard destroyers and escorts. For ten years before his war service, Mr. Titus was assistant manager of the radio division of the Montgomery Ward Company.

Felbeck Receives Plastics Award. The John Wesley Hyatt Award for distinguished achievement in plastics and a $1,000 cash prize were presented to Dr. George T. Felbeck, vice-president, Carbide and Carbon Chemicals Corporation, New York, N. Y., at the annual meeting of the Society of the Plastics Industry. Dr. Felbeck received the award for the engineering developments leading to the large-scale manufacture of polyethylene resins and plastics. Through his work, a plant was created during the war which supplied the United States Navy with the plastic vitally needed for the radar program. The process evolved by Dr. Felbeck for the production of polyethylene consists fundamentally of the pumping of ethylene to a pressure of approximately 30,000 pounds a square inch, and maintaining it at that pressure under controlled temperatures for the time necessary for polymerization.

Future Meetings of Other Societies

American Chemical Society. 116th National Meeting. September 19–23, 1949, Atlantic City, N. J.

American Gas Association. Annual Convention. October 17–20, 1949, Palmer House, Morrison Hotel, and Sherman Hotel, Chicago, Ill.

American Institute of Chemical Engineers. September 6–9, 1949, Mount Royal Hotel, Montreal, Quebec, Canada. November 7–10, 1949, Hotel William Penn, Pittsburgh, Pa.

American Society of Mechanical Engineers. Fall meeting, September 28–30, 1949, Erie, Pa. Annual meeting, November 27–December 2, 1949, Hotel Statler, New York, N. Y.

American Society for Testing Materials. West Coast Meeting. October 10–14, 1949, Fairmount Hotel, San Francisco, Calif.

American Standards Association. Annual Meeting, October 11–14, 1949, Waldorf-Astoria Hotel, New York N. Y.

Engineers' Council for Professional Development. October 28–29, 1949, Edgewater Beach Hotel, Chicago, Ill.

Exposition of Chemical Industries. November 28–December 3, 1949, Grand Central Palace, New York, N. Y.

Illuminating Engineering Society. National Technical Conference. September 19–23, 1949, French Lick, Ind.

Instrument Society of America. Annual meeting and exhibit. September 12–16, 1949, Municipal Auditorium, St. Louis, Mo.

International Scientific Radio Union-Institute of Radio Engineers. October 31–November 2, 1949, National Academy of Sciences and New State Department Building, Washington, D. C.

Iowa Utilities Association Management Conference. October 10–11, 1949, Hotel Fort Des Moines, Des Moines, Iowa.

National Conference on Industrial Hydraulics. Fifth Annual Meeting. October 26–27, 1949, Sheraton Hotel, Chicago, Ill.

National Electrical Contractors Association. Annual Convention, November 7–10, 1949, Rice Hotel, Houston, Tex.

National Electrical Manufacturers Association. November 13–18, 1949, Chalfonte-Haddon Hall, Atlantic City, N. J.

National Electronics Conference. September 26–28 1949, Edgewater Beach Hotel, Chicago, Ill.

National Safety Congress and Exposition. October 24–28, 1949, Stevens, Congress, and Morrison Hotels, Chicago, Ill.

National Television and Electrical Living Show. Second Annual Meeting. September 30–October 9, 1949, Chicago Coliseum, Chicago, Ill.

Pacific Industrial Conferences-Pacific Chemical Exposition. November 1–5, 1949, San Francisco Civic Auditorium, San Francisco, Calif.

Petroleum Electric Power Association. Annual Conference. November 17–18, 1949, Hotel Beaumont, Beaumont, Tex.

Radio Manufacturers Association-Institute of Radio Engineers. 1949 Radio Fall Meeting. November 1–2, Hotel Syracuse, Syracuse, N. Y.

Scottish Industries Exhibition. September 1–17, 1949 Kelvin Hall, Glasgow, Scotland.

Society of Automotive Engineers. Aeronautic Meeting and Aircraft Display. October 5–8, 1949, Biltmore Hotel, Los Angeles, Calif.

Society of Motion Picture Engineers. 66th Semiannual Convention. October 10–14, 1949, Hollywood-Roosevelt Hotel, Hollywood, Calif.

Dr. Felbeck first became associated with the Union Carbide and Carbon Corporation in 1923. Since 1943, he has supervised work in three installations which his company operates for the Atomic Energy Commission at Oak Ridge, Tenn.

Fellowships in Power Systems Engineering. Westinghouse fellowships in power systems engineering at Illinois Institute of Technology, Chicago, have been awarded to Richard P. Burandt, Wood Dale, Ill., and Samuel C. Caldwell, Kansas City, Mo. Made possible through a grant to the institute by the Westinghouse Education Foundation, the fellowship originally provided for free tuition and $1,500 to one applicant for three semesters of study leading to a master's degree in electrical engineering. Because the two most outstanding candidates, Burandt and Caldwell, are both veterans receiving some financial aid under the G. I. Bill, the total award was divided between them. Burandt is an instructor in electrical engineering at Rose Polytechnic Institute, Terre Haute, Ind. Caldwell, now a senior at the Illinois Institute of Technology, will receive his bachelor's degree in June. Both begin the first of three semesters work in September.

RMA Elects Cosgrove President. Raymond C. Cosgrove, executive vice-president of the Avco Manufacturing Corporation, Cincinnai, Ohio, who served the Radio Manufacturers Association (RMA) as president for three consecutive years, 1944 to 1947, again will direct the activities of the association as it begins its 26th year. He was recalled to service by the RMA board of directors for a fourth term at the "Silver Anniversary" convention. President Cosgrove succeeds Max F. Balcom, vice-president of Sylvania Electric Products Inc., Emporium, Pa., who declined to be a candidate for re-election following two years as RMA president. Also, five new RMA directors were elected and Mr. Cosgrove was returned to the board, succeeding John W. Craig, vice-president and general manager of the Crosley Division, Avco Manufacturing Corporation. Nine other directors were re-elected.

Foreign Study Booklet Issued. A handbook of opportunities for study in foreign countries has just been issued by the United Nations Educational, Scientific, and Cultural Organization, listing 10,500 opportunities for international study in 166 subject fields in 27 countries. The largest number of the awards will be in science, particularly engineering, chemistry, public health, and medicine. Entitled "Study Abroad," the handbook is available at $1 per copy from the Columbia University Press, New York 27, N. Y.

Joint IRE-RMA Committee Officers Named. Donald G. Fink (M '45) and John V. L. Hogan (A '11, M '20), Fellows of the Institute of Radio Engineers, have been appointed Chairman and Vice-Chairman respectively of the Joint Technical Advisory Committee by the Boards of Directors of the Institute of Radio Engineers and the Radio Manufacturers' Association. Laurence G. Cumming (M '47), Senior Member of the Institute of Radio Engineers, was reappointed secretary of the Joint Technical Advisory Committee. All three will serve for the term July 1, 1949, through June 30, 1950. Formed jointly by the Institute of Radio Engineers and the Radio Manufacturers' Association in May 1948, the Joint Technical Advisory Committee reviews and evaluates technical and engineering information relating to electronics in order to advise Government bodies and other professional and industrial groups. Currently the committee is assisting the Federal Communications Commission in its deliberations concerning the future use of frequencies from 475 to 890 megacycles for television. It has issued two reports on this subject in connection with recent Commission hearings.

New HKN Chapter in Connecticut. The Beta Omega Chapter of Eta Kappa Nu Association (HKN) was formally installed by Robin Beach (A '15, F '35), formerly Vice-President, and now National President, of HKN, at the University of Connecticut, Storrs, late last spring. Twenty-eight electrical engineering students and 14 others were initiated in a ceremony arranged by A. B. Zerby (A '38), Executive Secretary of HKN. A dinner address was given by Victor Siegfried (A '32, M '38), Vice-President of the AIEE, District 1, who also was initiated as a member of the HKN on this occasion.

Engineering Colleges Group Elects Officers. At a recent meeting of the Association of Engineering Colleges of New York State, the following officers were elected for the 1949–50 term: President—Professor Harold W. Bibber, Chairman, Division of Engineering, Union College, Schenectady, N. Y.; Vice-President—William Allan, Dean, School of Engineering, College of the City of New York (N. Y.); Secretary-Treasurer—Brother Amandus Leo, Dean, School of Engineering, Manhattan College, New York, N. Y. Fifteen New York state colleges belong to the association.

Ordnance Building Dedicated to Diamond. Dedication ceremonies for the Harry Diamond Ordnance Laboratory were held late last spring at the National Bureau of Standards in the presence of representatives of Government and industry. The ceremonies were climaxed by the unveiling of a memorial plaque on the Bureau's ordnance laboratory which names it the "Harry Diamond Ordnance Laboratory." Speakers at the dedication were: the Honorable Charles Sawyer, Secretary of Commerce; Major General E. S. Hughes, Chief of Ordnance, Department of the Army; Rear Admiral A. G. Noble, Chief of the Bureau of Ordnance, Department of the Navy; and Major General R. C. Coupland, Director of Armament, United States Air Force. Mr. Diamond, who died in 1948, pioneered in the development of the Instrument Landing System, a system for the blind landing of aircraft. He also helped to develop radiosonde, a device for collecting weather information from the upper atmosphere, and was one of the inventors of the proximity fuse. For a biography of Mr. Diamond (F '47), see *EE, Aug 48, p 790.*

Electronic Index Has New Publishers. John F. Rider has acquired all properties and copyrights of the Electronic Research Publishing Company, New York, N. Y., publishers of the Electronic Engineering Master Index, as well as the Electronic Engineering Patent Index. The new organization, known as the Electronic Research Publishing Company, Inc., of which Mr. Rider is president, will expand both compilation and publishing activities of these two indexes, so as to include the full gamut of foreign as well as domestic sources of electronic data. It will embrace within its activities, a complete bibliography research service for electronic engineering laboratories, colleges, libraries, and other institutions who desire information on published technical articles. In addition, the organization will publish electronic engineering texts. Publication of bibliography references will be established on a quarterly, semiannual, and annual basis. Headquarters will be maintained at 480 Canal Street, New York 13, N. Y.

IES National Technical Conference. A review of significant lighting achievements of the past year will make up the program of the National Technical Conference of the Illuminating Engineering Society (IES) scheduled for September 19–23, 1949, at French Lick, Ind. The technical sessions of the conference will feature symposia on light sources, color, street lighting, and residence lighting. Also at the conference, C. H. Goddard of Sylvania Electric Products, Inc., will be installed as IES President, and Dr. Ward Harrison, retired Director, Engineering Division, General Electric Company, will be presented the IES Gold Medal and Award Certificate.

H. E. Fritz Honored by Ohio State. Dr. Howard E. Fritz, Vice-President of Research, The B. F. Goodrich Company, has been named 1949 winner of the Lamme Medal of Ohio State University, Columbus. The award is made yearly to a graduate of an Ohio State technical department for "meritorious service in engineering of the technical arts." Dr. Fritz pioneered in the adoption of rubber-lined steel products as chemical engineering tools for the handling of corrosive liquids. He holds four degrees from Ohio State—bachelor of chemical engineering, master of science, professional degree of chemical engineer, and doctor of philosophy.

F. D. Snell Gets British Chemistry Medal. Dr. Foster Dee Snell, chemical consultant of New York, N. Y., recently was presented the gold medal of the Society of Chemical Industry at its meeting in Manchester, England. This is the second time in its 53-year history that this medal has been awarded to an American. It is given biennially by the society's council to a person "who has attained eminence in applied chemistry." Dr. Snell's specialty is surface active phenomena, which embraces the action of soaps, detergents, wetting agents, and similar products. He has been a consulting chemist for nearly 30 years.

LETTERS TO THE EDITOR

INSTITUTE members and subscribers are invited to contribute to these columns expressions of opinion dealing with published articles, technical papers, or other subjects of general professional interest. While endeavoring to publish as many letters as possible, Electrical Engineering reserves the right to publish them in whole or in part or to reject them entirely. Statements in letters are expressly understood to be made by the writers. Publication here in no wise constitutes endorsement or recognition by the AIEE. All letters submitted for publication should be typewritten, double-spaced, not carbon copies. Any illustrations should be submitted in duplicate, one copy an inked drawing without lettering, the other lettered. Captions should be supplied for all illustrations.

Measuring Heavy Direct Currents

To the Editor:

The article, "Measuring Heavy Direct Currents," (*EE, Mar '49, p 242*) says that a static d-c transformer has long been a "sought-after impossibility" until Westinghouse engineers invented the "Transductor."

In fact, however, only the name is new, the device has been published and manufactured in Europe during the past 30 years. The original inventor is E. Besag; he published the d-c transformer in the *Elektrotechnische Zeitschrift*, 1919, page 436. His German patent had been filed six years earlier, August 21, 1913, No. 272,748.

Improvements were later made by

Voigt and Haeftner (German Patent 315,945)
Keinath (German Patent 386,332) filed September 1, 1922
Rottsieper (Allgemeine Elektrizitaetsgesellschaft)
V 3216—1, 1933 *Archiv fuer Technisches Messen*
Someda (L'Elettrotecnica 1935, page 206)
Kraemer (Allg. El. Ges., Elektrot. Z. 1937, page 1309)
Ritz (Siemens and Halske)

There are many publications, summary reports you may find in the *Archiv fuer Technisches Messen* ("*ATM*")

V 3213—1, December 1932
V 3216—1, August 1933
V 3213—2, September 1938
V 3213—3, November 1939

A British d-c transformer with the ratio 40,000/10 amperes (d-c to a-c) has been described in *Electrical World* of August 23, 1941, from *Electrical Review*.

I wonder whether all these publications on the subject and the fact that such transformers were in production abroad were unknown to Westinghouse engineers. The performance of these earlier d-c transformers was fully satisfactory. A 20,000/5 ampere transformer built by Kraemer delivered 30 volt-amperes with an accuracy of +0.5 per cent within 10 and 120 per cent of rated current.

It does not look that the d-c transformer was in one class with the perpetuum mobile.

GEORGE KEINATH (M '37)

(Larchmont, N. Y.)

Exponential Rise

To the Editor:

I have been rather a long time getting round to the May issue of *Electrical Engineering*, and so have just seen the letter by Charles Ammerman on "Exponential Rise" (*EE, May '49, p 468*).

I too have not seen the proof of the use of semilog paper for straightening an exponential curve, but on the European side of the Atlantic at least, its use is widespread. As evidence of this I would remark that British Standard Specification 173, clause 22, page 11, relating to traction motors, specifies this method for the extrapolation of armature cooling curves at zero time.

In a more empirical manner, semilog or log-log paper can be used for making acutely curved graphs more nearly straight. I have used this often to ease the job of interpolating values among experimental points, even when there is no particular law to the curve to justify the use of this special paper. As Worthing and Geffner ("Treatment of Experimental Data") point out, the more nearly a curve approaches a straight line, the easier it is to deal with the figures accurately.

FRANK W. ROBERTS (M '45)

("Ashdown," Western Road, Billericay, Essex, England)

4-Terminal Network

To the Editor

I must concede to Mr. Kroneberg that in his letter to the editor (*EE, Feb '49, p 186*) he does solve my "4-Terminal Network" problem (*EE, Nov '48, p 1073*) very neatly using all six transformers actively.

May I return the compliment to Mr. Kroneberg.

J. SLEPIAN (F '27)

(Associate Director, Westinghouse Research Laboratories, East Pittsburgh, Pa.)

Increasing Quartz Crystal "Q"

To the Editor:

The importance of quartz crystal unit for frequency control derives from the very high *Q* (ratio of reactance to resistance) and the low frequency-temperature coefficient of quartz, and the very steep slope of the reactance curve of the crystal blank. The *Q* of quartz is higher than that of any other frequency controlling device used to date.

The *Q* and frequency of a given quartz crystal blank change, however, with time; these changes are results of the so-called aging process. During World War II, crystal units were used in very large quantities in military communications equipment. Considerable difficulty was experienced during the first years of the war because the useful life of a crystal unit was greatly reduced by reason of its "aging out of frequency" or "going dead." A usable reduction in aging was later accomplished during 1944 by etching the surfaces of the crystal blanks. This only mitigated the effect, however, and its more complete elimination was highly desirable.

A method has recently been developed at the Signal Corps Engineering Laboratories, Fort Monmouth, N. J., whereby the *Q*-value of the quartz blank has been materially increased, and the aging has been very greatly reduced. The method consists of annealing the quartz blank by heating it almost to the inversion temperature of quartz, or 500 degrees centigrade, and cooling it down extremely slowly.

This simple treatment yields values of *Q* which are at least double those of untreated quartz blanks, and variations in frequency and *Q* are minute. These improvements in *Q* and aging characteristics appear to be of a permanent character.

A paper describing the results in greater detail is in preparation.

A. C. PRICHARD, M. A. A. DRUESNE,
D. G. McCAAN

(Signal Corps Engineering Laboratories, Fort Monmouth, N. J.)

Illumination Terms

To the Editor:

So Professor Abramowitz objects (*EE, Jun '49, pp 559–60*) to Dr. Goldmark's use of the foot-lambert as a unit of illumination (*EE, Mar '49, pp 237–42*). I thought everyone knew that such lapses are in the best tradition in writings on photometry. The author is merely playing a game with his readers for the amusement of those who understand.

Professor Abramowitz should know this as well as anyone. In fact, he does it himself. He says "The unit of illumination is foot-candles and refers to light flux per square foot falling normal to the surface." He means, I think, light flux per square foot of surface, period. Again, he says, "Thus, while both foot-candles and foot-lamberts have the same dimensions, that is, 'lumens per square foot,' physically they are quite different." He means, I think, that foot-candles have the dimensions of lumens per square foot, while foot-lamberts have the dimensions of lumens per steradian per square foot.

I must concede Professor Abramowitz a distinct edge over Dr. Goldmark in one respect—he plays the game with more finesse.

MILLARD W. BALDWIN, JR.

(Bell Telephone Laboratories, Murray Hill Laboratory, Murray Hill, N. J.)

To the Editor:

I have read Professor Abramowitz's letter carefully in which he states that I have misused the term foot-lambert. Perhaps it was a mistake on my part not to have spelled out the exact method of measuring the illumination surrounding the receiver. A white card was placed next to the receiver, and the light reflected from that card was measured with a Macbeth Illuminometer as 20 foot-lamberts. In view of more important issues which were involved in the article, I did not feel that it was necessary to give such a detailed explanation of this; and I sincerely hope that I have succeeded in putting across my fundamental ideas to most of your readers.

I greatly appreciate the comments addressed to you by Dr. Baldwin, who has come to my rescue in this matter.

PETER C. GOLDMARK (M '45)

(Director, Engineering Research and Development Department, Columbia Broadcasting System, Inc., New York, N. Y.)

NEW BOOKS • • • • •

The following new books are among those recently received at the Engineering Societies Library. Unless otherwise specified, books listed have been presented by the publishers. The Institute assumes no responsibility for statements made in the following summaries, information for which is taken from the prefaces of the books in question.

TRANSFORMATIONS ON LATTICES AND STRUCTURES OF LOGIC. By Stephen A. Kiss. Published by Stephen A. Kiss, 11 East 92d Street, New York, N. Y. 322 pages, diagrams, tables, $10^1/_4$ by 7 inches, cloth. A study of the symmetries of certain abstract structures written as a guide for those interested in the development of 4-class logic and mathematics. Subject matter deals mainly with Boolean algebras, including such topics as structures; sets, groups, and rings; partially ordered systems and lattices; link-preserving transformations; Boolean algebras; direct unions of chains, number systems; and the calculus of classes, of propositions, and of propositional functions. A bibliography and index are included.

ROYAL SOCIETY NEWTON TERCENTENARY CELEBRATIONS, July 15–19, 1946. University Press, Cambridge, England; Macmillan Company, New York, N. Y., 1947. 92 pages, illustrations, $10^1/_4$ by $6^1/_2$ inches, cloth, $3. This book contains the record of the celebration of the 300th anniversary of the birth of Isaac Newton. The lectures and addresses deal either with Newton as a man or with separate aspects of his work. Much of the book is for skilled readers only, but several lectures are intelligible to the layman.

SPHERICAL HARMONICS. By T. M. MacRobert, Second edition revised. Dover Publications, New York. N. Y., 1947. 372 pages, diagrams, $8^3/_4$ by $5^1/_2$ inches cloth, $4.50. An elementary treatise on harmonic functions for students with a knowledge of calculus but unfamiliar with the method of contour integration or the modern theory of functions of a real variable. On this same basis the book treats Fourier series, Bessel functions, the hypergeometric function, and associated Legendre functions. Considerable space has been devoted to applications in mathematical physics and engineering.

TABLES OF THE BESSEL FUNCTIONS OF THE FIRST KIND OF ORDERS 28 THROUGH 39. (Annals of the Computation Laboratory of Harvard University, volume 10.) By the staff of the Computation Laboratory. Harvard University Press, Cambridge, Mass., 1948. 694 pages, tables, $11^3/_4$ by $7^3/_4$ inches, cloth, $10. Eighth of the series begun in 1947 with tables of the orders zero and one, the present volume continues to present the tables computed on the automatic sequence controlled calculator. Bessel functions of orders 40 through 100 are to be published subsequently. The tabulation in the current volume is carried to 10 decimal places.

THEORETISCHE ELEKTROTECHNIK, BAND 2. Grundzüge der Theorie des Wechselstromkreises und des einphasigen Transformators. (Lehr- und Handbücher der Ingenieurwissenschaften 12.) By K. Kuhlmann. Verlag Birkhäuser, Basel, Switzerland, 1947. 175 pages, diagrams, charts, tables, $9^3/_4$ by $6^1/_2$ inches, linen, 26.50 Sw. frs.; unbound, 22.50 Sw. frs. This book treats analytically and graphically the principles of a-c circuits and single-phase a-c transformers. The representation in analytical form is based on the use of the theory of complex numbers and the geometrical location of points. Among the special topics dealt with are the influence of iron and saturation and leakage phenomena.

TRANSFORMERS, PRINCIPLES AND APPLICATIONS. By C. H. Dunlap, W. A. Siefert, and F. E. Austin. American Technical Society, Chicago 37, Ill., 1948. 277 pages, illustrations, diagrams, charts, tables, $8^1/_2$ by $5^1/_2$ inches, cloth, $2.75. Written for the practical man, this book is a thorough treatment of the subject and is organized for instant application to the job. It is divided into three parts: construction; theory, connections and operations; and the design of small transformers. The electrical and magnetic principle necessary for the understanding of the subjects discussed are included.

TRANSFORMERS, THEORY AND CONSTRUCTION. By W. C. Sealey. International Textbook Company, Scranton, Pa., 1948. Paged in sections, illustrations, diagrams, charts, tables, $8^1/_2$ by $5^1/_4$ inches, cloth, $3. Stressing modern practice, this volume considers transformer history, theory, calculations, construction, and application. It presents the fundamental principles so as to provide an introduction and a working knowledge of transformers. Material which is of academic interest only is omitted, but the author has covered a wide variety of special transformers for unusual applications.

Library Services

ENGINEERING Societies Library books may be borrowed by mail by AIEE members for a small handling charge. The library also prepares bibliographies, maintains search and photostat services, and can provide microfilm copies of any item in its collection. Address inquiries to Ralph H. Phelps, Director, Engineering Societies Library, 29 West 39th St., New York 18, N. Y.

TRENDS IN ENGINEERING EDUCATION, THE COLUMBIA EXPERIENCE. By J. K. Finch. Columbia University Press, New York, N. Y., 1948. 140 pages, charts, tables, 8 by $5^1/_2$ inches, cloth, $2. Although presenting the philosophy of education of one particular school, the Columbia school of engineering, this small volume should be of interest to all engineering educators. Two of the most important problems discussed are the broadening of engineering curricula to include basic subjects of general education and the advancement of graduate instruction and research in engineering science. Teaching methods and the problem of faculty appointments have not been considered.

UNDERSTANDING TELEVISION. By O. E. Dunlap, Jr. Greenberg, Publisher, 201 East 57th St., New York, N. Y., 1948. 128 pages, illustrations, diagrams, maps, tables, 8 by $5^1/_4$ inches, cloth, $2.50. Written for the layman, this volume is a simple, direct explanation of what television is and how it works. Following an historical survey is discussion of the television camera, antennas and relay station, coaxial cable, and the receiver. The techniques involved in putting together a television program, both in the studio and in the field, are considered. There is a glossary.

MATHEMATICS AT WORK. By H. L. Horton. Industrial Press, New York 13, N. Y., 1949. No pagination, diagrams, tables, $9^1/_4$ by 6 inches, fabrikoid, $6. A working manual for machine designers, tool engineers, gauge designers, mechanical draftsmen, and technical or trade students. It reviews the fundamentals of arithmetic, algebra, geometry, and trigonometry. There is a comprehensive discussion of problems and their solution and an explanation of special aids in computation.

MECHANICAL VIBRATIONS. By W. T. Thomson. Prentice-Hall, New York, N. Y., 1948. 222 pages, diagrams, charts, tables, $8^1/_2$ by $5^1/_2$ inches, cloth, $5. Based on courses presented at the University of Wisconsin, this book presents the fundamentals of vibration theory and provides a general background for advanced study in the field. The student is assumed to have an elementary knowledge of calculus, dynamics, and strength of materials.

PAMPHLETS • • • • •

The following recently issued pamphlets may be of interest to readers of "Electrical Engineering." All inquiries should be addressed to the issuers.

NEMA Standards. Two standards recently published are "Standards for Mining Belt Conveyors," Publication Number 49-142, and "Standards for Rubber-Insulated Power and Control Cables," Publication Number 49-141. The first covers sectional-type electrically driven conveyors. The latter describes cable construction, test requirements, and the dimensions of components. 49-142 sells for 50 cents, and 49-141 for $3. Four other standards available are: "Black Varnished Condenser Paper," 48-137; "Yellow Varnished Condenser Paper," 48-138; "Yellow Varnished Nylon Fabric," 48-139; "Yellow Varnished Silk Fabric," 48-140. These are priced at 60 cents per copy. Address orders to National Electrical Manufacturers Association, 155 East 44th Street, New York 17, N. Y.

Manual on Photomicrography, PB 92781. The instruments of photomicrography, their theory and techniques, are discussed in this manual prepared by the Carl Zeiss Company of Germany and translated by the Air Force. Available at $17.50 in photostat and $5.50 in microfilm from the Librarian of Congress, Photoduplication Service, Publication Board Project, Washington 25, D. C.

Optical Glass at the National Bureau of Standards. A description of procedures used by the bureau in its expermental glass plant. Available at 15 cents per copy from the Superintendent of Documents, United States Government Printing Office, Washington 25, D. C.

High-Speed and Motion-Picture Photography. A 129-page booklet covering electrical flash photography, a new high-speed stroboscope, motion-picture equipment for very-high-speed photography, and industrial and scientific applications of high-speed photography. May be purchased for $1.50 from the Society of Motion Picture Engineers, 342 Madison Avenue, New York 17, N. Y.

Department of Commerce Releases. "Some Fundamental Aspects of Telemetering," Report PB93938, dealing with inherent problems. 73 pages. Photostatic copy, $10; microfilm copy, $3.50; "Rotating Electrical Machinery, Transformers and Electric Traction," Report PB93859, a summary on electric motors, generators, and transformers from a review of industrial practice in Germany. 258 pages. Photostatic copy, $32.50; microfilm copy, $9. Available from the Library of Congress, Photo-duplication Service, Publication Board Project, Washington 25, D. C.

Carbon Dioxide Protection of Fur-Storage Vaults, Subject 172B. A report including test procedure and equipment, salvage evaluation, observations, and summaries. Available from the Underwriters' Laboratories, Inc., 207 East Ohio Street, Chicago 11, Ill.

National Bureau of Standards Publications. Circular 469, "Optical Glass at the National Bureau of Standards," a description of the NBS plant for the production of optical glass. 15 cents a copy; Circular 470, "Precision Resistors and Their Measurement," on the practical limitations of resistance-measuring bridges. 20 cents a copy; "Simplified Practice Recommendation R233-48, Rotary Files and Burs," based on consumer requirements. 10 cents a copy. All available from the Superintendent of Documents, Government Printing Office, Washington 25, D. C.

Yes-we have a fountain of youth

ONE of those early explorers came to America to find a Fountain of Youth. But he never found it. We, on the other hand, have never looked for a Fountain of Youth—but we have found one.

The way we look at it, a company exists only so long as it serves the needs of its customers. When it falls too far behind, it fails. That is part of the American tradition of Free Enterprise.

Kerite customers have brought their problems to us for 90 years. And we have done our best to solve them. That keeps us young. And it keeps our customers coming back. As long as people do bring us their problems, we have a Fountain of Youth. We think that is as it should be. We will continue solving problems just as long as we can.

One problem that was solved a long time ago was that of developing an insulation that would stand-up-no-matter-what. Mr. A. G. Day solved that one back in the 1860's when he developed Kerite. We can show you samples of Kerite cable more than 50 years old that are still in first-class condition! The Kerite we build today uses the same formula. It is just about the longest-lasting, most economical insulation around. It stays young, too! The Kerite Company, 30 Church Street, New York 7, N. Y.

Kerite Insulation—Your Cable's Best Life Insurance

DAYS KERITE

KERITE CABLE

Pin point accuracy is

for resistors too!

And IRC provides it. Witness leading manufacturers who specify IRC resistors for advanced electronic circuits. In instrumentation and industrial applications, IRC resistors excel in every important characteristic.

IRC
PRECISION
WIRE WOUND
RESISTOR

IN CRITICAL INSTRUMENTATION, IRC Precision Wire Wounds offer a fine balance of accuracy and dependability. Tolerances of 1% are standard, but ½%, ¼% and 1/10% are available. IRC Precisions also afford maximum temperature coefficient of .002% per ° C. at no extra cost. And in addition, their design and construction assure stability—even where recurring surges are encountered. Labels are acetate. May we send you complete technical data? Just check the coupon.

essential

IRC
TYPE MFB

SEALED PRECISION Voltmeter Multipliers find many critical applications such as are encountered in marine service because of absolute dependability under the most severe humidity conditions. Type MF's are compact, rugged, stable, fully moisture proof and easy to install. They consist of individual wire wound precision resistors, mounted, interconnected and encased in glazed ceramic tubes—and these may be either inductive or non-inductive, for use on AC as well as DC. Send coupon for technical data bulletin.



ACCURACY AND ECONOMY in close tolerance applications make IRC Deposited Carbon PRECISTORS ideal for television and similar circuits. They are outstanding in their ability to provide dependable performance in circuits where the characteristics of carbon composition resistors are unsuitable and wire-wound precisions too expensive. Manufactured in two sizes, 200 ohms to 20 megohms in 1%, 2% and 5% tolerance. Coupon brings full details.

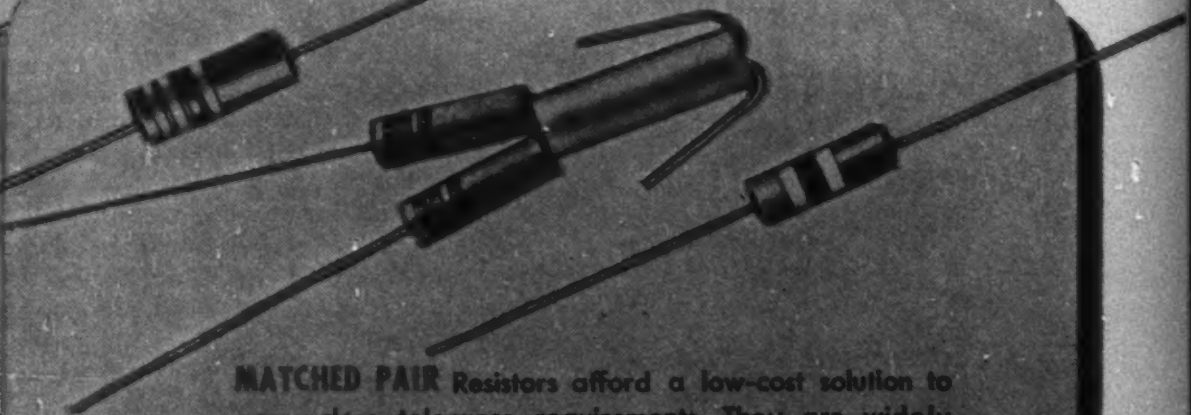

MATCHED PAIR Resistors afford a low-cost solution to many close tolerance requirements. They are widely used as dependable meter multipliers. Two insulated IRC resistors are matched in series or parallel to as close as 1% initial accuracy. Both JAN-R-11 approved Advanced BT resistors and low-range BW insulated wire wounds are available in Matched Pairs. Use the coupon to send for Bulletin B-3.

For fast, local service on standard IRC resistors, simply phone your IRC Distributor. IRC's Industrial Service Plan keeps hm well supplied with the most popular types and ranges—enables him to give you prompt, round-the-corner delivery. We'll be glad to send you his name and address.

IRC

Wherever the Circuit Says -⩘⩗-

Power Resistors • Voltmeter Multipliers • Insulated Composition Resistors • Low Wattage Wire Wounds • Controls • Rheostats • Voltage Dividers • Precisions • Deposited Carbon Precistors • HF and High Voltage Resistors • Insulated Chokes

INTERNATIONAL RESISTANCE COMPANY

401 N. Broad Street, Philadelphia 8, Pa.

In Canada: International Resistance Co., Ltd., Toronto, Licensee

INTERNATIONAL RESISTANCE CO.
411 N. BROAD ST., PHILADELPHIA 8, PA.

Please send me complete information on the items checked below:

☐ Precision Wire Wounds ☐ Deposited Carbon Precistors
☐ Wire Wound Controls ☐ Voltmeter Multipliers
☐ Matched Pair Resistors ☐ Name of Local IRC Distributor

NAME..
TITLE..
COMPANY..
ADDRESS..
....

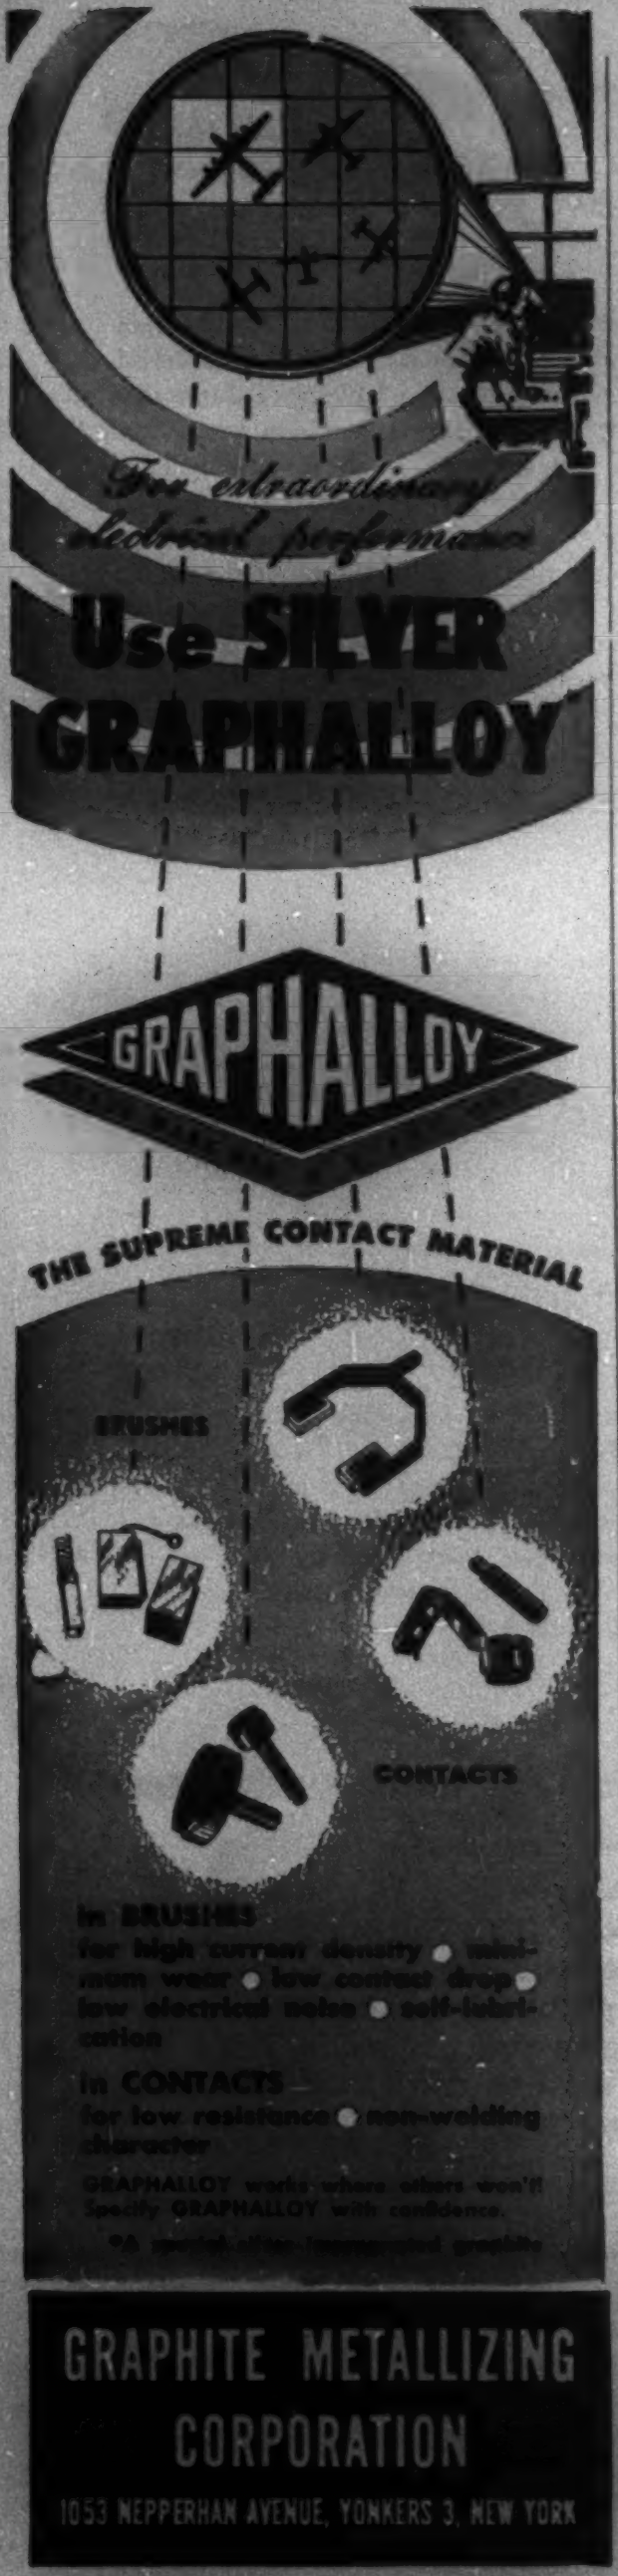

Use SILVER GRAPHALLOY*

GRAPHALLOY

THE SUPREME CONTACT MATERIAL

in BRUSHES
for high current density ● minimum wear ● low contact drop ● low electrical noise ● self-lubrication

in CONTACTS
for low resistance ● non-welding character

GRAPHALLOY works where others won't! Specify GRAPHALLOY with confidence.

*A special silver-impregnated graphite

GRAPHITE METALLIZING CORPORATION
1053 NEPPERHAN AVENUE, YONKERS 3, NEW YORK

INDUSTRIAL NOTES ....

Biddle Company Elections. D. Robert Yarnall was recently elected Chairman of the Board, and J. Robert James, President, of the James G. Biddle Company, Philadelphia, Pa. Additional appointments include those of E. E. Lange, Assistant Sales Manager; S. Q. Lange, Technical Sales Engineer; T. B. Whitson, Director of Engineering; E. B. Curdts, Assistant Director of Engineering, and C. Sommer, Advertising Manager.

S & C Expands Sales Staff. As a result of an expanded sales volume, and the introduction of new products, S and C Electric Company (formerly Schweitzer and Conrad, Inc.,) has appointed R. S. Barbaras to their sales staff in the position of Sales Promotion Manager.

11 Westinghouse Plants Win Safety Award. Industry's highest safety award, the Distinguished Service to Safety Award of the National Safety Council, has been awarded to 13 Westinghouse plants. 42,000 employees of the 13 plants compiled more than 90 million man-hours of work, with less than three lost-time accidents per million. Only 226 such accidents occurred in this group; which is twice as good as the average for the entire electrical industry. Three of the Westinghouse plants—Baltimore, Md., Lima, Ohio, and Sunbury, Pa., are receiving the safety award for the third time.

General Electric Appointments. Glenn B. Warren has been appointed Manager of General Electric's Turbine Division, and H. V. Erben, Vice-President and General Manager of the company's Apparatus Department. Mr. Warren succeeds John W. Belanger, who recently was named Assistant General Manager of the Apparatus Department. Following his appointment, Mr. Warren named Edwin E. Parker to succeed him as Manager of Engineering of the Turbine Divisions.

Marquardt Aircraft Appoints Osborne. William E. Osborne has been designated Chief of the Electronic and Guidance Division of the Marquardt Aircraft Company at Van Nuys, Calif. The division which Mr. Osborne will direct is engaged principally in the research and development of equipment applicable to guided missiles, especially those in the supersonic ranges.

Ohio Brass Appointments. Merrill W. Manz has been designated Vice-President; Roger A. Black General Factory Manager; and H. E. Shoemaker Manager, Foreign Trade Department, of the Ohio Brass Company, Mansfield, Ohio.

Allis-Chalmers Appointments. C. Stuart Haagensen has been appointed Assistant Manager of Allis-Chalmers Labor Relations Department, and Secretary of the firm's negotiating committee, and Herbert J. Rass has been named employment Manager for the concern's West Allis Works. Also, J. F. Fitzsimmons has been appointed Manager of Allis-Chalmers Commercial Research Department, succeeding J. R. Reed, who resigned to establish his own company, and J. D. Greensward has been named General Manager of the Norwood, Ohio works of the company.

Burnham Adams Vice-President of Lear. Burnham Adams, Manager of the California Division of Lear, Inc., since May, 1946, was elected Vice-President of the corporation recently.

Tebben Forms Consulting Firm. John D. Tebben, formerly General Sales Manager for the P. R. Mallory Company, and Vice-President of the S. M. S. Corporation, has formed a new company to do consulting work in engineering sales and industrial relations. The company's headquarters will be at 20869 Mound Road, Detroit, Mich.

Kells Eastern Manager of Martin Publishing. Charles F. Kells, Managing Director of the Electric Industrial Truck Association, has resigned to become Eastern Manager of the B. J. Martin Publishing Company, Chicago, Ill., publishers of *Electrified Industry* and *Today's Business.*

Ebasco Services Adds Rolla Powers to Staff. Rolla E. Powers has been appointed Consulting Electrical Engineer for Ebasco Services, Inc. From 1923 to 1945, Mr. Powers was employed by Westinghouse Electric; in 1943 he was loaned to the Kellex Corporation to act as a department head to design, construct, and place in operation the diffusion plant at Oak Ridge, Tenn., for separation of U235 from U238. Following this, Mr. Powers became Project Engineer for the Stanolind Oil and Gas Company.

NEW PRODUCTS • •

General Electric Developments. Complete, ready-to-install substations designed for use on rural systems, and available in any one of four basic arrangements have been recently developed by the General Electric Company. Designed and manufactured as a unit, the substations contain ratings which range from 300 to 1,500 kva, 22,000 to 69,000 volts (incoming), 12,470Y/7,200 or 13,200Y/7,620 volts (outgoing). Additional information may be secured by requesting publication *GEA-5276* from the Apparatus Department, General Electric Company, Schenectady, N. Y. General Electric has also announced a new slope control for use as an accessory with either synchronous or nonsynchronous resistance welding machines of the single-phase type. Designed to provide

(*Continued on page 26A*)

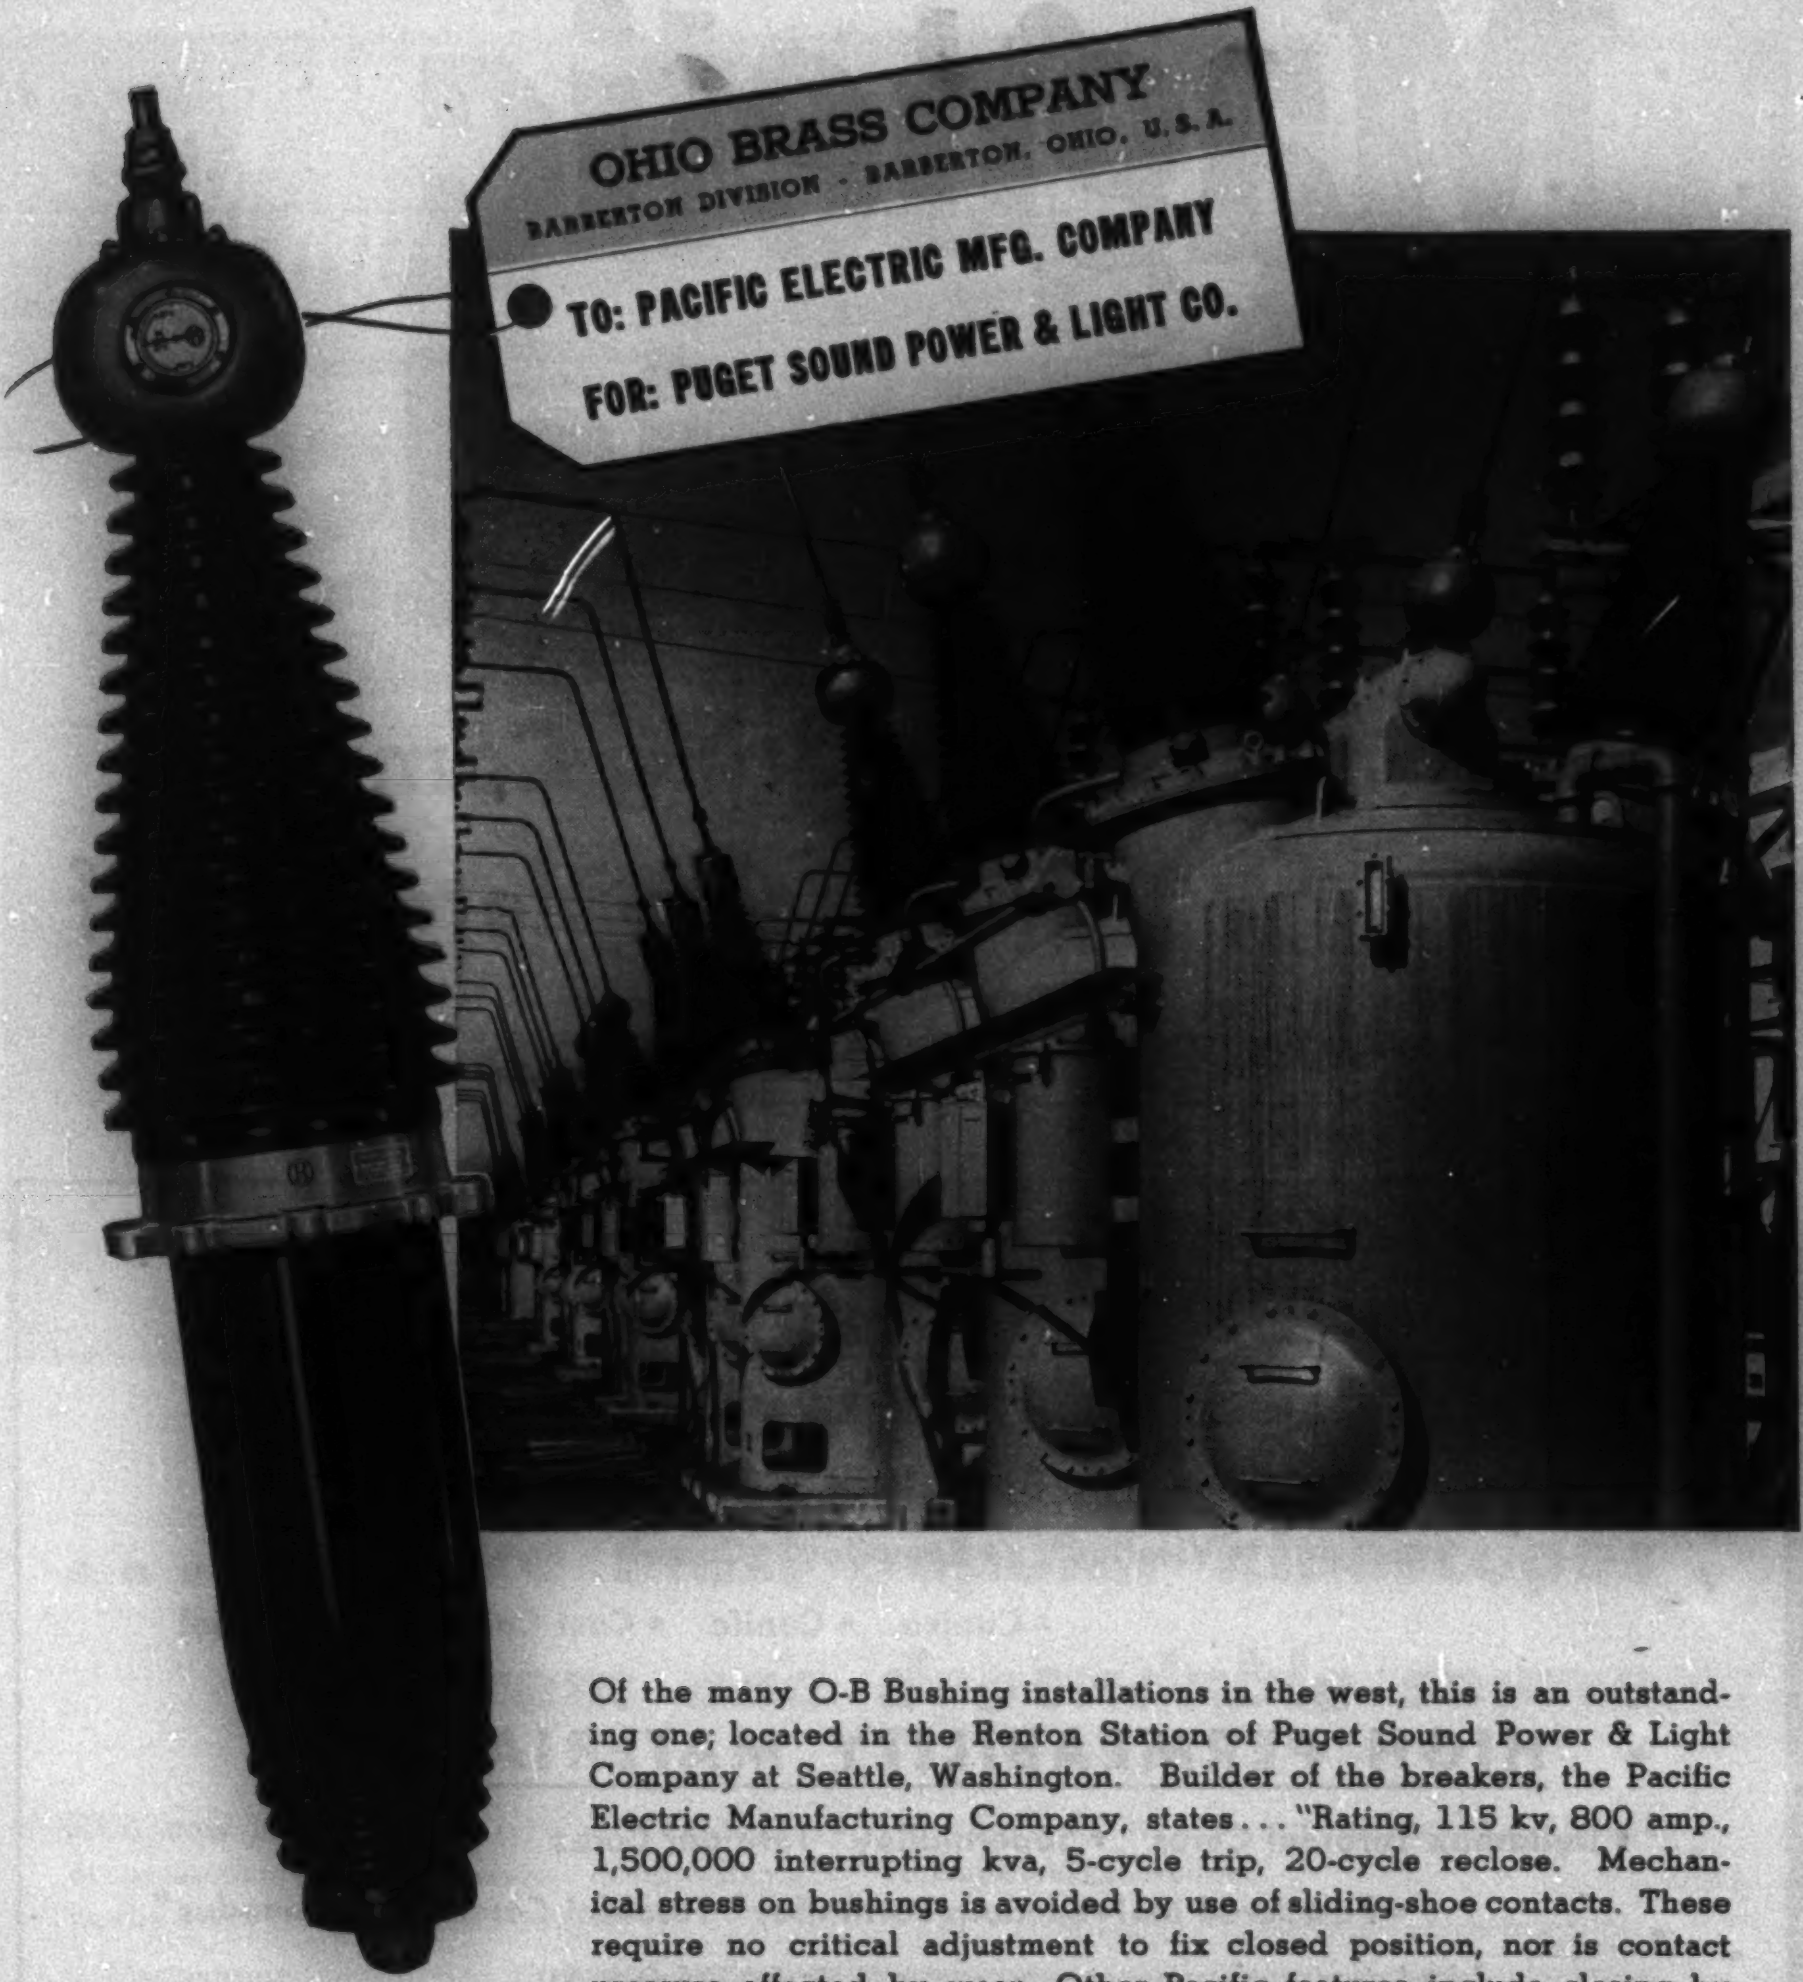
OHIO BRASS COMPANY
BARBERTON DIVISION - BARBERTON, OHIO, U.S.A.
TO: PACIFIC ELECTRIC MFG. COMPANY
FOR: PUGET SOUND POWER & LIGHT CO.

Of the many O-B Bushing installations in the west, this is an outstanding one; located in the Renton Station of Puget Sound Power & Light Company at Seattle, Washington. Builder of the breakers, the Pacific Electric Manufacturing Company, states . . . "Rating, 115 kv, 800 amp., 1,500,000 interrupting kva, 5-cycle trip, 20-cycle reclose. Mechanical stress on bushings is avoided by use of sliding-shoe contacts. These require no critical adjustment to fix closed position, nor is contact pressure affected by wear. Other Pacific features include closing by stored energy of motor-compressed springs, expulsion-chamber arc extinguishment." And . . .

O-B BUSHINGS ONE OF THE FINEST COMPONENTS OF *ANY* CIRCUIT BREAKER . . . . .

Ohio Brass MANSFIELD, OHIO

[illegible]

Magnetic Materials

The Arnold Engineering Company offers to the trade a complete line of Magnetic Materials

PERMANENT MAGNET MATERIALS

- Cast Magnets, Alnico I, II, III, IV, V, VI, XII, X-900
- Sintered Magnets, Alnico II, IV, V, VI, X-900, Remalloy*
- Vicalloy*
- Remalloy* (Comol)
- Cunico
- Cunife
- Cast Cobalt Magnet Steel

HIGH PERMEABILITY MATERIALS

- Deltamax Toroidal Cores
- Supermalloy* Toroidal Cores
- Powdered Molybdenum Permalloy* Toroidal Cores
- Permendur*

**Manufactured under licensing arrangements with WESTERN ELECTRIC COMPANY*

Write for information relating to any of these Magnetic Materials

THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION

147 EAST ONTARIO STREET, CHICAGO 11, ILLINOIS

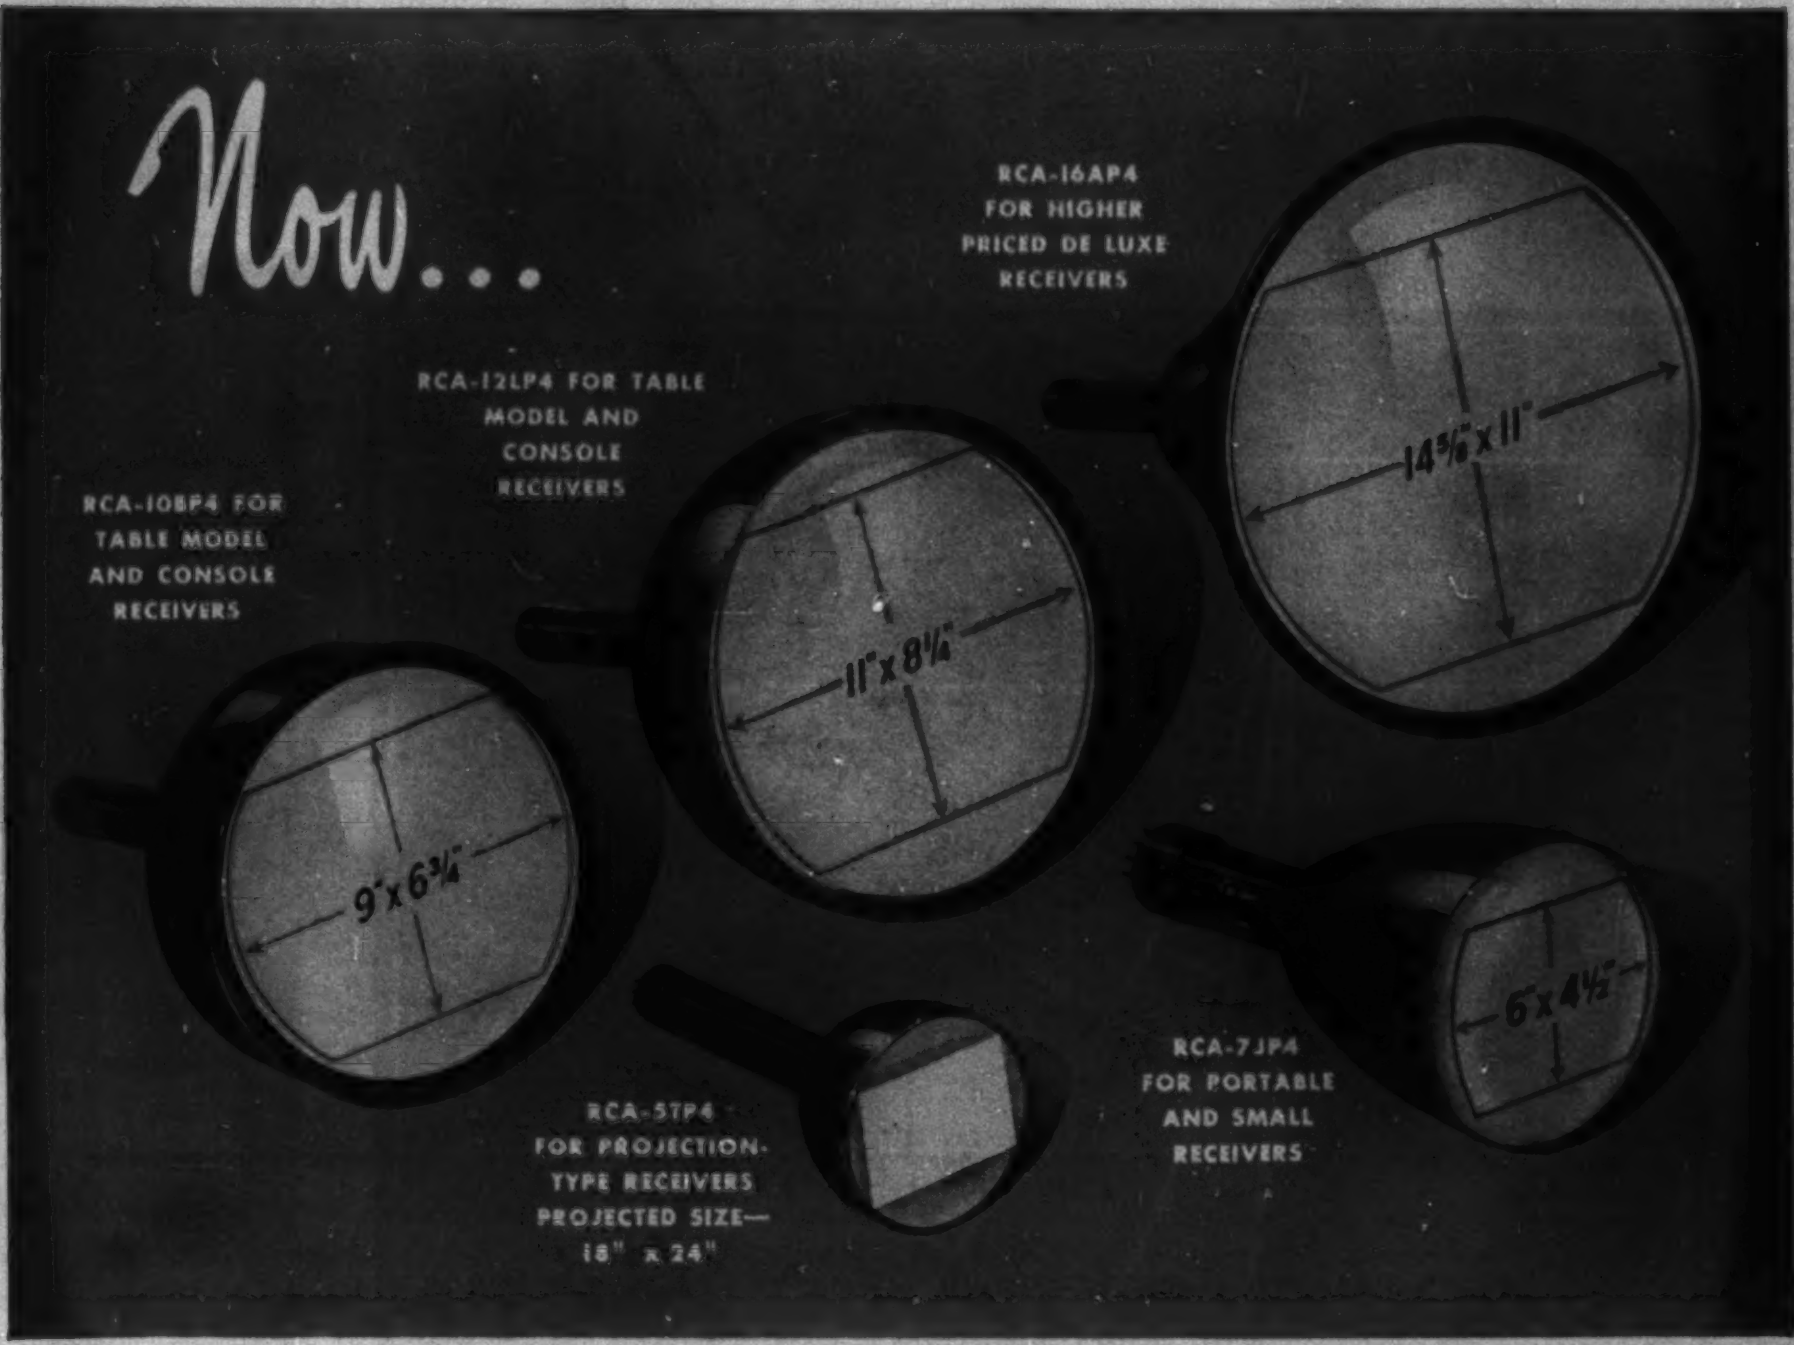
Now...
RCA-16AP4 FOR HIGHER PRICED DE LUXE RECEIVERS
RCA-12LP4 FOR TABLE MODEL AND CONSOLE RECEIVERS
RCA-10BP4 FOR TABLE MODEL AND CONSOLE RECEIVERS
14⅝" x 11"
11" x 8¼"
9" x 6¾"
6" x 4½"
RCA-7JP4 FOR PORTABLE AND SMALL RECEIVERS
RCA-5TP4 FOR PROJECTION-TYPE RECEIVERS PROJECTED SIZE— 18" x 24"

THE FOUNTAINHEAD OF MODERN TUBE DEVELOPMENT IS RCA

. . . the five most popular kinescopes —from one dependable source

RCA now has a popular type of kinescope to accommodate television receiver designs in practically every class and price range.

Concentrated production on these five accepted types results in longer production runs, which in turn, make possible lower cost, more uniform, and better quality tubes for our customers.

All five types are currently being mass-produced at the famed RCA tube plant in Lancaster, Pennsylvania. In addition, a large new plant is under construction at Marion, Indiana, where the production will be centered on the RCA-16-inch metal-cone kinescope.

RCA Application Engineers are ready to cooperate with you in applying these kinescopes and their associated components to your specific designs. For further information write RCA, Commercial Engineering, Section 39IR, Harrison, N. J.

The world's most modern tube plant . . .
RCA, LANCASTER, PA.

RADIO CORPORATION of AMERICA
ELECTRON TUBES **HARRISON, N. J.**

3 Speeds for Bette

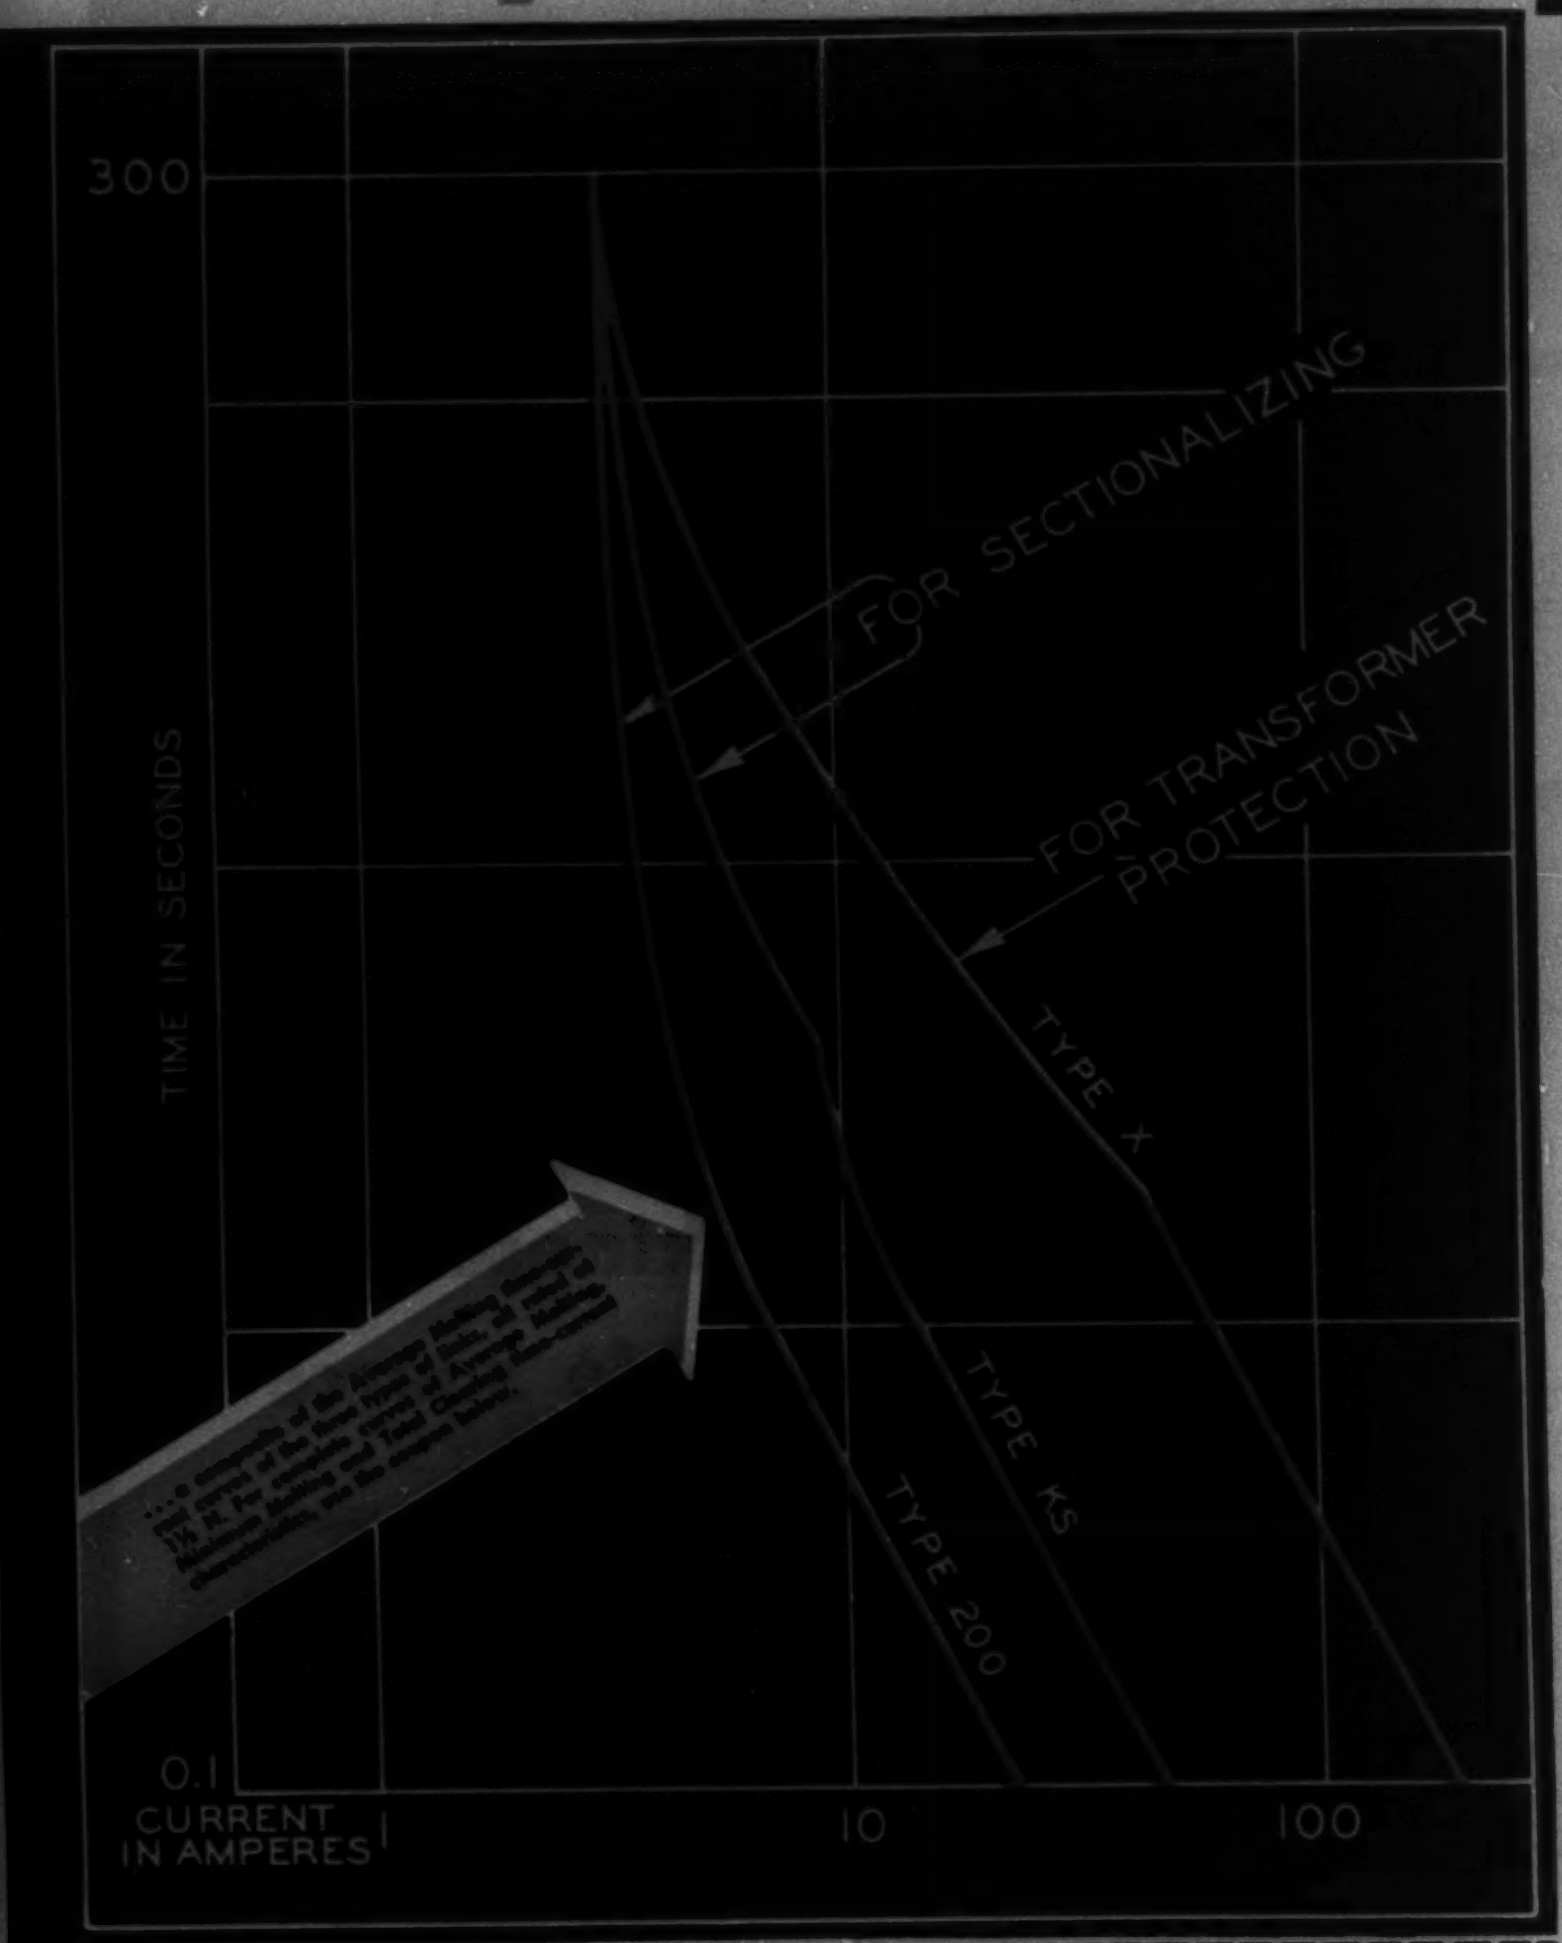

. . . a composite of the Average Melting time-current curves of the three types of links, all rated at 1½ N. For complete curves of Average Melting, Minimum Melting and Total Clearing time-current characteristics, use the coupon below.

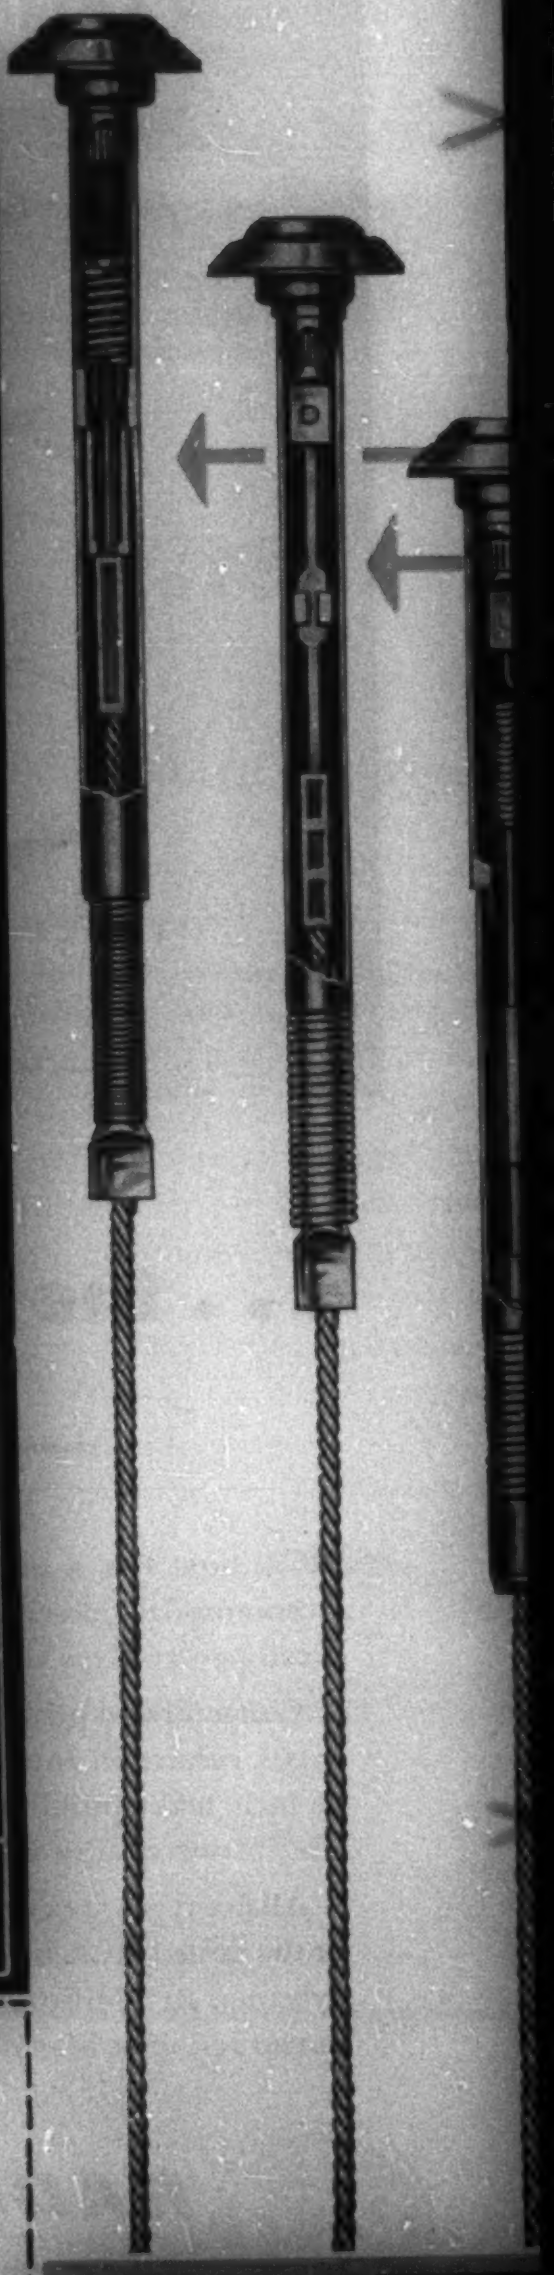

JAMES R. KEARNEY CORPORATION
4236 Clayton Avenue
St. Louis 10, Missouri

83

Gentlemen:

Please send me the complete set of time-current curves on the fuse links checked below:—

☐ **TYPE 200**	*Name*..
☐ **TYPE K-S**	*Company*..
☐ **TYPE X**	*Address*..

BETTE

Fuse Co-ordination

with KEARNEY FUSE LINKS

FAST — **The Kearney Type 200 Fuse Link Isolates Those Troublesome Circuits, Maintaining Service on Adjacent Lines**

MEDIUM — **Reducing Outages on Circuits Subject to Switching and Minor Lightning Surges is a Job for the Type K-S**

SLOW — **The Type X Link Combines Small Transformer Protection With Slow Surge Response, Providing Maximum Service**

Type 200 . . . Certain circuits prove to be more troublesome than others. When a line is subject to dangerous long-time overloads and surges, continuity of service in adjacent circuits demands fast action in isolating the troublesome line. This fast action protection is made possible by the accurate, durable characteristics of the pure tin used in the Type 200 Fuse Link. The low temperature operation of this link assures that peak loads may be carried without danger of outages. This two-in-one feature of the Type 200 Link makes it a "must" in any efficient fuse-coordination plan.

Type K-S . . . Where switching, motor-starting and lightning surges are common, maintain service by using the Type K-S Fuse Link. Low temperature operation accommodates peak loads and dragging overloads with full protection to line equipment and without damage to the cutout. High surge capacity means that the K-S Fuse Link can differentiate between harmless surges and overloads, and those that are damaging. In a thorough coordination plan, fuse links must coordinate not only with other fuses, but also with circuit breakers, and the medium speed characteristic of the K-S Link provides for the proper teamwork.

Type X . . . Designed to match the safe-loading curves of small transformers, the Type X Fuse Link keeps transformers in service during heavy overload periods and surges, and yet fuses in an instant when faults persist or reach dangerous ranges. The slow speed operation means satisfied customers and lowered expense due to unnecessary outages. The high breaking strength of the Type X Link provides security against mechanical failure in applications where apparatus-jarring surges are frequent. Like the other fuses of the Kearney line, the Type X is designed to open at approximately 220% of rated current in five minutes.

KEARNEY
FUSE LINKS

An Exclusive Kearney Feature

An added convenience with all three fuses of the Kearney line is the PUL-TAB FUSE-PAK. Individually wrapped fuse links are packaged in groups of five and cartons of 25, combining maximum protection with the handiness of the PUL-TAB. Fuse ratings are indicated on the TAB, assuring positive identification in the field.

Fuse Link Dispenser . . . Keeping the right link at the right place, at the right time, is easy with the Fuse Link Dispenser. Specially designed for mounting on poles at the cutout location, the dispenser will hold one PUL-TAB FUSE-PAK containing five links.

K
5 AMP
5 AMP
5 AMP

Always Specify JAMES R. KEARNEY CORPORATION ST. LOUIS, MO. *for the Job . . .*

-143

ONSTRUCTION – *SAFER* MAINTENANCE

TYPE 1001-A

Standard-Signal Generator

- MODERATE COST THROUGH SIMPLIFIED DESIGN
- UNUSUALLY LOW LEAKAGE

Rear view, removed from metal cabinet. Semi-unit construction with power supply along top, completely enclosed shielded and filtered carrier oscillator in center, and attenuator, carrier control, audio oscillator and modulation control at bottom.



Cover removed from oscillator compartment. Note two-piece construction of cover, each being insulated from the other and making contact with both surfaces of the metal box housing the oscillator. All leads to this box are carefully filtered to prevent leakage.

The complete oscillator plugs in and out of the metal box shown above, making testing and servicing particularly easy. The oscillator can be operated when removed from its shielding box. Extra precautions have been taken to insure excellent contact between the pre-loaded contact springs and the cylindrical contacts on the oscillator coil turret shown at extreme right

With many mechanical and electrical improvements, the Type 1001-A Standard-Signal Generator replaces the once-popular Type 605.

Ruggedly designed, with unique mechanical construction and simplified circuits, this generator has exceptionally low leakage. Through the elimination of a number of circuit frills it has been possible to keep its cost to a moderate figure.

ABRIDGED SPECIFICATIONS

CARRIER-FREQUENCY RANGE: 5 kc to 50 Mc in eight logarithmic, direct-reading ranges.

FREQUENCY CALIBRATION: accurate to ±1%.

INCREMENTAL-FREQUENCY DIAL: indicates increments of 0.1 per cent of frequency per division up to 15 Mc.

OUTPUT VOLTAGE: open-circuit voltage adjustable from less than 0.1 microvolt to 200 millivolts. Two-volts output available from a second jack.

AMPLITUDE MODULATION: adjustable from 0 to 80% either with 400-cycle built-in source, or over 20 to 15,000 cycles from an external source.

LEAKAGE: stray fields are substantially less than 1 microvolt per meter two feet from the generator.

INCIDENTAL FREQUENCY MODULATION: varies from 10 to 100 parts per million, at 80% a.m., over each range except 15-50 Mc where it may be three times this amount.

ENVELOPE DISTORTION: about 6% at 80% modulation.

NOISE LEVEL: carrier noise level corresponds to about 0.1% modulation.

Fully 90 per cent of the needs for a standard-signal generator for general laboratory use are adequately met in this carefully designed G-R instrument, where the ultimate in accuracy and stability is not required

TYPE 1001-A STANDARD-SIGNAL GENERATOR.......$595.00

GENERAL RADIO COMPANY

Cambridge 39, Massachusetts

NEW YORK CHICAGO LOS ANGELES

Vol. 6
1949

LOW COST Protection

FOR YOUR *RURAL* TRANSFORMERS

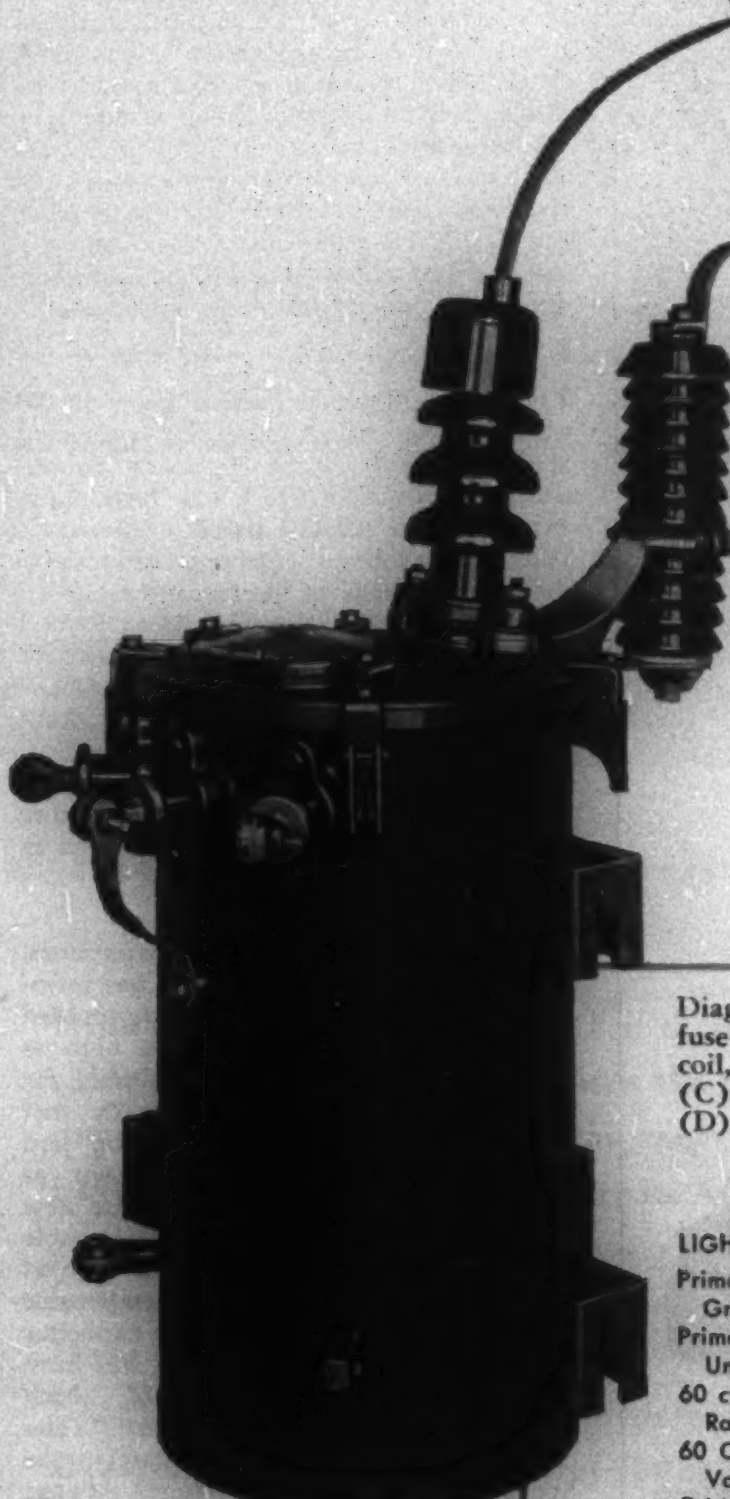

Combination Lightning Arrester and Overload Limiter provides Complete, Low-Cost Protection on Allis-Chalmers Rural Distribution Transformers

COMPLETE PROTECTION for your rural transformers need not be economically out of reach — even on low revenue feeders.

Allis-Chalmers Rural Transformers with combination Lightning Arrester and Overhead Limiter offer as complete protection as you can buy . . . at a saving over many other types because of its simple, thrifty operating principle. By using this arrangement you can economically justify complete electrical protection for all transformers on your system.

SURGE-PROOF OVERLOAD LIMITER

An important feature of this protective combination is the surge-proof overload limiter. Through special two-element fuse design, fuses rated small enough for low sustained tripping values can at the same time withstand momentary load current surges equal to ordinary fuse links rated 4 to 8 times higher! This provides protection against secondary shorts and harmful overloads, eliminates costly and unnecessary storm outages — yet permits safe, efficient utilization of Allis-Chalmers rural transformer overload capabilities.

The protected transformer comes to you completely assembled as a packaged unit, ready to install.

For further details, write for Specification 2557, or call your nearby A-C sales representative.



Diagram of two-element fuse shows (A) heater coil, (B) pull out wire, (C) fusible junction, (D) shunting gap.

RATINGS

LIGHTNING ARRESTER

Primary Phase to Phase Volts, Grounded	9000-13800
Primary Phase to Phase Volts, Ungrounded	6000-9000
60 cycle Fault Current Rating	No Limit
60 Cycle Sparkover Value	34 KV
Critical Impulse Sparkover Value (1½x40 wave)	54 KV

OVERLOAD CUTOUT

Current Rating	50 amps
Maximum Interrupting Capacity	1200 amps

A 2793

ALLIS-CHALMERS, 931A SO. 70 ST.
MILWAUKEE, WIS.

A-C ALLIS-CHALMERS

ALLIS-CHALMERS

(*Continued from page 18A*)

the desirable refinement of a gradual increase in welding current at the beginning of the weld, the new control materially reduces tip pickup in spot welding aluminum, magnesium, and their various alloys. Consequently, more welds can be made before the electrodes must be redressed. The new accessory control is furnished in two types—one intended for mounting in the side of synchronous controls, the other, in a separate enclosure, for use with older types of control and non-synchronous control. Further information on the slope control is also available from G-E's Apparatus Department, at the above address.

Miniature Frahm Tachometer. The James G. Biddle Company, 1316 Arch Street, Philadelphia, Pa., has announced a new low-cost miniature Frahm Resonant-Reed Tachometer. The instrument measures vibrations per minute as well as rpm, and is available in ranges between 1,000 and 13,000 rpm. Additional information concerning the tachometer is contained in Bulletin *31-35*, which is available upon request to the company.

Electrical Insulating Film. A new plastic electrical insulating film for coils which bonds itself into a unified layer of insulation, is a recent product of Minnesota Mining and Manufacturing Company, 900 Fauquier Street, St. Paul 6, Minn. Trademarked "Scotch-Weld," film No. *70*, the film is provided in 60-yard rolls, in widths up to 42 inches, and in thicknesses of two, four, six, and eight mils. After being wrapped around a coil, the film is cured by heat treating at temperatures usually between 200 and 300 degrees Fahrenheit. Dielectric strength varies with degree of heat cure, ranging up to more than 1,750 volts per mil of thickness on a fully cured film. Further information may be obtained from the company.

Protected Transformers. Type ACP transformers, which are self protected against all faults due to lightning, surges, short circuits and overloads, have been announced by Allis-Chalmers, Milwaukee, Wis. High voltage protective links remove the transformer from the line in case of an internal fault. The breaker is calibrated to permit heavy short time overloads without interrupting service and without harm to the transformer. Type ACP transformers are available in ratings of 50 kva and smaller and in voltage classes of 14.4 kv and lower, single phase. Further information may be had upon request to the company.

10,000 Volt Molded Tubular Capacitors. The Sprague Electric Company has introduced small 85 degree Centigrade molded tubular capacitors in ratings as high as 10,000 volts direct current, suitable for high-temperature conditions usually met in television, industrial electronics, and various radio applications. Known as Sprague Type 84P "Telecaps," the new tubulars are molded in non-flammable phenolic that is highly resistant to heat and moisture. An exclusive design permits mineral oil impregnation of the capacitor section after the phenolic casing has been molded around it. Bulletin *214*, which gives complete details of Type 84P "Telecaps," is obtainable upon request to the Sprague Electric Company, North Adams, Mass.

Westinghouse Developments. Westinghouse has announced a Mot-O-Trol packaged adjustable speed drive, which employs electronic precision to provide a wide, stepless range of speed control for d-c motors from a-c sources. It starts motors, brings them up to a pre-set speed, permits change of speed at any time, applies dynamic braking for stopping, and reverses motors. Complete sub-assemblies

(*Continued on page 36A*)

GENERAL ELECTRIC PRECISION INSTRUMENTS—

For Broader Horizons in Laboratory Testing!!

Type PM-10 Multielement Oscillograph

For Increasing the Scope of Your Investigations, Design, and Testing—

The PM-10 oscillograph has provided the answer to many baffling electric and nonelectric problems. You can use it separately for laboratory-type measurement of electric quantities. And, with auxiliary detectors, you can measure such nonelectric quantities as stress, strain, sound, pressure, and vibrations.



Important PM-10 Conveniences—

1. Simultaneous viewing and recording of as many as twelve separate functions.
2. Frequency response up to 7000 cycles per second.
3. Timing lines photographed on the film.
4. Self-contained control rheostats.

More details are available.*

PORTABLE PRECISION POTENTIOMETER for measuring very low voltages

Extremely accurate temperature measurements—even to a fraction of a degree—are now possible with the General Electric Portable Precision Potentiometer. Intended primarily for use with thermocouples, this instrument was especially designed for use outside the laboratory, yet it maintains laboratory accuracy. It can be used to get precise data required for determining the efficiency of turbines, oil burners, and other equipment.

BECAUSE OF ITS EXTREME ACCURACY it can be used to check other high-accuracy thermocouple-type indicating and recording instruments, or for measuring any small, d-c potentials.

A convenient system of keys is provided to enable readings to be taken rapidly. All contacts are enclosed to prevent wear due to dust and dirt conditions.

The entire instrument is housed in an attractive luggage case of modern design. The galvanometer element may be removed and used separately.

***FOR MORE INFORMATION** on these two precision instruments, or any of the hundreds of other laboratory, switchboard, or general testing instruments made by General Electric, see your nearest G-E representative. He will be glad to discuss your particular application. If you don't know where he's located, write to us. We will pass your inquiry on to him. Sect. 602-147 *Apparatus Dept., General Electric Company, Schenectady 5, N. Y.*

GENERAL ELECTRIC

we tune the zephyr's bowstring

Utility men know how breezes can twang a cable—maybe to the point where the conductor fails from fatigue. You may not have known how Alcoa makes sure its ACSR stands up under that vibration:

In Alcoa's Massena testing laboratory, these machines give a cable the shakes, sometimes for years, in order to determine its fatigue resistance. Upward of 500 million cycles are needed to develop the endurance limit of aluminum.

Alcoa research like this made ACSR a reality—now makes it superior. So superior that today eight out of every ten miles of line at 220,000 volts or more are ACSR.

What does that mean to you as a cable buyer? Just this: Alcoa ACSR has been proved and improved through more than 40 years of laboratory testing and installation experience. Aluminum Company of America, 2149J Gulf Building, Pittsburgh 19, Pennsylvania.

ALCOA CABLE AND ACCESSORIES

® ALCOA ALCOA ALUMINUM

HIGH-HEAD REACTION TYPE TURBINES

The Newport News built 60,000 horsepower Francis type turbine of the Nantahala Hydro-Electric development operates under a maximum static head of 1,008 feet at a speed of 450 revolutions per minute. It is one of the highest-head reaction type turbines installed in the United States and one of the highest-powered extremely high-head reaction turbines in the world. A field test by the Gibson method gave a maximum efficiency of 93.7 per cent when operating under a net head of 925 feet. No pressure regulator is included in the installation.

Contracts received by Newport News for turbines of all types and heads aggregate a rated output of 6,283,000 horsepower. At Nantahala, and in many of the world's other great power developments, the engineering efficiency and workmanship of these units have been proven by actual performance.

NEWPORT NEWS

SHIPBUILDING AND DRY DOCK COMPANY

NEWPORT NEWS • VIRGINIA

— *how you are assured* —
— *lower maintenance costs with* —
— **new** *watthour meter, type I-50* —

This 3-head welding machine is one of the many pieces of equipment designed especially for I-50 production. It automatically welds clips to cover rings. This is a small operation, but it's typical of many such operations that all contribute to the accuracy and uniformity of the I-50.

When we assure you of lower maintenance costs with the I-50 meter, we give you our personal *assurance. This comes directly from the people here who build I-50 meters.*

We're proud of the outstanding engineering design behind new features like the magnetic suspension of the rotating element. But we realize that these new features can only be as good as we make them.

So, we employ only specially trained personnel. We have provided them with the best and newest in manufacturing facilities. And, we have in operation a system of rigid quality control.

All this is backed by strong enthusiasm on the part of individual employees—a determination to make the best watthour meter General Electric has ever built.

L. P. Hannaway **Plant Manager**
Somersworth, N. H.

Type I-50, the first completely new watthour meter in 50 years

Order now from your nearest G-E representative. I-50 meters are available in socket- or bottom-connected types with pointer or cyclometer register. Apparatus Department, General Electric Company, Schenectady 5, N. Y.

Exclusive Features for Lower Maintenance

1. Co-ordinated insulation—for better performance under adverse conditions.
2. Magnetically suspended rotating element—to do away with bearing maintenance.
3. Braking magnets die-cast in frame—to assure calibration stability.
4. Current coil molded in butyl and potential coil in polyethylene—for greater insulation and stability.
5. One-piece molded "S" base—to minimize corrosion

GENERAL ELECTRIC
25 000 063

GENERAL ELECTRIC

Resists Shock



High resistance to arcing and excessive voltages as well as ability to withstand severe physical and thermal shock play a large part in the efficiency of Universal Porcelain Insulators. They do not carbonize nor corrode under long years of service. They are unaffected by cold, moisture, fumes, most acids and are heat resistant. Whether your requirements are simple or complex, whether they involve intricate designs or routine production, you will find Universal engineers and craftsmen glad to assist in developing efficient insulators to meet your specifications.

THE UNIVERSAL CLAY PRODUCTS CO.
1545 EAST FIRST STREET
SANDUSKY, OHIO
TRADE MARK

Burlington CONTROL PACKAGE

TYPE GM { FOR ENGINE GENERATOR SETS

- *Automatic and manual voltage regulation*
- *Dual voltage potential transformer*
- *Dual ratio metering transformers*
- *Operating controls conveniently grouped on front of cabinet*

The Burlington Control Package, Type GM, housed in a rugged 14 gauge steel cabinet. Contains essential metering and voltage control for portable or stationary engine generator sets. Fills the need for many applications where a separate switchboard is not desired.

Write for Bulletin GM-100.

BURLINGTON INSTRUMENT CO. Dept. L-99, Burlington, Iowa

CORNISH

Cords AND Cord Sets

APPROVED BY UNDERWRITERS LABORATORIES

Specified by leading manufacturers of Electrical Appliances for industry and the home. We guarantee long service and economy from this SUPER line of Cords and Cord Sets for . . .

IRONS • MIXERS • HEATERS • LAMPS
WASHERS • FANS • PORTABLE TOOLS
RANGES • RADIOS • TELEVISION SETS
VACUUM CLEANERS • REFRIGERATORS
BUSINESS MACHINES

CORNISH WIRE COMPANY, Inc.
15 Park Row New York 7, N. Y.

JUST OFF THE PRESS

YOUR
80-PAGE
MANUAL

The most complete manual on electrical connectors and accessories. Color photographs, charts, data, technical engineering and other valuable information.

WRITE ON YOUR LETTERHEAD TODAY FOR COPY

ILSCO COPPER TUBE & PRODUCTS, Inc.
Cincinnati 27, Ohio

American Standard for ELECTRICAL INDICATING INSTRUMENTS

Part 1 Switchboard and Panel Instruments

C39.1-1949 is a revision of the first American Standard on Electrical Indicating Measuring Instruments, C39.1-1938, approved by the American Standards Association in July, 1938. This new specification is intended to assure that instruments conforming to it will be satisfactory for general industrial use. Price: $1.50; $0.75 to AIEE members for single copies.

Available through the Order Department, American Institute of Electrical Engineers, 33 West 39th Street, New York 18, N. Y.

9-49

the specialist does it better!

As proved by more than 1,000,000 Kvar in over 4,000 capacitor installations, for over a decade on utility systems throughout the world.

CORNELL-DUBILIER CAPACITORS

PRODUCTS OF SPECIALISTS IN POWER-FACTOR IMPROVEMENT

A national average of over a decade of trouble-free utility service proves conclusively that, in the *power-factor improvement field,* the specialist does it better. That the experience of these utilities will be your experience is not a mere paper promise, nor a laboratory hope. For C-D capacitors have stood the test of time in the field—the toughest test of all. For Consistently Dependable results in the field, specify C-D capacitors. Your inquiries are invited.

Cornell-Dubilier Electric Corporation, Dept. B99, South Plainfield, New Jersey. Other plants in New Bedford, Worcester and Brookline, Mass.; Providence, R. I.; Indianapolis, Ind., and Cleveland, Ohio.

Follow the leaders

Demand dependable C-D Capacitors—built by capacitor specialists.

1,980 Kvar; 4,160 volt, WYE; 3 phase; 60 cycle; station-type C-D equipment.

CORNELL-DUBILIER CAPACITORS

1910 1949

Reg. U. S. Pat. Off.

CORNELL-DUBILIER world's largest manufacturer of capacitors

C-D Best by Field Test!

Be specific – Don't just

Use this table

TYPICAL TEST RESULTS ON RUBBER COMPOUNDS

The tabulation below lists representative values that have been obtained in actual tests of these rubber compounds.

PROPERTIES AND TESTS		REPRESENTATIVE TEST VALUES FOR VARIOUS COMPOUNDS						
		AMARINE —40	AMERZONE —0	AMERZONE —B	AMARINE —RWS	AMERITE	AMPEROX	AMERPRENE
BASIC TYPE OF INSULATION		Natural Rubber	Oil-base	Butyl Rubber	Synthetic Rubber	Commercial 30%	Heat-Resistant	Polychloroprene
MAX. REC. COPPER TEMP.		60°C	75°C	80°C	75°C	60°C	75°C	80°C
ELECTRICAL CHARACTERISTICS	Dielectric Constant (Spec. Ind. Cap.)	4.0	4.0	4.0	4.5	4.5	4.5	....
	Ins. Res. (K)	50,000	7,500	40,000	30,000	30,000	20,000	100
	Dielec. strength in volts per mil	450	350	300	400	400	350	200
PHYSICAL PROPERTIES	Tensile Strength in lbs. per sq. in.	2000	600	700	950	1000 Synth. 1500 Nat.	1000 Synth. 1800 Nat.	2000
	Elongation in 2"	450%	300%	400%	450%	500%	500%	500%
	Permanent set	¼"	½"	⅜"	⅜"	¼"	¼"	¼"
ACCELERATED AGING	Type of test	Geer Oven	Geer Oven	Geer Oven	Oxygen Bomb	Geer Oven	Oxygen Bomb	Geer Oven
	Temperature	70°C	80°C	100°C	80°C	70°C	80°C	80°C
	Hours	288	168	672	168	504	336	168
	% Original Tensile Strength	70%	80%	80%	80%	85%	80%	90%
MOISTURE RESISTANCE	Gain in wt. after 7 days immersion at 70°C (Mg. per sq. in.)	25	....	20 or less	15 or less	35	35	30-60
	Capacity increase after 4 weeks immersion at room temperature	15%	15%	15%	10%	15%	15%	....
	Stability Factor 40-80 volts per mil 2 weeks at 50°C	.5%	1.5%	1.0%	.8%	2.0%	3.5%	....
SPECIAL PROPERTIES		High Voltage and Submarine use	Meets IPCEA ozone test	Withstands .03 conc. 10 hours	For hot and moist locations	General purpose rubber insulation	General purpose rubber insulation	Resistant to oil, flame and ozone

As the test data vary considerably with different sizes of conductor and thicknesses of insulation, these identical results can not be guaranteed throughout the whole range of sizes and voltage ratings. Some specific constructions will test higher and others will test lower than the listed values. However, the above table indicates in general what may be expected of these compounds.

AMERICAN STEEL & WIRE COMPANY

say Rubber

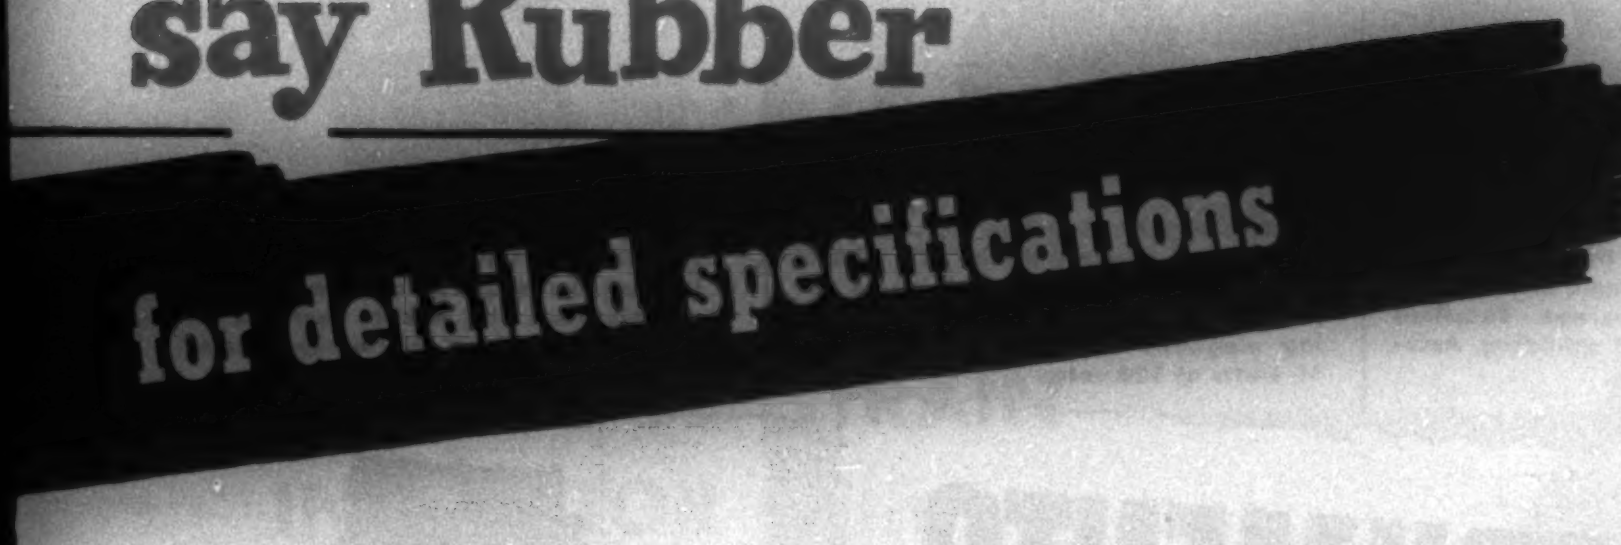

for detailed specifications

THE buyer of rubber-insulated cable today is faced with the dilemma of choosing between natural rubber, synthetic rubber, and a dozen different compounds of each.

The American Steel and Wire Company has always advocated the use of special rubber compounds to meet special requirements. To help you choose the right rubber compound, we recommend that you—

Specify	**For**
AMARINE-40	High voltage service under ground or under water, for all submarine power cables and for general use above 7500 volts.
AMERZONE	Ozone-resistance. Amerzone-0 is an excellent oil-base compound. Amerzone-B is a butyl rubber compound that is highly resistant to heat and moisture as well as to ozone.
AMARINE-RWS	Hot or damp locations. This is a compound notable for having low water absorption combined with excellent heat resistance
AMERITE	General use up to 7500 volts. A compound of the performance type recommended for use where copper temperatures will not exceed 60°C (140°F).
AMPEROX	General use up to 7500 volts where a heat-resistant compound is required for operation at copper temperatures up to 75°C (167°F).
AMERPRENE	Flexible jackets. Owing to its high content of Neoprene, this compound is resistant to oil, flame and sunlight.

AMERICAN STEEL & WIRE COMPANY, GENERAL OFFICES: CLEVELAND, OHIO
COLUMBIA STEEL COMPANY, SAN FRANCISCO, PACIFIC COAST DISTRIBUTORS
TENNESSEE COAL, IRON & RAILROAD COMPANY, BIRMINGHAM, SOUTHERN DISTRIBUTORS
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

The accompanying illustration shows one of our standard constructions with Amerite Performance Grade around conductors; conducting rubber tape for non-metalic shielding when rated over 2000 volts. The cover is of Amerprene, a tough, hard-wearing compound, containing a high percentage of Neoprene. These compounds can be combined in cable constructions to fit the requirements of industrial, mining, and submarine installations.

USS

AMERCLAD CABLES

UNITED STATES STEEL



(Model 901) PORTABLE TEST INSTRUMENTS **available in DC, Model 901—and AC, Model 904, single and multiple ranges of wide coverage. Excellent scale readability and shielding. Accuracy within ½ of 1%.**

SENSITIVE RELAYS **a line of sensitive relays including the Model 705 which provides positive control at levels as low as ½ microampere. Non-chattering magnetic contacts handle up to 10 watts at 120 volts.**

(Model 622) ULTRA-SENSITIVE INSTRUMENTS **portable DC and AC Thermo instruments for precision measurement of potentials and minute currents involving electronics, thermo-couples or laboratory research.**

INSTRUMENTS

TO SPEED AND SIMPLIFY ELECTRONIC PRODUCTION AND MAINTENANCE

Illustrated are but a few of the many specialized instruments available from WESTON . . . all designed to simplify and speed-up electrical and electronic installations, production testing, and maintenance. For details, see your local representative, or write Weston Electrical Instrument Corporation, 664 Frelinghuysen Avenue, Newark 5, New Jersey.

WESTON *Instruments*

ALBANY • ATLANTA • BOSTON • BUFFALO • CHARLOTTE • CHICAGO
CINCINNATI • CLEVELAND • DALLAS • DENVER • DETROIT • HOUSTON
JACKSONVILLE • KNOXVILLE • LITTLE ROCK • LOS ANGELES
MERIDEN • MINNEAPOLIS • NEWARK • NEW ORLEANS • NEW YORK
ORLANDO • PHILADELPHIA • PHOENIX • PITTSBURGH • ROCHESTER
SAN FRANCISCO • SEATTLE • ST. LOUIS • SYRACUSE • TULSA
IN CANADA, NORTHERN ELECTRIC CO., LTD., POWERLITE DEVICES, LTD.

(Model 798) MULTI-PURPOSE TUBE-CHECKER **offering provision for testing Receiving Tubes — Voltage Regulator Tubes—Light Duty Thyratron Tubes such as 2A4—6D4—884—885—2051. Scale is calibrated "Good-Bad" as well as in mutual conductance range.**



PANEL and SWITCHBOARD INSTRUMENTS **a complete line of instruments in all types, sizes and ranges required for switchboard and panel needs . . . including DC, AC power frequencies and radio frequency, rectifier types and D.B. meters.**

(Model 697) VOLT-OHM MILLIAMMETER **one of a line of pocket-size meters, Model 697 combines a selection of AC and DC voltage, DC current, and resistance ranges. Ideal for maintenance testing and many inspection requirements.**

(Model 785) INDUSTRIAL CIRCUIT TESTER **a versatile, portable tester for laboratory or maintenance needs, where an ultra-sensitive instrument is required. Provides 27 AC and DC voltage, AC and DC current, and resistance ranges. (DC sensitivity 20,000 ohms per volt.)**

(Model 779, Type 1) SUPER-SENSITIVE ANALYZER **small, light, compact, 26 range Volt-Ohm-Milliammeter with 5 DC voltage ranges, sensitivity of 1000 or 20,000 ohms per volt. AC temperature compensated. Self-contained power supply. Ideal for many production and test requirements.**

(Model 769) ELECTRONIC ANALYZER **incorporating a conventional Volt-Ohm-Milliammeter with self-contained power source—a high-impedance electronic Volt-Ohmmeter using 115 volt, 60 cycle power—a stable, probe-type, Vacuum Tube Voltmeter, for use to 300 megacycles.**

Once Again HUBBARD Leads the Field!

A NEW WOOD STRAIN INSULATOR with

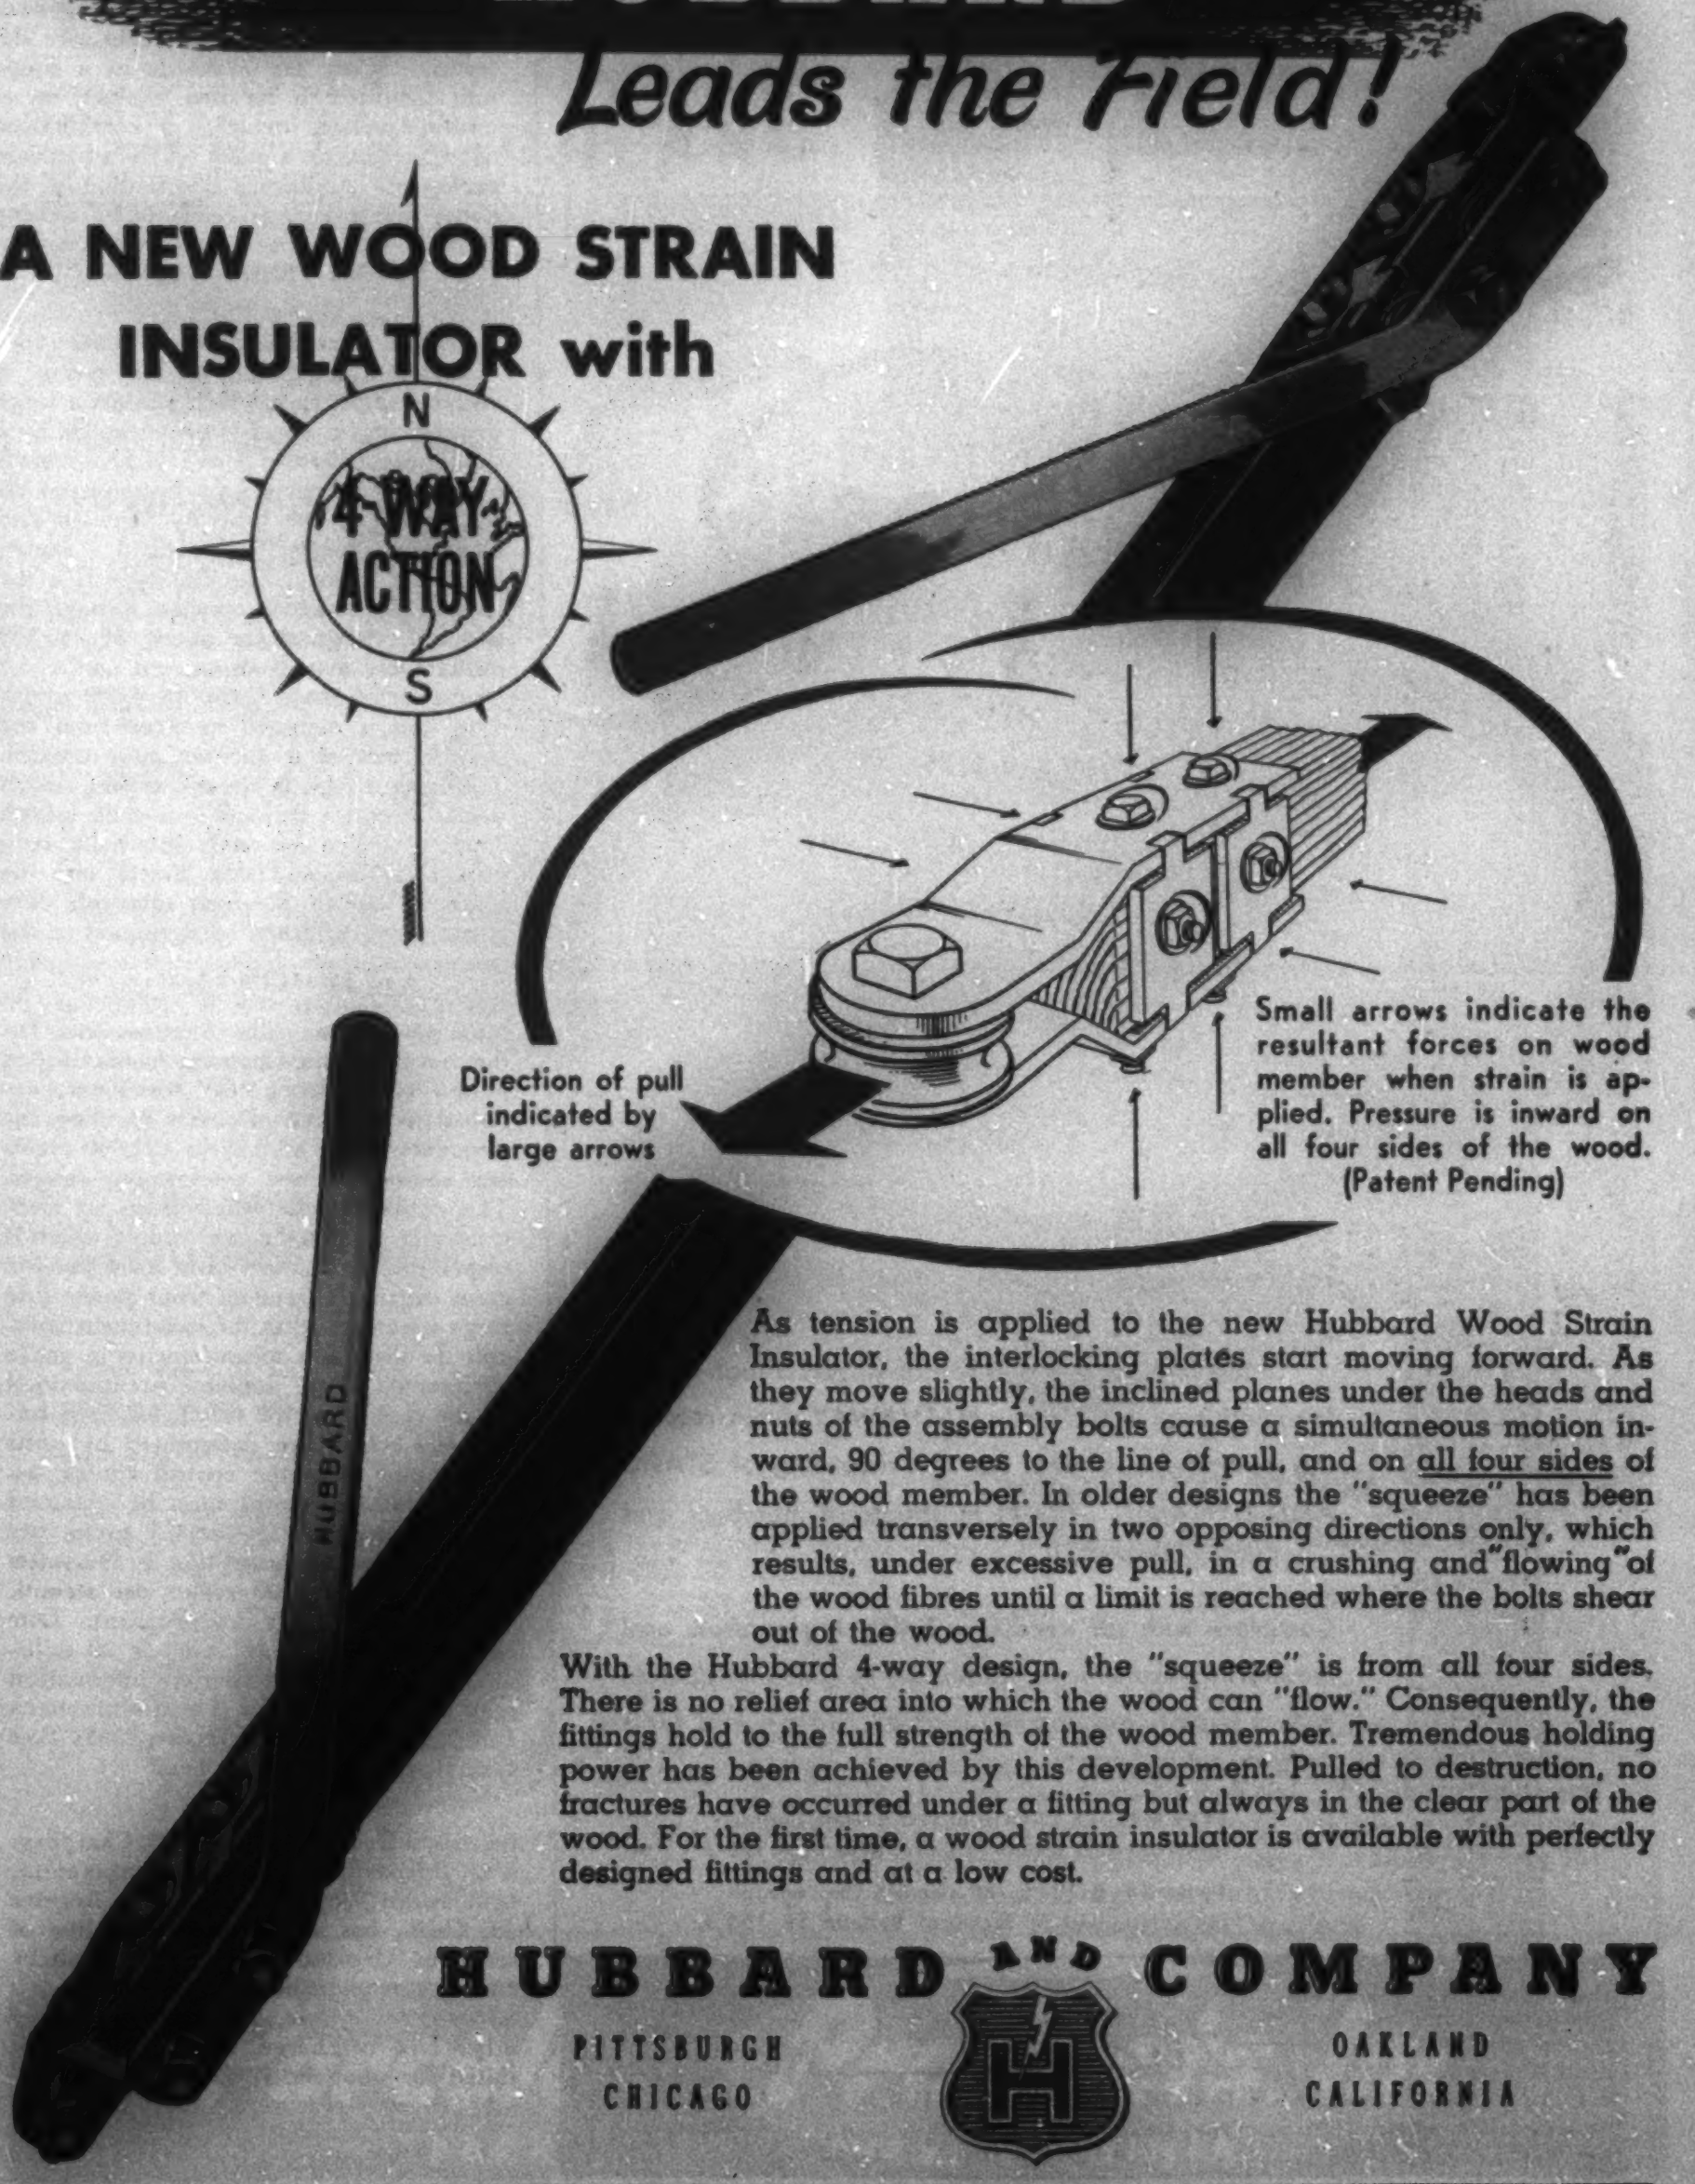

Direction of pull indicated by large arrows

Small arrows indicate the resultant forces on wood member when strain is applied. Pressure is inward on all four sides of the wood. (Patent Pending)

As tension is applied to the new Hubbard Wood Strain Insulator, the interlocking plates start moving forward. As they move slightly, the inclined planes under the heads and nuts of the assembly bolts cause a simultaneous motion inward, 90 degrees to the line of pull, and on all four sides of the wood member. In older designs the "squeeze" has been applied transversely in two opposing directions only, which results, under excessive pull, in a crushing and "flowing" of the wood fibres until a limit is reached where the bolts shear out of the wood.

With the Hubbard 4-way design, the "squeeze" is from all four sides. There is no relief area into which the wood can "flow." Consequently, the fittings hold to the full strength of the wood member. Tremendous holding power has been achieved by this development. Pulled to destruction, no fractures have occurred under a fitting but always in the clear part of the wood. For the first time, a wood strain insulator is available with perfectly designed fittings and at a low cost.

HUBBARD AND COMPANY

PITTSBURGH
CHICAGO

OAKLAND
CALIFORNIA

Equipment for Strain Recording

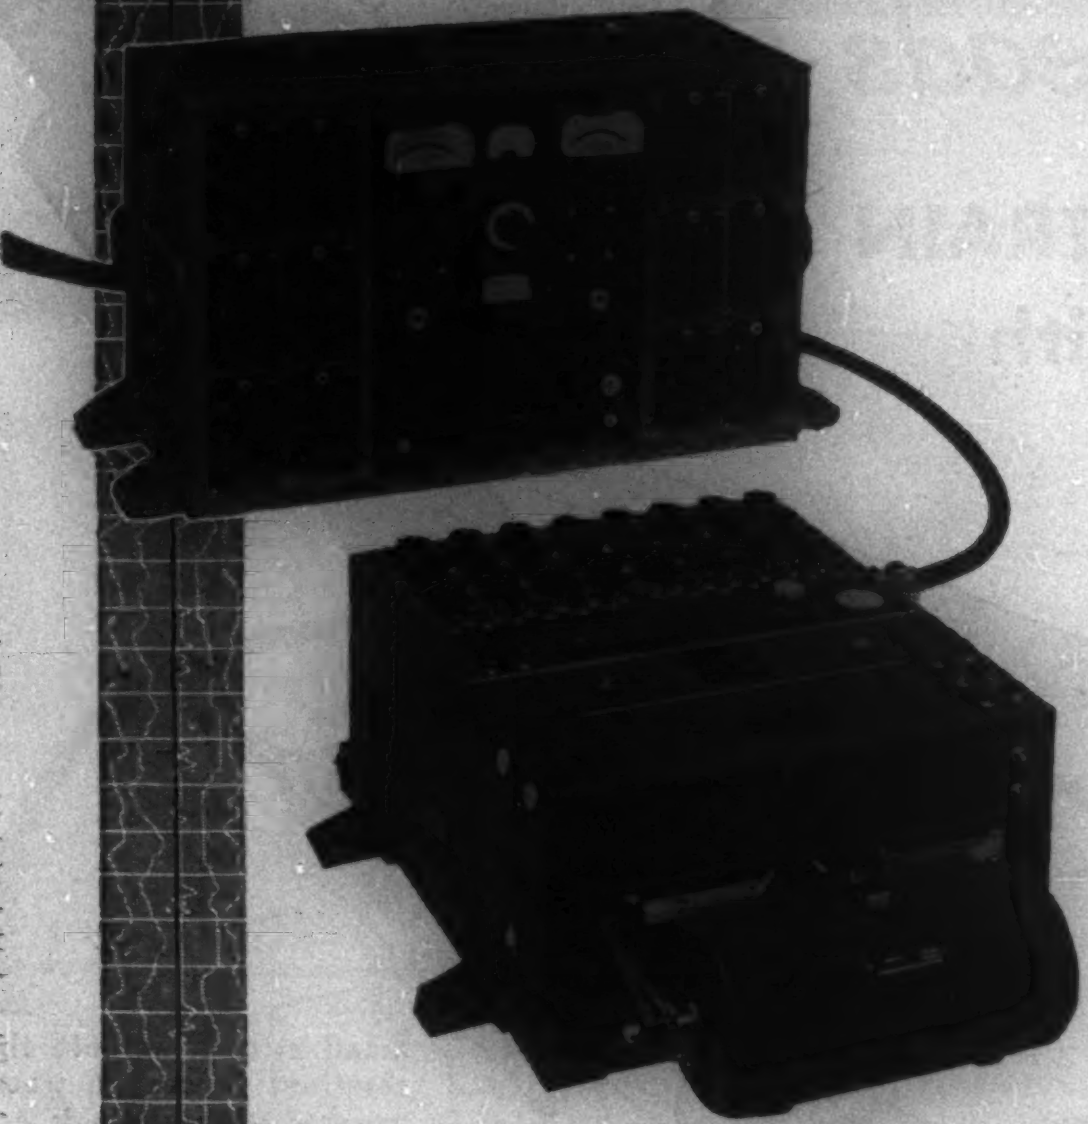

Illustrated is a complete 12-channel portable laboratory for precision strain determination from static strain to a frequency of 5000 cycles per second, using resistance gages that are attached by cement to the points of strain.

In the field or in the laboratory...on a high-speed locomotive or in the air...HATHAWAY strain recording equipment is ideal for the recording of STATIC AND DYNAMIC STRAIN in structural members and machines in operation.

Complete with all necessary balancing controls and monitoring instruments, precision calibrating device, power supply equipment and oscillator, and type S8-B Oscillograph.

TYPE MRC-15 12-element Strain Gage Control Unit. Fully described in Technical Bulletin SP 195 J

Type S8-B 12- to 48-element Oscillograph Fully described in Technical Bulletin SP 165 J

Hathaway
INSTRUMENT COMPANY
1315 SO. CLARKSON STREET • DENVER 10, COLORADO

(*Continued from page 26A*)

can be removed for easy maintenance. Another development at Westinghouse is a set of new universal type electronic detecting relays, designed to operate from initiating circuits or contacts carrying small current at low voltage, for drop wire detection. They are available as a single unit mounted in its own cabinet, or as multiple relays involving a combination of ten circuits on a panel within a common enclosure. Additional information on the above instruments is available by writing to the Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pa.

Saturable Core Reactors. Saturable core reactors, a magnetic device giving a variable impedance which enables a large quantity of a-c power to be controlled by a small amount of d-c power without resorting to moving parts, have been placed on the market in two types by Sorensen and Company, Inc., 375 Fairfield Avenue, Stamford, Conn. The first type is a d-c control circuit which operates through the d-c coil, designed for about 50 to 150 milliampere maximum current and a d-c resistance of about 2,000 to 4,000 ohms. This line is designed to work from the plate circuit of a vacuum tube control. The second type is the a-c power circuit which operates through a-c coils, which consists of two a-c coils internally connected in series. Data sheets on the standard line of Sorensen saturable core reactors are furnished upon request to the company.

New Oscillator. The Southwestern Industrial Electronic Company has developed a new type Model "M" Oscillator, designed as a source of power covering the frequency range of 0.25 to 120,000 cycles per second in five overlapping ranges. The entire circuit is fed from an electronically regulated power supply which is responsible for the low hum level and the great degree of freedom from power line surge effects, making the instrument valuable for distortion measurements in audio equipment. Two positions are provided on the range selector switch for fixed frequencies which are determined by units which plug into the central tuning assembly. Plug-in units may be obtained for frequencies as low as 0.1 cycles per second. Power consumption is 140 watts at 115 volts and 60 cycles per second. Two output circuits are provided. One circuit will deliver 20 volts or 20 milliamperes, rms. Additional information may be obtained from, The Southwestern Industrial Electronic Company, 2831 Post Oak Road, Houston 19, Tex.

Selenium Rectifiers for Battery Charging. The International Rectifier Corporation, 6809 South Victoria Avenue, Los Angeles 43, Calif., has announced a new line of selenium dry-disc rectifiers for battery charging applications. The rectifiers can be used for trickle, taper, quick or any other type of charge, and are especially suited for unattended service due to the high inverse resistance. The individual

(*Continued on page 44A*)

Completely NEW!

IN DESIGN AND PERFORMANCE

BETTER
than anything you have ever seen or tried before.

The answer to John Lineman's Prayer.

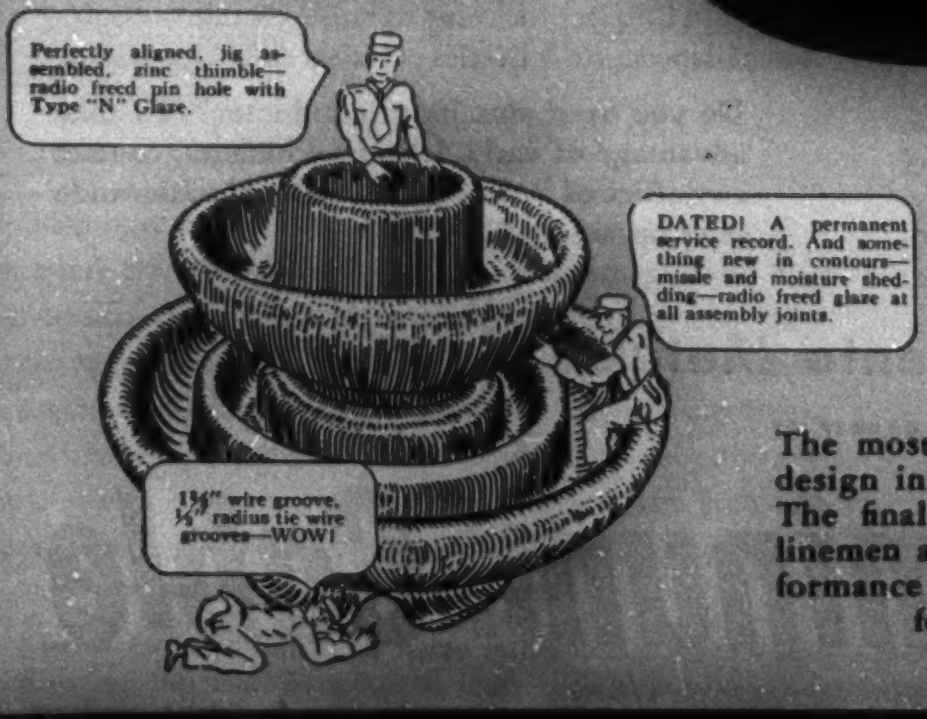
Perfectly aligned, jig assembled, zinc thimble—radio freed pin hole with Type "N" Glaze.
DATED! A permanent service record. And something new in contours—missle and moisture shedding—radio freed glaze at all assembly joints.
1⅜" wire groove. ½" radius tie wire grooves—WOW!

A Complete Line to take care of Every Transmission Pintype Need.
(NEMA Standard)

The most radical departure from conventional insulator design in decades. Many designs were tried and tested. The final design is presented here. Utility Engineers, linemen and management will sing praises over the performance of these insulators for years to come. Write for folder describing the complete new line of Transmission Pintypes.

Porcelain Products, Inc.

PARKERSBURG, WEST VIRGINIA

Aluminum — Kaiser
Kaiser — Aluminum

From Newark, Ohio...
More Kaiser Aluminum Cable!

More than anything we could say, the above picture illustrates the rapidly increasing shipments of Kaiser Aluminum Cable produced by Permanente Metals.

First deliveries were made from centrally located Newark, Ohio last June—*three months ahead of schedule.*

Kaiser Aluminum Cable is being shipped in ever increasing quantities... to electric power projects serving homes, industry and farms throughout the nation.

Fully integrated operations—which control production from bauxite processing to finished cable—assures you of dependable deliveries of Kaiser Aluminum Cable.

Do you need aluminum conductor? To take advantage of early delivery schedules, contact any office of Permanente Products' nationwide sales organization.

Permanente Metals

PRODUCER OF

Kaiser Aluminum Cable

SOLD BY PERMANENTE PRODUCTS COMPANY, KAISER BUILDING, OAKLAND 12, CALIFORNIA . . . WITH OFFICES IN:
Atlanta • Boston • Chicago • Cincinnati • Cleveland • Dallas • Denver • Detroit • Houston • Indianapolis • Kansas City • Los Angeles
Milwaukee • Minneapolis • New York • Oakland • Philadelphia • Portland, Ore. • Seattle • Spokane • St. Louis • Wichita
EXPORT OFFICE, KAISER BUILDING, OAKLAND, CALIFORNIA
Also available through General Electric Supply Corporation, Westinghouse Electric Supply Company, and Line Material Company

cast-in-concrete

Current-limiting Reactors

INDUSTRY'S FAVORITE FOR 35 YEARS

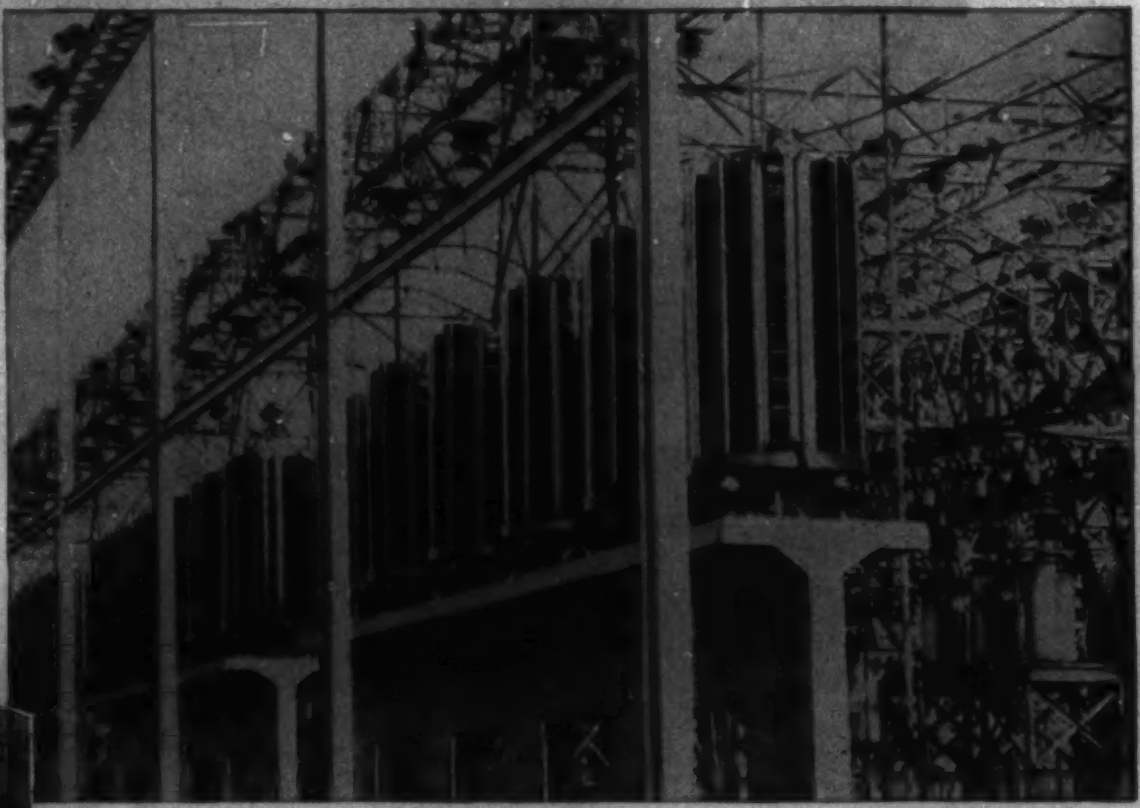

This 25-year-old installation has required practically no maintenance, has given no trouble. It consists of thirty-six 120-kva 3-phase 22,000-volt cast-in-concrete reactors, each giving a 3-per-cent reactive drop.



Metal-enclosed reactors can be matched to switchgear installations, and are becoming increasingly popular for both indoor and outdoor service. Here, three 3-phase reactors are installed between switchgear equipments. As with all G-E metal-enclosed reactors, the enclosure is specially designed to keep stray current—and electrical losses—to the minimum.

Nothing tops these cast-in-concrete reactors in mechanical or electrical strength, in resistance to weathering, or in long maintenance-free life. Conductors and concrete are a one-piece structure—with rock-like resistance to weathering and with the strength and rigidity to withstand short-circuit magnetic forces. Good clearances, elimination of through bolts, and crossovers made within the concrete supports give maximum protection against flashover. Special treatment during finishing processes renders them highly resistant to moisture.

Almost from the day they were introduced, 35 years ago, General Electric cast-in-concrete reactors have outsold all other current-limiting reactors by a substantial margin. And today—wherever you want a reactor to limit short-circuit current, to protect service on other parts of your system or reduce the current-interrupting duty of your breakers—they are still unbeatable.

Usual ratings range from 50 to 1500 amperes, and voltages up to 34,500. Details are given in publication GEA-976. *Apparatus Department, General Electric Co., Schenectady 5, N. Y.*

GENERAL ELECTRIC

SIMPLEX-

SIMPLEX-ANHYDREX NEOPRENE

. . . a great new insulation perfected in the

The Simplex Laboratories have again contributed a remarkable development in the field of rubber chemistry. They have perfected a new rubber insulation. It is the only insulation to combine high temperature resistance, long life and ozone resistance with extremely high electrical stability when exposed to water for extended periods of time. No other insulation combines all these four properties in the same remarkable degree possessed by Simplex-Anhydrex XX insulation. This insulation is truly a remarkable demonstration of the value of the Simplex Research Laboratories as they affect your wire and cable problems.

Simplex-Anhydrex XX has High Heat Resistance

This great new insulation has extremely high heat resistance. Simplex guarantees that Simplex-Anhydrex XX insulation will operate at 176° F. (80° C.) in dry locations up to and including 8,000 volts, and 167° F. (75° C.) under all other conditions of installation and operating voltages. This means increased current loads for cables insulated with Simplex-Anhydrex XX and less chances of failure at times of inevitable overloads than can be safely expected with any other type of high voltage rubber insulation.

Simplex-Anhydrex XX has Great Ozone Resistance

Simplex-Anhydrex XX is, to all intents, inert to the action of ozone, oxidizing agents and sunlight. An 0.010 to 0.015% concentration of ozone by volume is considered a severe test for new, unaged rubber compounds to withstand for only three hours. Yet even after being aged in an air oven for 7 days at 250° F., Simplex-Anhydrex XX insulation will withstand 0.03% concentration for hours and hours. It can safely be said that Simplex-Anhydrex XX

ANHYDREX XX

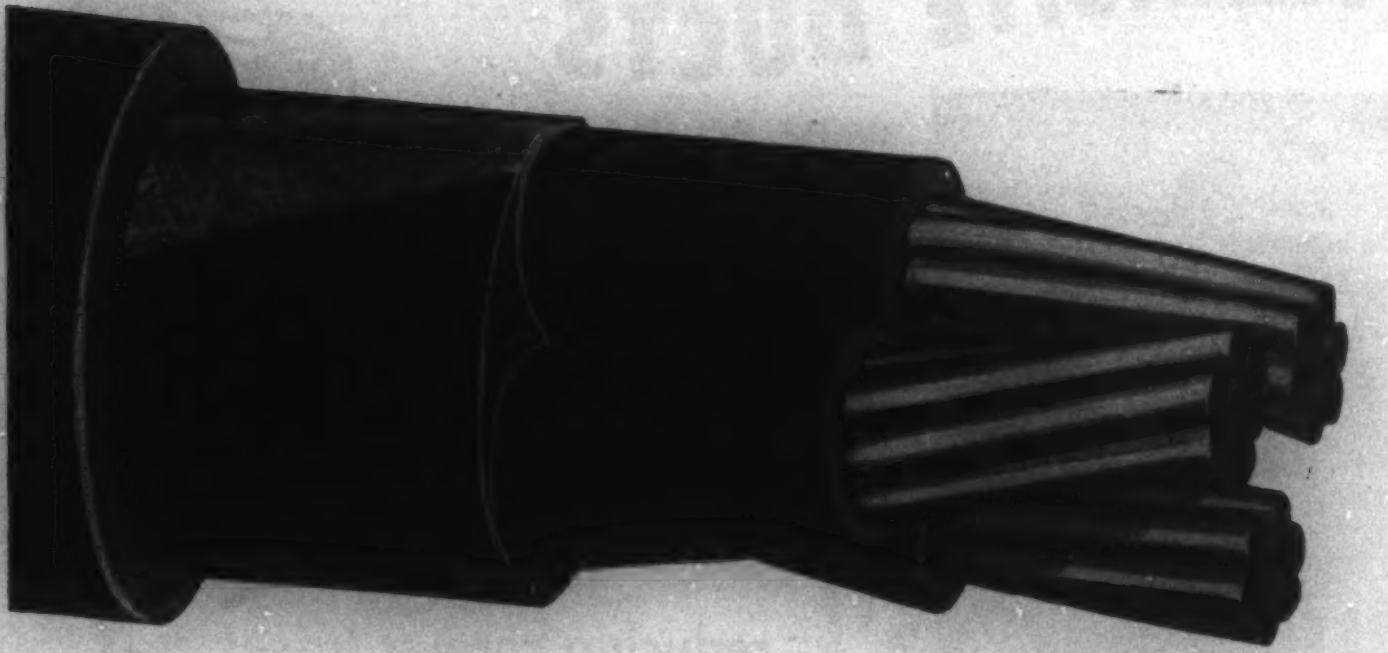

Simplex Laboratories

insulation is practically invulnerable to the attacks of ozone, sunlight and other oxidizing agents. It has, therefore, an extremely long service life.

Simplex-Anhydrex XX has Remarkable Moisture Resistance

Any cable which is put underground, either in ducts or otherwise, needs high resistance to water absorption. Simplex-Anhydrex XX has this resistance to a truly remarkable degree. We will guarantee that the maximum water absorption of Simplex-Anhydrex XX, after the severe aging test of 7 days in air oven at 250° F. (121° C.), will not exceed 15 milligrams per square inch of exposed surface when immersed in distilled water at 70° C. for 7 days.

We will gladly send you further information without obligation, of course, if you will send your inquiry to the address below.

Simplex

WIRES & CABLES

SIMPLEX WIRE & CABLE CO., 79 SIDNEY ST., CAMBRIDGE 39, MASS.

Cables run COOLER...
in TRANSITE DUCTS

... reducing copper losses
... increasing current capacity
... prolonging insulation life

YOU REDUCE copper losses ... increase current carrying capacity ... and prolong insulation life, when you run your cables in Transite* Ducts.

Current carrying capacities can be increased in a typical duct bank as much as 5%, or I^2R losses can be reduced 11%, for cables located in Transite as compared with other ducts used for power circuits.

And, Transite Ducts assure permanent duct banks because Transite is incombustible; is immune to rust and rot; is unaffected by electrolysis; will not slag under action of an arc, and will retain its high original strength.

An unusually smooth bore assures no injury to cable sheath, either in natural movement under load, or when pulling-in cables. Long, lightweight lengths can be quickly and economically installed. In addition, a full line of fittings simplifies even the most complicated of installations.

For full information on Transite Ducts, write for Data Book DS-410. Johns-Manville, Box 290, New York 16, N. Y.

JM

*Reg. U. S. Pat. Off.

How Transite Ducts increase current carrying capacities

Type cable 3 cdr. 500 MCM Compack Sector, 15 KV (6th Edition AEIC Spec.)
No. of cables—3 (all loaded in one bank)
Daily Load Factor—75%
Earth Temp. ambient—20 C

	Transite	Other
Total Therm. Res. to Dielectric Loss (C watts/ft.)	5.66	6.17
Total Therm. Res. to Copper Loss (C watts/ft.)	4.44	4.95
Temp. Rise from Dielectric loss (C)	1.9	2.1
Allowable Rise for Copper loss (C)	59.1	58.9
Allowable Watts per ft. cable	4.44	3.96
Allowable Current—(Amps. per cdr.)	386.	365.
Allowable Current—(Relative %)	105.6	100.

Johns-Manville *Transite Ducts*

TRANSITE KORDUCT—
for installation in concrete

TRANSITE CONDUIT—
for exposed work and installation underground without a concrete encasement

I'm built to take it ...and DELIVER!

RAIN OR SHINE... it makes no difference! Load me or *overload* me, I'm built to take it . . . from the top of my bushings right down to the bottom of my cold-rolled, oriented silicon steel core. Moloney engineers considered everything that could possibly happen to a line transformer and went to work to design a transformer to do the job better. I'm the answer . . . literally a test-tube baby . . . *lighter, smaller, better* . . . with a "Surge-Tested" Design pedigree!

ME49-19

Here's WHY

The cold-rolled, oriented silicon steel used in my core has 30% to 35% greater flux carrying capacity than non-oriented steel. In 3 Kva size I weigh but 125 lbs. including oil, and with CSP attachments only 140 lbs. Yet with less weight I have greater short-time overload capacity and provide better voltage regulation.

Because my cores are smaller, so is my coil. This reflects not only in my weight, but in my size. Ordinary transformers of the same Kva up to 30% larger find difficulty in performing tasks I consider routine. Besides, I don't need nearly as much space in the storeroom, on the line truck, or on the pole.



Short-time *overloads* don't get me down. Customer loads, being what they are, anyone with an ounce of temperature gradient knows that heavy peak overloads are inevitable. So I just keep calm and am thankful for my generously proportioned cooling ducts and maintain a lower hottest-spot-over-oil temperature.

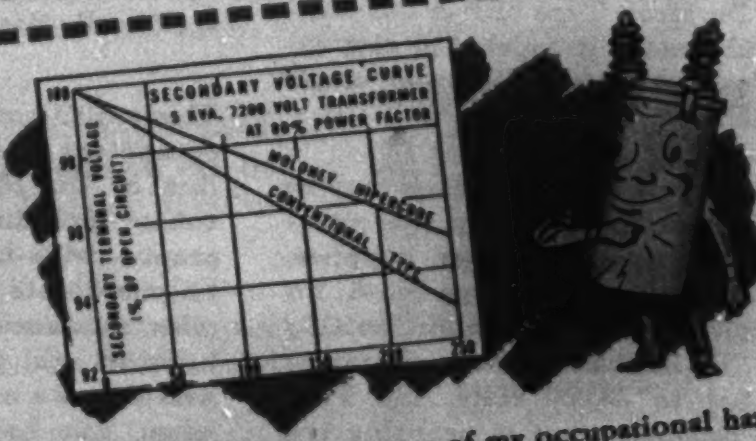

My engineers say that some of my occupational hazards send many young transformers to an early grave. They tell me not to worry though, because my rugged constitution can take these hazards in stride and that I will live a lot longer on the job than many of my contemporaries . . . and perform better!

MOLONEY ELECTRIC COMPANY

Sales offices in all principal cities

FACTORIES AT ST. LOUIS, MO. AND TORONTO, ONTARIO, CANADA

Illustrated: 3 Kva, 7200 to 120/240 volts Conventional Type HiperCore Transformer.

Send for Bulletin H-303 for complete details of HiperCore Transformers.

A WISE *ELECTRONIC* INVESTMENT FOR *ELECTRICAL ENGINEERS* BEGINS WITH A

DU MONT OSCILLOGRAPH

Type 281-A

Type 286-A

A packaged combination.

★ **Here's why:** For your cathode-ray indicator needs you have available, for example, the extremely useful Du Mont Type 281-A. This basic cathode-ray instrument is adaptable to almost any application because it permits a choice of time bases from any external source—linear, logarithmic; driven, recurrent. Also, the brilliant traces of its Du Mont Type 5RP-A Cathode-ray Tube make it capable of displaying the fast writing rates of single transients.

The utility of the Type 281-A may be still further extended by the availability of external power supplies, such as the Du Mont Type 286-A, for examining extremely high writing rates. By increasing the accelerating potential to 29,000 volts, the Type 281-A becomes what is probably the fastest writing and brightest cathode-ray instrument in the world. Writing rates in excess of 400 inches per microsecond are then available!

A further advantage: all of the usefulness of permanent records can be obtained with oscillograph-record cameras such as the Du Mont Type 314-A or 271-A, both of which are specifically designed for the purpose.

This varied combination of Du Mont equipment is illustrative of the full line of Du Mont instruments and tubes—including dual-beam oscillographs, wide-band oscillographs, polar-coordinate indicators, power supplies, accessories—at prices from one-hundred to five-thousand dollars. And always a wise, lasting investment when you begin with a Du Mont instrument or tube!

DETAILED LITERATURE ON REQUEST: EQUIPMENT DEMONSTRATED. NO OBLIGATION.

DUMONT *for Oscillography*

ALLEN B. DU MONT LABORATORIES, INC. PASSAIC, N. J.
CABLE ADDRESS: ALBEEDU, NEW YORK, N. Y. U. S. A.

Instrument Division, 1000 Main Avenue, Clifton, N. J.

(*Continued from page 36A*)

selenium cell sizes range from $1\frac{1}{4}$ by $1\frac{1}{4}$ inches to $6\frac{1}{4}$ by $7\frac{1}{4}$ inches. A special protective coating is applied for corrosive atmospheric conditions. Additional details on the rectifiers may be obtained from the company.

Gamma Ray Detection Tube. An improved type of gamma ray detection tube which is five to six times more sensitive than standard tubes now used for tracing medicinal isotopes; analytical chemistry; searching for radioactive ores; thickness gages; geophysical studies; industrial control; and radiation survey meters, has been announced by the Electronics Division, Sylvania Electric Products, Inc., 500 Fifth Avenue, New York 18, N. Y. Only six inches long and two inches in diameter, the new gamma detector tube, GG306, is self quenching; operates at 960 volts; has an average Geiger threshold of 900 volts; provides 810 counts per minute from five micrograms of radium filtered through 1/8 inches of lead 12 inches from end; has a maximum recovery time of 800 microseconds; a maximum dead time of 100 microseconds; is suitable for an input circuit impedance of five megohms; and has an ambient temperature rating of minus 40 degrees centigrade to minus 70 degrees centigrade. Additional information concerning the tube may be had by writing directly to the company.

Precision Limit Switch. Micro Switch, Freeport, Ill., has developed a new Micro-Limit precision switch, designed for use on all types of machinery and industrial equipment. The switch is field adjustable to operate either clockwise, counter-clockwise, or in both directions. The actuator arm assembly is adjustable through 360 degrees and can be locked at any of 870 positions at intervals of 0.4 degrees. This switch is designed for an electrical rating of 20 amperes, 110, 220, or 460 volts, alternating current; 1/2 ampere, 115 volts, direct current; 1/4 ampere, 230 volts, direct current; 3/4 horsepower, 110 volts, alternating current; $1\frac{1}{2}$ horsepower, 220 volts, alternating current. Further details may be obtained from the company.

Automatic Capacitance Comparator. Recently developed by the Clippard Instrument Laboratory, Cincinnati, Ohio, the *PC-4* automatic capacitance comparator allows an unskilled operator to grade, sort, or check as many as 8,000 capacitors a day, within an accuracy of 0.2 per cent. The instrument tests all types of capacitors, paper, mica, oil-filled, ceramic and electrolytic. The 35-pound instrument requires no outside attachments other than the standard capacitor against which the unknown capacitors are to be checked; and can be connected to any 110 volt a-c outlet. Range is from 10 micromicrofarads to 1000 microfarads. Meter scale reads in per cent, in ranges of minus five to five per cent, minus 25 to plus 30 per cent, and minus 50 to plus 100 per cent.

(*Continued on page 50A*)

REGULEX CONTROL

For Accurate Regulation and Quicker Response

Regulex controlled synchronous condenser at the Vandalia plant of the Illinois Power Company.

WHATEVER YOUR REGULATION PROBLEM — controlling voltage, current, power, speed, tension . . . or any quantity or condition that can be converted into watts, amperes or volts — versatile *Regulex* Control may help you solve it.

As a voltage regulator, *Regulex* Control maintains ½ of one percent sensitivity from no load to full load. In the application above, constant substation voltage is maintained and disturbances caused by sudden load changes or faults are minimized.

Because of its astatic characteristics, high sensitivity and amplification, instant response and maximum forcing, *Regulex* Control is used in power plants to control alternators, synchronous condensers and d-c generators; in steel mills to control voltage, current, tension, speed, speed matching, etc.

Rugged construction means low maintenance costs. Design similar to standard exciters means no specially trained personnel required for installation or maintenance. Call your nearby A-C office, or write direct.

ALLIS-CHALMERS, 931A SO. 70 ST.
MILWAUKEE, WIS.

A-C

ALLIS-CHALMERS

Pioneers in Power and Electrical Equipment from Generation through Utilization

Other Allis-Chalmers Special Control

SYNCHRO-OPERATOR — Automatically synchronizes alternating current generators, tie lines, synchronous condensers, etc.

D.C. POSITIONER — Operates from power plant d-c bus, used for remote indication, control, order telegraph, etc.

ROCKING CONTACT REGULATORS —preferred where the features of mechanical type regulator are desired.

Regulex is an Allis-Chalmers trademark.

A-2798

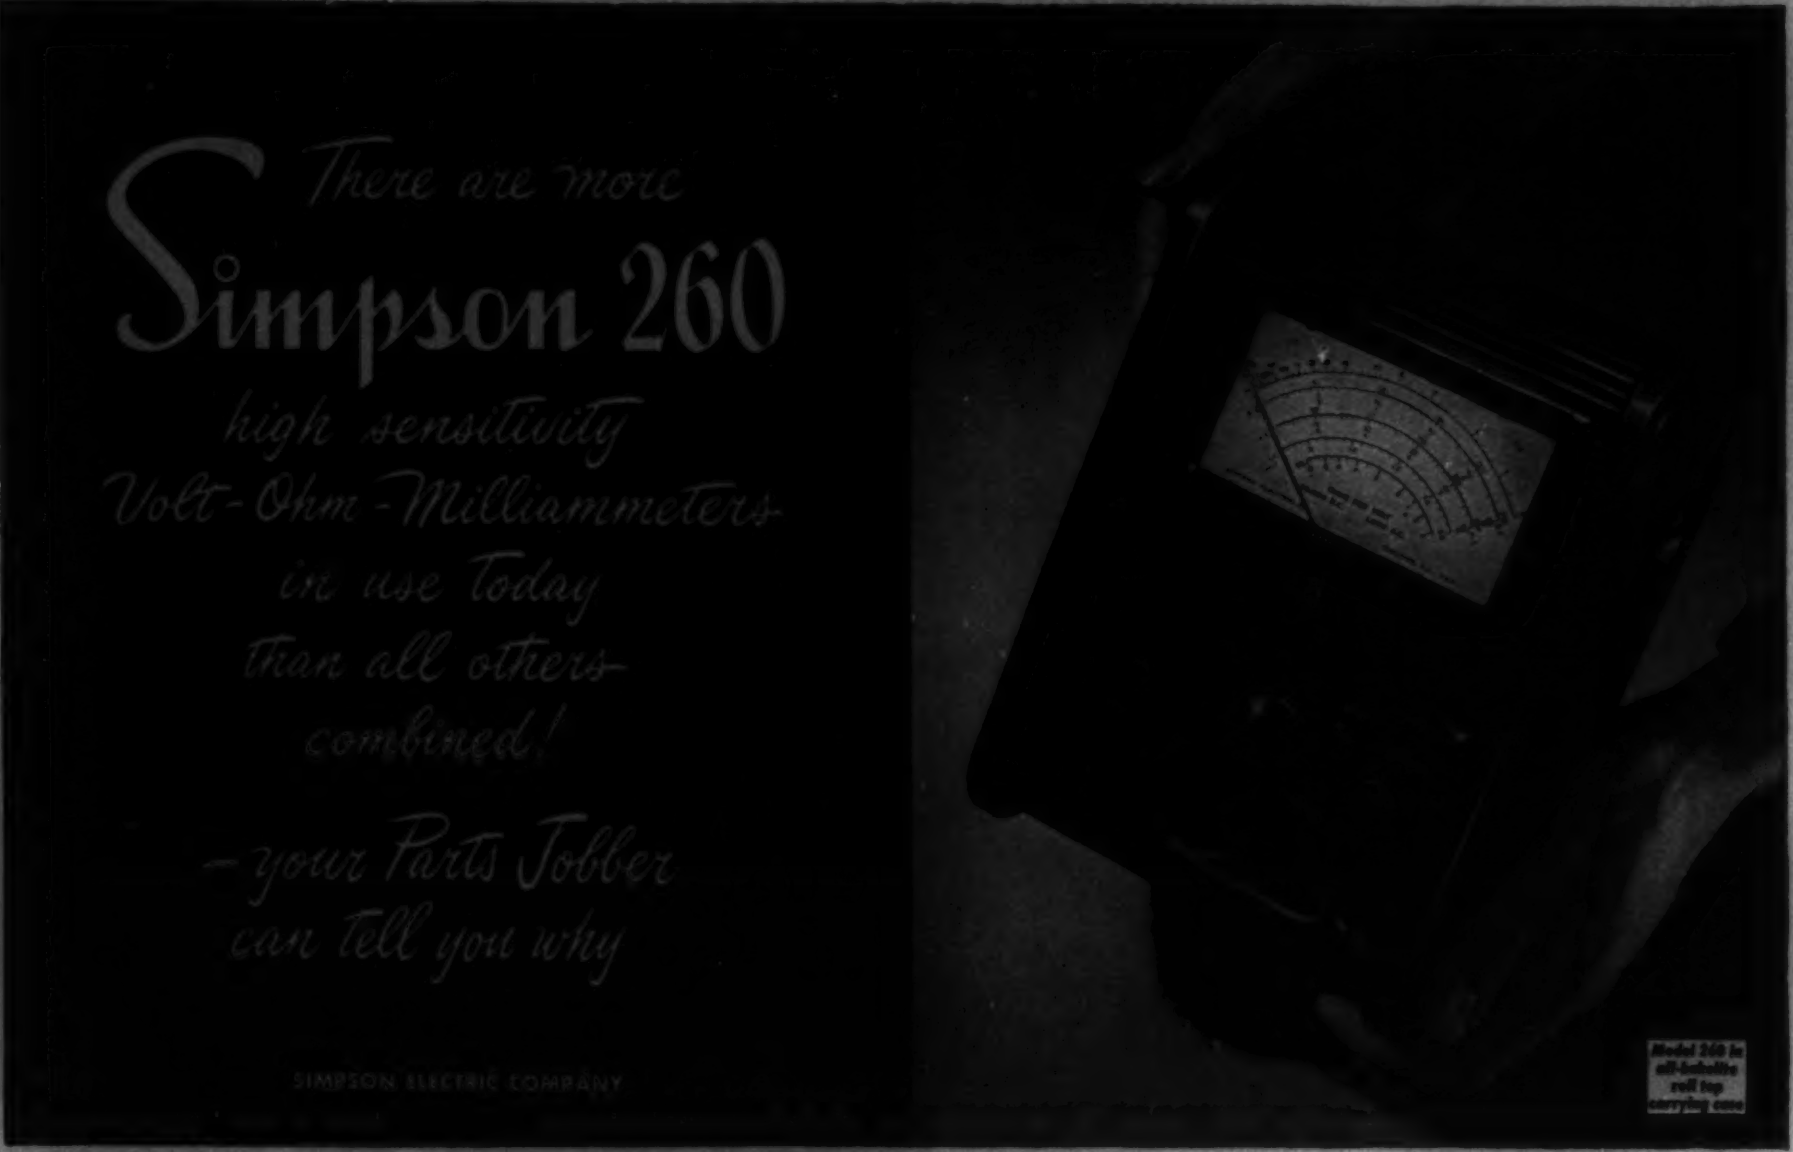

RANGES at 20,000 ohms per volt DC, 1000 ohms per volt AC

VOLTS: AC & DC—2.5, 10, 50, 250, 1,000, 5,000

DC CURRENT: 10, 100, 500 MA—10 AMP—100 MICRO AMP

OHMS: 0-2,000 (12 center), 0-200,000 (1200 center), 0-20 MEGOHMS (120,000 ohms center)

DECIBELS: (5 ranges) —10 to +52 DB

HEADQUARTERS FOR
AUTOMATIC TRANSFER SWITCHES

We can take care of almost any Automatic Transfer Switch requirement ranging from 5 to 1000 amperes. For example, Bulletin 906-105S, as illustrated, is a 300 ampere unit installed in a specially narrow panel for a distribution control center.

Standard features on control panels can include phase failure protection, indicating auxiliary contacts, engine starting contacts and push buttons for engine tests, reset to normal and load transfer. Special features include delayed operation, manual emergency handles, low frequency relay protection. Condensed Catalog No. 700 gives a comprehensive picture of our work along the line of Automatic Transfer Switches and complete Electromagnetic Control Panels.

If you require any type of automatic control, write us. Our 60 odd years of broad experience in the field of Electromagnetic Controls should be helpful.

Automatic Transfer Switches
Remote Control Switches
Contactors Relays
Specialized Electromagnetic Controls

We also manufacture a complete line of Solenoid Operated Valves for Automatic and Remote Control of Liquids and Gases.

Automatic Switch Co.
385-E LAKESIDE AVENUE · ORANGE, NEW JERSEY

LINKING FUNCTION *with* **ADVANCE RELAYS**



Engineers and Designers who insist on dependable components have adapted ADVANCE RELAYS into their control circuits. They are specifying ADVANCE products, and are submitting their relay problems to us. Our expanded engineering and plant facilities, plus the recognized dependability of ADVANCE RELAYS, make it possible for us to offer the most complete line of relays for light, intermediate and heavy duty applications. Proved and Improved relay performance through ENGINEERED adaptability.

Follow the Engineers to ADVANCE

ADVANCE RELAYS

ADVANCE ELECTRIC & RELAY CO.
1260 WEST SECOND STREET • LOS ANGELES 26, CALIFORNIA

Y

SELF-SUPPORTING RoPrene

SECONDARY and SERVICE DROP CABLE

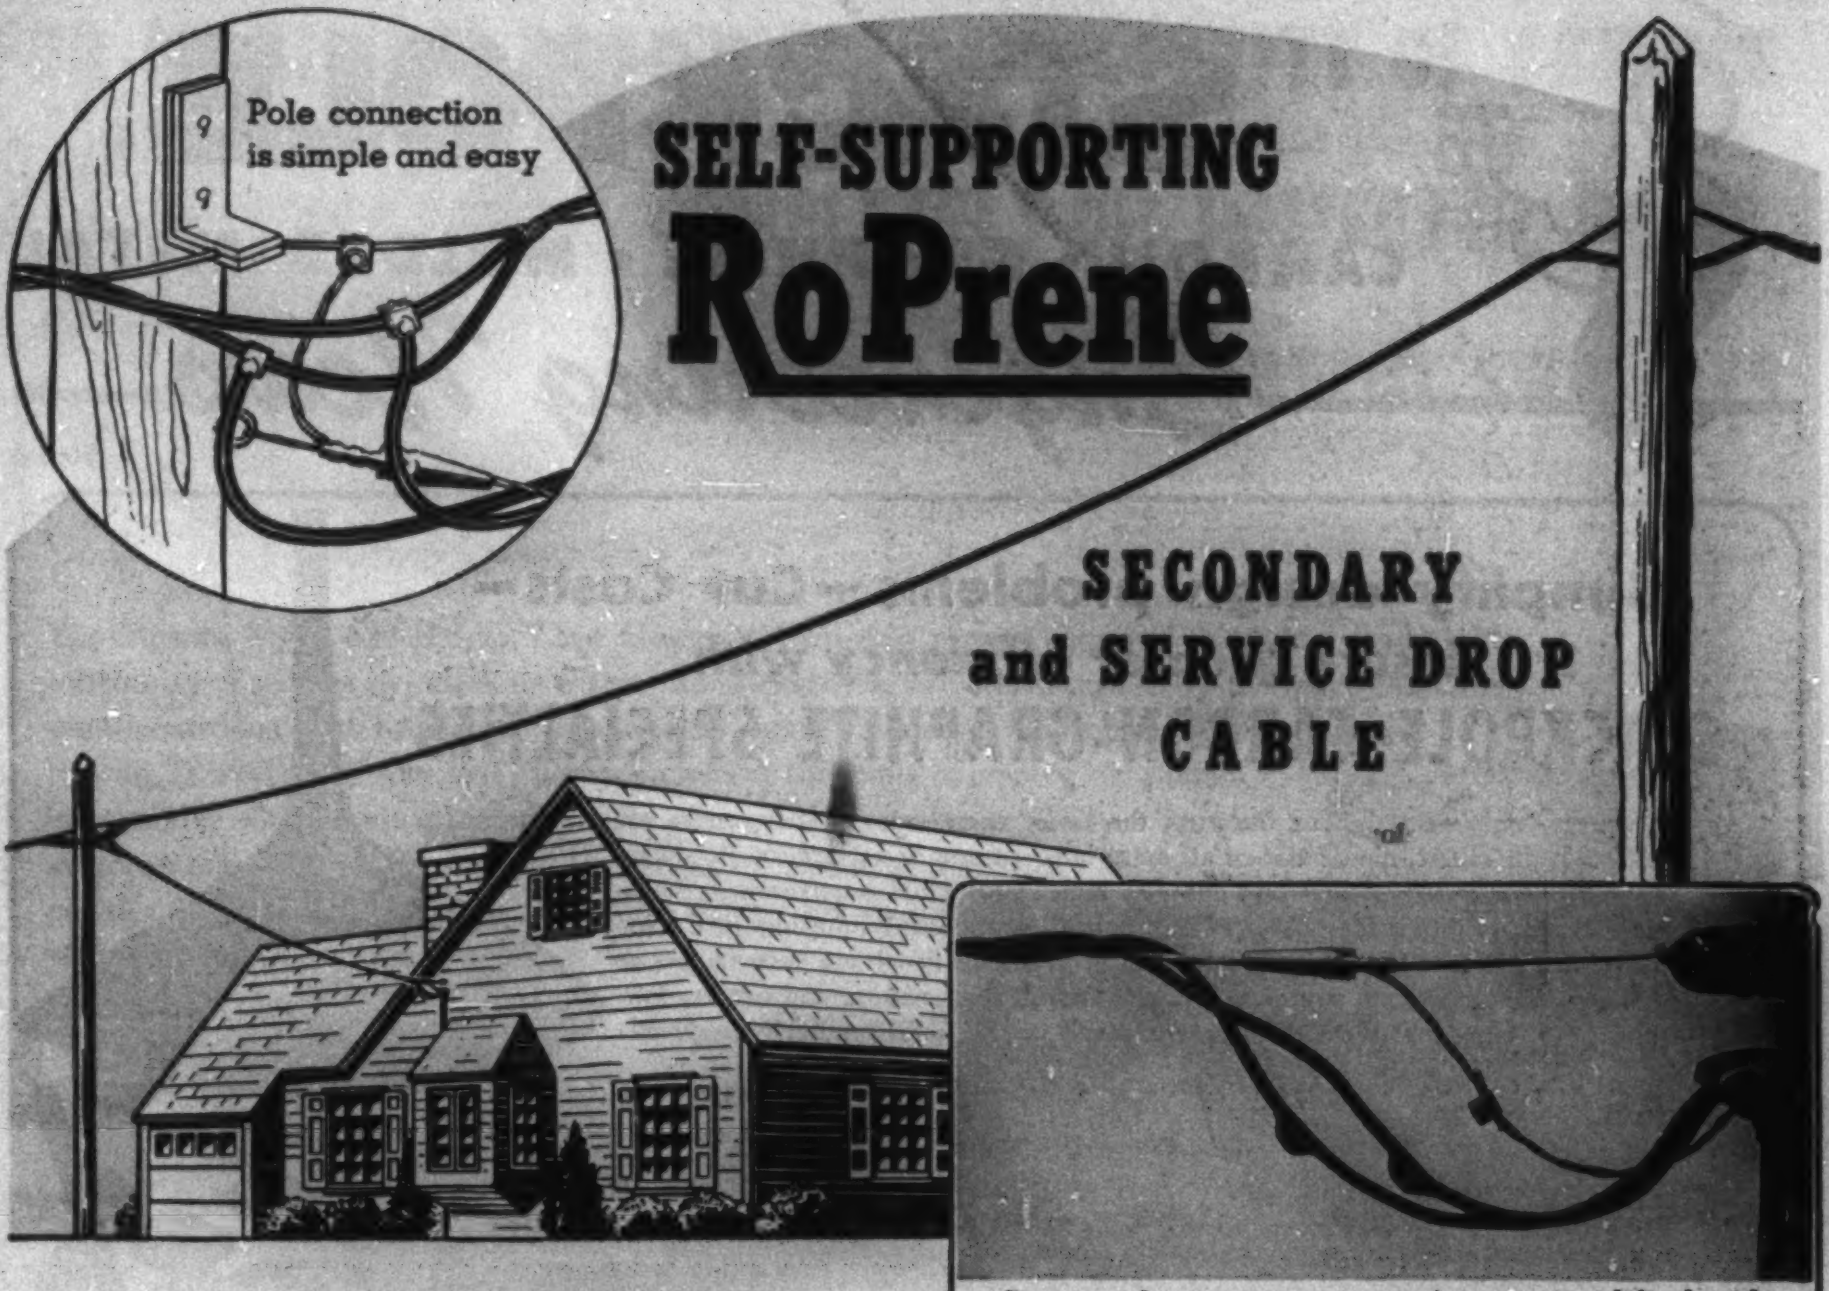
Pole connection is simple and easy

Service drop connection to house simplified with fittings and hardware commercially available.

Photo courtesy Fargo Mfg. Co., Inc.

FOR ECONOMY IN AERIAL SERVICE

As a new development of time-proven construction, RoPrene Secondary or Service Drop Cable consists of RoPrene (Neoprene) insulated power conductors, spiralled around a "straight-away" neutral conductor for mechanical support. Here is simplicity in construction, economy of installation, longer life under all weather conditions . . . plus the neater appearance of a single cable assembly compared to open wires.

These advantages can be yours:

- **Lower Cost**
- **Ease and Economy of Installation**
- **No Mechanical Stress on Power Conductors**
- **No Coverings to Rot and Festoon**
- **High Weather Resistance**
- **Reduced Maintenance**
- **Neat, Compact Appearance**
- **Versatility**

Write today for Bulletin RS-4. See for yourself why, more and more, RoPrene Secondary and Service Drop Cable is becoming the accepted cable for overhead services. Available in a wide range of types and sizes.

FROM BAR TO FINISHED WIRE

ROME CABLE CORPORATION
ROME · NEW YORK

ROME CABLE ROME, N.Y.

STACKPOLE

CARBON • GRAPHITE • MOLDED METAL

Engineering News

No. 6

Simplify design problems—Cut Costs—
Assure greater efficiency with
STACKPOLE CARBON-GRAPHITE SPECIALTIES

More and more throughout industry, the latest engineering developments are utilizing the oldest, most basic of all materials—carbon and graphite. Produced in many styles, shapes, sizes and mixes to match individual requirements, Stackpole carbon-graphite specialties offer practical, economical solutions to a wide range of mechanical, electrical and chemical problems involving such factors as friction, elevated temperatures, corrosion, arcing, shaft sealing and others. Following are but a few of the many standard and special items regularly produced:

CLUTCH RINGS   CHEMICAL CARBONS   FRICTION SEGMENTS
CARBON PILES (Voltage regulator discs)   CONTACTS
GLASS MOLDS   SEAL RINGS AND WASHERS (for gas or liquid)
DASH POT PLUNGERS   BEARING MATERIALS   ELECTROLYTIC ANODES
RESISTANCE WELDING & BRAZING TIPS . . . ***and many more***



HERE'S REAL MOLD and DIE ECONOMY ◀ FOR MANY APPLICATIONS

Carbon and graphite have interesting properties for foundry use as well as for molds and dies in such diverse fields as powdered metallurgy, glass manufacture and rail bonding. In foundry work, for instance, their high heat capacity and conductivity make carbon and graphite highly efficient as chill materials for ferrous and non-ferrous metals. In powder metallurgy, they maintain their strength under pressure at elevated temperatures much better than other materials and hence are widely used as molds for hot pressing tungsten carbide base tool materials. In still other instances, the simplicity of forming accurate carbon or graphite molds and dies lends itself to real economy. Write for suggestions based on your particular molding problem.

NON-WELDING, ARC RESISTANT ELECTRICAL CONTACTS ▶

The non-welding, arc-resisting and non-filming characteristics of Stackpole carbon-graphite contacts make them eminently suited for many applications including use as arcing tips, distributor buttons and contactor and relay contacts. Used in combination with silver or copper, they are highly effective in circuit breakers, Diesel starting switches, relays and practically every type of contact application. Stackpole engineers welcome the opportunity to recommend standard or special contact grades for specific equipment.



WRITE FOR THIS HANDY DATA BOOKLET

Besides describing dozens of specialties, this Stackpole Booklet 40 contains a wealth of practical data on the characteristics of carbon and graphite and their engineering applications.

STACKPOLE CARBON COMPANY, St. Marys, Pa.

FOR MAXIMUM SAFETY AND CONTINUITY OF SERVICE

Rowan COMPLETELY OIL IMMERSED, FUSED, SAFETY LINE DISCONNECT SWITCHES

The Rowan Type 620 Safety Line Discount Switches are designed to provide dependable continuity of service in locations where the atmosphere is contaminated by corrosive elements, semi-hazardous and hazardous vapors and dust. They are equipped with Rowan Time-Tested Air-Seal Fuses which have the same operating characteristics under oil as in air, plus inherently greater interrupting capacity. These switches are widely used in such industries as chemical plants, powder factories, oil refineries, synthetic rubber plants, cement mills and gypsum plants.

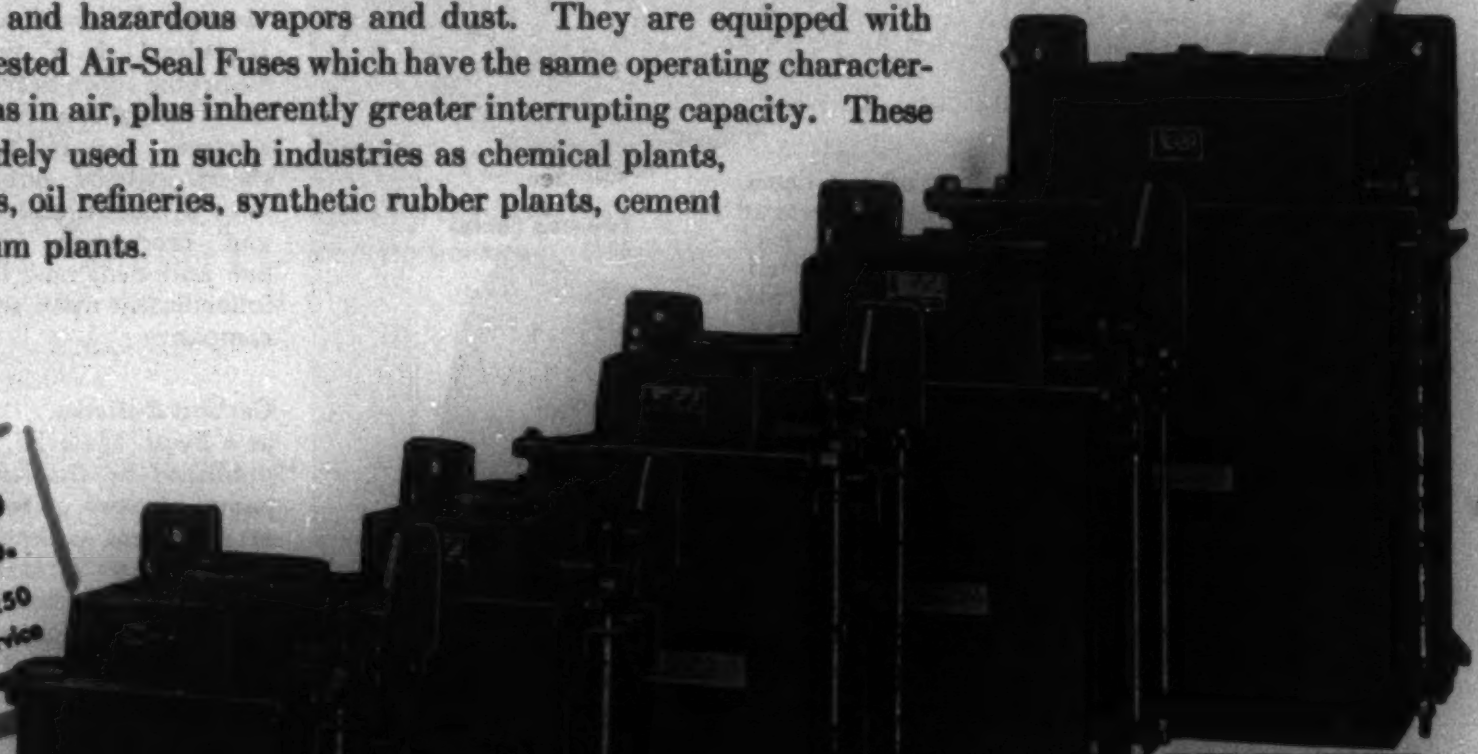

30—60—100
200—400 amp.
Available for 250 and 600 Volt Service



The Rowan Air-Seal Fuse—Introduced by Rowan engineers to provide a low-voltage fuse for use under oil. Cutaway shown at right illustrates unique design. Supplied in 30—60—100—200—400 amp., 250 and 600 Volt.

Standard Features of the Type 620 Disconnect Switch:

1. Completely oil immersed. *2.* Equipped with Rowan Time-Tested Air-Seal Fuses. *3.* Disconnect switch of the quick acting contractor type with renewable contacts. *4.* Provision for locking disconnect switch in the "Off" position. *5.* Safety enclosing case mechanically interlocked to prevent lowering of tank when switch is in operating position or closing of switch when tank is lowered. *6.* Enclosing case is weather-resisting and dust-tight. *7.* Tank handles for ease of handling.

ROWAN CONTROL

THE ROWAN CONTROLLER CO., BALTIMORE, MD.

New Yeoman
TRANSFORMER
gives you
ADC Quality
at
LOW COST

Yeoman Series





Designed to meet the needs of engineers, experimenters and amateurs who demand high quality at low cost, the new **ADC** Yeoman line provides many of the well-known performance standards of the Quality Plus and Industrial series, also several items not previously offered. This has been accomplished primarily by improved production engineering methods, standardization of parts and a simplified type of construction.

The ADC Yeoman line includes:

- Output Transformers with carefully balanced windings offering unusually low distortion over a wide frequency range.
- Interstage Transformers with balanced humbucking features providing equal push-pull grid voltages at high audio frequencies for inverse feedback circuits.
- Power Transformers limited to 55°C. temperature rise and especially quiet in operation.
- Replacement Units for Audio and TV circuits, miniatures, filament transformers, reactors, and many others.

ADC *invites your critical appraisal of this new Yeoman line.*

Audio Develops the Finest

Send for the new **ADC** catalog which you will find convenient to use in selecting almost any transformer you may need. Special requirements not covered by the catalog will receive prompt attention.

ADC Transformers

ADC *Audio* DEVELOPMENT CO.
2853-13th AVENUE SOUTH, MINNEAPOLIS 7, MINN.

(*Continued from page 44A*)

For complete details on the instrument write to the Clippard Instrument Laboratory, Inc., 1125 Bank Street, Cincinnati, Ohio.

TRADE LITERATURE

Cable Installation Catalog. Cable installation equipment manufactured by T. J. Cope, Inc., 711 South Fiftieth Street, Philadelphia 43, Pa., has been listed and fully described in a new catalog, number *62*, by the company. Copies are available upon request.

Electronic Core-Baking. The Induction Heating Corporation, 181 Wythe Avenue, Brooklyn 11, N. Y., producers of thermionic electronic core-baking equipment, have made available a series of data sheets on the electronic core-baking process. The data sheets will be published approximately once a month, and will contain technical and production information. Numbers one and two, now in print, will be sent immediately upon written request to the company.

Carbon Bulletin. "Advantage of Carbon as a Brush Material," bulletin number *13* published by the National Carbon Company, contains a brief history of carbon as a current collecting brush, correlates the properties of carbon to the three primary brush functions of conduction of load current, sliding contact, and commutation, discusses armature winding, the commutation cycle, slip ring brushes, and metal-graphite brushes. A copy of bulletin number *13*, in the company's Modern Pyramid series, may be obtained by writing National Carbon Company, Incorporated, 30 East 42nd Street, New York 17, N. Y.

"E-M Synchronizer." The Electric Machinery Manufacturing Company publishes an informative monthly magazine, the "E-M Synchronizer." Number *26* contains information on application of large synchronous and induction motors and their controls in pulp and paper mills; Number *27* discusses diesel generators, selection and parallel operation of a-c generators; and a special 32-page issue, Number *28*, "The ABC of Large Induction Motors," covers the basic theory, operation, characteristics applications, and control of large induction motors. Copies of these magazines are available from the Electric Machinery Manufacturing Company, Minneapolis 13, Minn., upon written request.

Telecomputing Service Bulletin. The Telecomputing Corporation, 2901 Hollywood Way, Burbank, Calif., an engineering service which computes numerical values and problems essential to converting theory and design into production for the engineering industry, has published a bulletin, *EE*, which describes its services. Copies are available by writing to the company.

SILVER CONTACT SURFACES

to eliminate oxidation troubles

AT NO INCREASE IN PRICE

POWER CONNECTORS

SILVER is used exclusively on *all* G-E connectors because it allows power to flow between conductor and connector with no losses or overheating. This helps eliminate annoying oxidation problems that are a definite maintenance item. The more a connector heats up, the more it oxidizes; and the more it oxidizes, the more it overheats. This vicious cycle continues until the connector fails.

CORRECT MATERIAL for the job is another feature assuring you that G-E connectors "run cool." The composition of the alloy used permits the connectors to carry the maximum current of any conductor on which they are used . . . with no losses and without overheating. By using G-E connectors you're assured of long connector life because of silver contact surfaces and ample current-carrying capacity; double safeguards against oxidation troubles and they don't cost you a cent extra.

CHECK THESE ADDITIONAL FEATURES . . .

SERRATED CONTACT SURFACES give extremely high pull-out strength and a permanent, high-conductivity joint that will resist vibration and give positive pressure on the conductor at all times.

NON-CORRODIBLE HARDWARE is of high-strength bronze alloy that gives tight and trouble-free service. G-E connectors will not twist, distort, or season crack.

INTERLOCKING SIDES confine the strands of the conductor within the conductor enclosure, thus obtaining full advantage of the conductor's current-carrying capacity.

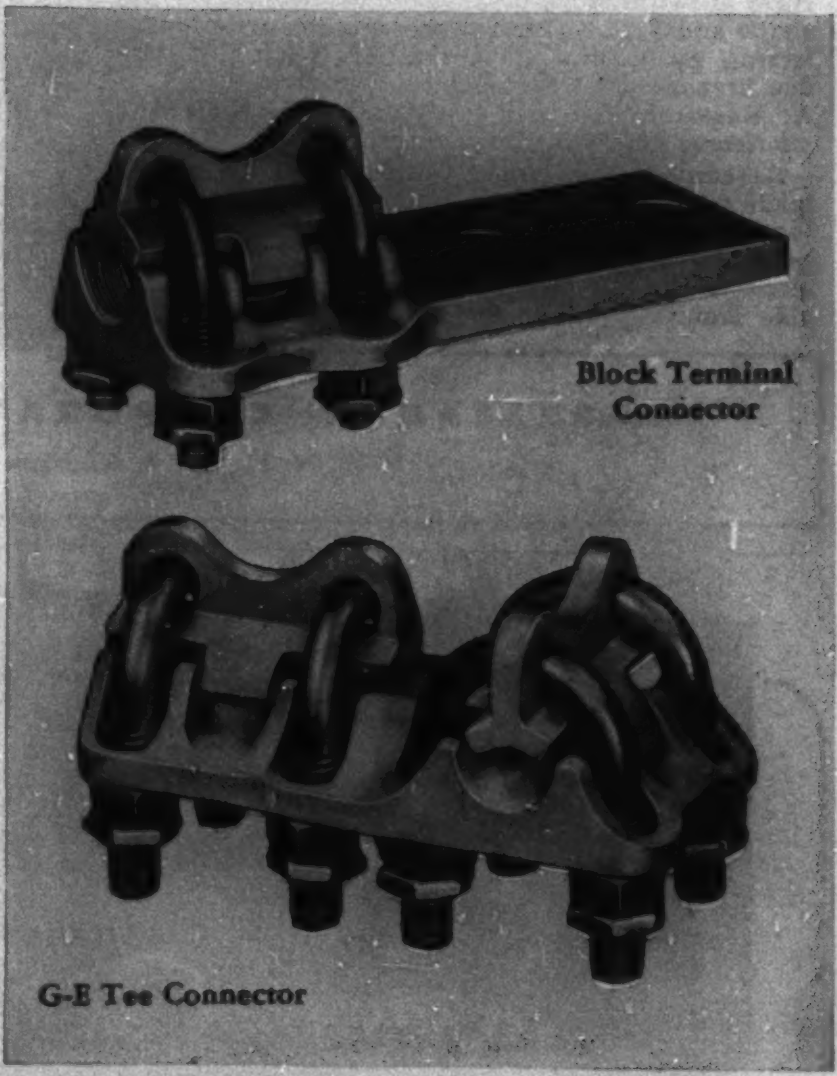

Place an order today with your G-E sales representative and start realizing the many benefits to be gained by using this new line of General Electric connectors. Also, write for a copy of bulletin GEC-400 that contains 40 pages of valuable information on G-E connectors, and see for yourself how easy they are to order. Write to *Apparatus Department, Section 856-52, General Electric Company, Schenectady 5, New York.*

GENERAL ELECTRIC

All These Were Once

DUST COLLECTION PROBLEMS, TOO

48 Carbon Black Plants
208 Metallurgical Installations
205 Acid Plants • 40 Paper Mills
270 Detarring Installations
216 Power Stations
78 Steel Plants • 99 Oil Refineries
and Miscellaneous Installations

Your electrical precipitator installation will be individually engineered...and based on the Research Corporation's *experience* graphically shown by that towering pile of thousands of blue prints.

This knowledge is a valuable asset that will help Research engineers to "tailor-make" your Cottrell installation. For example, they can more quickly determine the right answers to such variables as the size, shape and type of both discharge and collecting electrodes, their relative spacing, flue arrangements and many other factors. At Research you can count on *profitable solutions to individual problems.*

Research Corporation Cottrells can be made as efficient as you desire. They can collect 95% to over 99% of all solid or liquid particles suspended in gas entering equipment. Write for free booklet giving valuable data.

RC-121

Typical One Day Collections

- 250 TONS OF FLY ASH
- 5500 POUNDS OF CONCENTRATED SULPHURIC ACID
- 6 TONS OF SODA SALTS AT PAPER MILL

RESEARCH CORPORATION

405 Lexington Ave., N. Y. 17, N. Y. 122 S. Michigan Ave. Chicago 3, Ill.

STANDARD SIGNAL GENERATOR

MODEL 84—300-1000 Megacycles

OUTPUT VOLTAGE: Continuously variable from 0.1 to 100,000 microvolts. Output impedance, 50 ohms.

MODULATION: Sine Wave: 0-30%, 400, 1000 or 2500 cycles. Pulse: Frequency, 60 to 100,000 cycles. Width, 1 to 50 microseconds. Delay, 0 to 50 microseconds. Sync. output, up to 50 volts, either polarity.

POWER SUPPLY: 117 volts, 60 cycles. (Also available for 117 volts, 50 cycles; 220 volts, 60 cycles; 220 volts, 50 cycles.)

DIMENSIONS: 12" high x 26" wide x 10" deep, overall.

WEIGHT: Approximately 135 pounds, including external line voltage regulator.

Laboratory Standards

Standard Signal Generators
Pulse Generators
FM Signal Generators
Square Wave Generators
Vacuum Tube Voltmeters
UHF Radio Noise & Field Strength Meters
Capacity Bridges
Megohm Meters
Grid-Dip Meters
Television and FM Test Equipment

MEASUREMENTS CORPORATION
BOONTON · NEW JERSEY

AIEE TRANSACTIONS INDEX

A number of copies of the cumulative index covering the papers and discussions published in AIEE TRANSACTIONS during the years 1922–1938 are still available. With the purchase of this index, prices at $2.00 per copy to AIEE members ($3.00 to non-members), a free copy of the cumulative index for the years 1911–1921 will be included. Address order to AIEE ORDER DEPARTMENT, 33 West 39th Street, New York 18, N. Y.

9-49

AIEE TRANSACTIONS VOLUMES WANTED

A refund is offered for the 1942 and 1947 bound volumes of AIEE TRANSACTIONS Please mail (parcel post) to the American Institute of Electrical Engineers, 33 West 39th Street, New York 18, N. Y., printing your name and address upon the wrapper. $4.00 plus postage, will be paid for each volume, provided the books are in a saleable condition.

9-49

these National Coils have been "RAILROADED"

AND THEY'RE STILL GOING!

Field Coils (full AIEE Class H insulation) — which remain tight in the frame because they efficiently dissipate heat, withstand high temperatures and are pre-seasoned



Armature Coils (full AIEE Class H insulation) — hotpressed; all Silicone, mica and glass insulated; for especially long, especially dependable service.

Typical of the exceptional dependability of National Silicone Mica-Glas field coils and armatures is the experience of one of America's leading railroads.

Half a million miles on a diesel-electric locomotive in freight service is often the limit for standard coils. Yet, when the motor with National Silicone Mica-Glass insulated field coils and National Silicone Mica-Glas insulated armature was inspected in their shops after 509,454 miles in freight service, they report:

"The field coils look to be in perfect condition. No sign of working on the pole pieces. The field circuit meggers infinity and clears our hi-pot at 3,000 volts. The armature shows a slight chafing of 3 or 4 coils at the pinion end of the slot. Wedges appear to be in perfect condition and tight. We are returning the unit to a passenger locomotive for further road service."

Everywhere in industry — steel, mining, central stations, railroads, manufacturing plants — National Silicone Mica-Glas insulation is setting new high performance records. If you want extra service from any rotating electrical equipment which faces an unusually rugged job, call in your nearby National field engineer. He'll bring you all the benefits of National experience — *first* in Silicone electrical application.

NATIONAL ELECTRIC COIL COMPANY

★ COLUMBUS 16, OHIO, U. S. A. ★

ELECTRICAL ENGINEERS: MAKERS OF ELECTRICAL COILS AND INSULATION—REDESIGNING AND REPAIRING OF ROTATING ELECTRICAL MACHINES

Professional Engineering Directory

Professional Engineering Directory Card 1" x 2" 6 times $60.00 12 times $90.00

BLACK & VEATCH
Consulting Engineers
Electricity—Water—Sewage—Industry
Reports, Design, Supervision of Construction, Investigations, Valuation and Rates
4706 Broadway Kansas City 2, Missouri

Roland R. Miner Member AIEE
Lottye E. Miner Associate AIEE
MINER & MINER
Consulting Engineers
Design-Development-Investigations
Valuations
Experience in the utility, industrial and appliance manufacturing fields
1825 Tenth Avenue Greeley, Colorado

¶ *PROFESSIONAL SERVICES over a wide range are offered by these cardholders.*

¶ *CONSULT THE DIRECTORY when in need of specialized engineering advice.*

CONSULT
Z. H. POLACHEK
Reg. Patent Attorney
1234 BROADWAY
(At 31st St.)
New York 1, N. Y.
PHONE:
LO. 5-3088

PATENTS TRADEMARKS
NOVELTY SEARCHES COPYRIGHTS
PETER FRIES, JR., E.E.
Registered Patent Attorney
110 East 42nd Street
New York 17, N. Y.
Telephone: MUrray Hill 6-4476

SANDERSON & PORTER
ENGINEERS
AND
CONSTRUCTORS
NEW YORK CHICAGO
SAN FRANCISCO LOS ANGELES

STANLEY B. HARE
Consulting Engineer
Electrical Design
Commercial and Special Motors
3479 Union Pacific Avenue
LOS ANGELES, 23, CALIF.

SARGENT & LUNDY
ENGINEERS
140 South Dearborn Street
CHICAGO, ILLINOIS

JACKSON & MORELAND
ENGINEERS & CONSULTANTS
Design and Supervision of Construction
Reports—Examinations—Appraisals
Machine Design—Technical Publications
BOSTON NEW YORK

WESTCOTT & MAPES INC.
Architects & Engineers
Power Plants Public Utilities
Industrial Plants
New Haven, Conn.

FRANK LEDERMANN, E.E.
Registered Patent Attorney
154 Nassau Street, New York 7, N. Y.
Telephone: BEekman 3-2936

THE J. G. WHITE
Engineering Corporation
Design—Construction—Reports—
Appraisals
80 BROAD STREET NEW YORK

Lockheed
AIRCRAFT CORPORATION
has positions available for
RESEARCH ENGINEERS
in PHYSICS and
ELECTRONICS

These openings are for men who have achieved advance status as researchers in either of these fields and who possess the following qualifications:

1. Advanced degree (preferably Ph.D.);
2. 7–10 years industrial or graduate research experience;
3. Ability to perform mathematical analysis in field of specialization.

Lockheed's research and development facilities are among the most advanced in the aircraft field. The accomplishments of Lockheed's research staff have resulted in the acquisition of new far-reaching scientific studies.

Immediate openings available. Salary commensurate with ability.

If you are interested, and meet the qualifications listed above, send a resume of your training and experience to

LOCKHEED
AIRCRAFT CORPORATION
Employment Manager
Post Office Box 551
Burbank, California

MATHEMATICS
for
ENGINEERS

A series of three articles sponsored by the Subcommittee on Mathematics of the AIEE Committee on Basic Sciences:

"Fitting Functions to Engineering Data"
"Method of Graeco-Latin Squares"
"Partial Differential Equations"

Price $0.30 ($0.15 to AIEE members) for single copies. Address orders to:

AIEE ORDER DEPARTMENT
33 West 39th Street
New York 18, N. Y.

9-49

Engineering Societies Personnel Service, Inc.

New York
8 West 40th St.

Chicago
84 East Randolph St.

Detroit
100 Farnsworth Ave.

San Francisco
57 Post St.

In applying for positions advertised by the Service, the applicant agrees, if actually placed in a position through the Service as a result of these advertisements, to pay a placement fee in accordance with the rates as listed by the Service. These rates have been established in order to maintain an efficient, non-profit personnel service and are available upon request. This also applies to registrants whose notices are placed in these columns.

Apply by letter addressed to the key number and mail to the New York Office. When making application for a position include six cents in stamps for forwarding application to the employer and for returning when necessary. A weekly bulletin of engineering positions open is available to members of the co-operating societies at a subscription rate of $3.50 per quarter or $12 per annum, payable in advance.

Men Available

JUNE GRAD, E.E., Lehigh Univ, honor student. Inter prod, plant engrg, appl-sales. Age 23, no dependents; willing to travel. E-428.

ELEC ENGR, B.S.E.E., 1949; age 23; desires pos any field calling for wide scope of interests and aptitudes. Two yrs exper broadcast stations. Some engrg writing exper. Will travel. E-429.

EXEC ENGR, E.E.; age 51; desires to make change; 32 yrs exper research, des, prod, sales and mngt. E-430.

ELEC ENGR, age 37; 5 yrs exper layouts, tech works, sales contrs of distr installations involving transfmrs, cables, switchgear, capacitors, overhead lines; 5 yrs exper mfg background. Training pwr plants. Br Univ honors degree. Writing ability. East or Midwest preferred. E-431.

GRAD ELEC ENGR, 1942; age 29; 2½ yrs photoelec instrument devpmt and application; 2 yrs elec des for chem plants; 4 yrs naval officer. Desires future in sales. Will go anywhere. E-446.

ELEC ENGR, M.S. degree, 8 semesters teaching, Westinghouse grad trainee; 28, married; initiative, energy and enthusiasm; desires asst professorship; West or Southwest. E-447.

ELECTRONIC ENGR, B.S.E.E., 1949; 27, married; 3 yrs U.S.M.C. Radio Material School; exper as communication technician; desires pos in electronics devpmt. New England preferred. E-448.

ELEC ENGR, B.S.E.E., 1949; 24, single; member Tau Beta Pi. Desires pos with scope for good training in the mfg or contracting bus. Location immaterial. E-449.

ELEC ENGR, B.S.E.E., 1949; 23, married; electronics option; no prev exper but willing to learn; desires devpmt or electronic des work. Midwest or West preferred. E-450-116-E.

ELEC ENGR, M.S.E.E.; age 38; desires respons pos in any of following, electro-mech, indus electronics, control, computing, servo, high freq, 13 yrs active prof exper devmpt and handling men. E-451.

ELEC ENGR, 1949; 26, married; desires distr and transm work; anywhere in U. S. or So. America. E-452.

ELEC ENGR, B.E.E.; age 26; 7 mos util engg; 18 mos field engr, oil refinery constr, installation, testing pwr—control systems. Desires pos des or installation. Prefers south or west U. S. E-453.

ELEC ENGR, B.E.E.; RCA Institute grad; 28, single; exper as Test Equip Des—factory layout for test on radar; communications, television and UHF; taught courses in television. Will relocate and travel. E-454.

ELEC ENGR, Hopkins; desires pos in pwr field. Served in AAF 2 yrs Flight Engr; was employed aircraft indus as inspector, electrical equip. Tau Beta Pi. E-455.

ELEC ENGR, rec grad; 13 yrs business exper stenotypist, office, purchasing, sales work; good command 5 languages; desires pos international co, objective overseas position Arab East or Latin America. E-456.

ELEC ENGR, communications, B.E.E., rec grad (ranked ninth); former Navy Electronic Technician; des, devpmt and research preferred; anywhere in U. S.; salary secondary. E-457.

ELEC ENGR, B.E.E.; 32, married; des, field exper in installation, erection, pub util; 3 yrs foreign exper; inter installation, erection, service; location, East, South, West. E-458.

ELECTRONIC COMM ENGR, B.S.E.E., 1949, Univ of Illinois, upper quarter; 23, single; desires pos as lab asst in Research Lab; available immediately. Location and salary secondary. E-459.

ELEC ENGR, 1949 grad, N.Y.U.; 21 single; desires devpmt work in electronics, servos, UHF; Eta Kappa Nu, Tau Beta Pi; 7th in class; 1st class phone license. Location immaterial. E-460.

ELEC ENGR, 1949 grad, N.Y.U.; age 23; Eta Kappa Nu, Tau Beta Pi; inter in des, devpmt or mfr in electronic instrumentation, microwaves; location immaterial. E-461.

ELEC ENGR, B.E.E., 1949; 26, married; top fifth class; Army Fire Control and 2 yrs drafting. Desires pwr distr or servo-mechanisms training program. Will locate anywhere in U. S. E-462.

Positions Available

PUBLIC RELATIONS ENGINEER for a business managed public utility company. Duties would be of a general public relations nature including relations with the press and radio both from an advertising and news standpoint, and serving as editor of the company's house organ. Must have the ability to lay out advertising, write radio continuity, meet people well and have a good sense for news and considerable ingenuity. Should have had corresponding experience with another electric, gas or water utility. Some traveling within the state. Salary open. Location, Arizona. Y-2538S.

ASSISTANT ENGINEER with at least five years' electrical distribution design and layout experience for 2300 volt municipal project. Temporary, nine months. Salary, $500 a month, plus expenses. Location, northern Brazil. Y-2547.

PROJECT ENGINEER, 28–35, electrical graduate, with four to ten years' design, development experience and some product engineering and industrial electronic experience in automatic control devices in large company, to initiate new product design, supervise pilot manufacture, evaluate worth of devices. Salary open. Location, Brooklyn, N. Y. Y-2569.

ELECTRICAL ENGINEER, not over 35, for a Canadian owned public utility operating in Bolivia. Must have at least six years' experience in this field. Salary open. Excellent opportunities. Y-2601.

INSTRUCTOR to teach basic electrical engineering subjects. Must have Bachelor's degree in electrical engineering although a Master's degree is preferable. Opportunity to work for Master's degree. Position starts September, 1949. Salary, $3200 for nine months. Location, East. Y-2611.

ASSOCIATE PROFESSOR in electrical engineering, 37–42, with an advanced degree and both teaching and industrial experience, to teach courses in the power field, with special emphasis on electrical machinery. Salary, $3000 for nine months. Location, New England. Y-2616.

ELECTRICAL ENGINEERS for extensive power survey for a South American government. (a) Economist with several years' experience, to report on the feasibility of certain developments. (b) Design Engineer experienced on the design of both steam and hydroelectric stations. Salaries open. Location, South America. Y-2637.

ELECTRICAL ENGINEER with urban and rural distribution experience, and some knowledge of irrigation systems operated by electric motors. Should have good knowledge of Spanish. Write stating age, education, experience, salary, availability, etc. Location, Mexico. Y-2654.

ELECTRICAL ENGINEER, graduate, with at least five years' in the design of high voltage, high powered, electric transmission lines, particularly as regards the calculation covering losses, voltage regulation and system stability. Location, eastern Pennsylvania with occasional foreign field work. Y-2663.

STAFF ENGINEERING ASSISTANT, recent graduate, preferably with business electives, upper third of class, knowledge of facilities, extensions and plant modifications encountered in state and municipal gas, water, sewer, electrical highways, tunnels, utilities. Will analyze and examine engineering proposals, progress reports and work of contractors, clients and engineers, interpreting, advising and rendering technical assistance to staff for an investment banking company. Training program 18 months; will require post graduate study of commercial and banking subjects. Will travel. Salary, $275 month. Location, Chicago, Illinois. R-5789.

ELECTRONICS ENGINEER, junior, graduate, electrical, chemical or physicist, some practical and good school experience, with electronic, electro-magnetic or electro-chemical circuiting. Will work with electronic circuiting and problems under direction of a physicist, for a manufacturer of liquid metering equipment. Salary, $4000 a year. Location, Chicago, Illinois. R-5817.

DRAFTSMAN, graduate electrical engineer, 30–45, with six to ten years' experience with electronic devices and equipment; knowledge of circuit design. Will detail electronic circuits from sketches and specifications. Salary, $325–$375 a month. Location, Southwest. R-5827.

CLASSIFIED ADVERTISING

For help and situations wanted, $0.60 per line for AIEE members, others $1.00. Sale and purchase of used machinery, etc., $1.80 per line, minimum 5 lines, maximum 30 lines, not available to dealers. Address orders to: Classified Section, ELECTRICAL ENGINEERING, 500 Fifth Avenue, New York 18, N. Y.

Positions Wanted

FOR YOUR REQUIREMENT for engineer with administrative ability and an excellent background in public utility, gas, and electric engineering, construction and management, full details will be forwarded in reply to your letter. Address: Box 827, ELECTRICAL ENGINEERING, 500 Fifth Avenue, New York 18, N. Y.

GRADUATE ELECTRICAL ENGINEER, BEE Degree, 1½ yrs. exper. with steam in the Navy, 2 yrs. exper. AC Motor design, one yr. Instructor of Electrical Engineering, desires position as sales or application engineer. Age 25, single. Location immaterial. Address: Box 828, ELECTRICAL ENGINEERING, 500 Fifth Avenue, New York 18, N. Y.

ELECTRICAL ENGINEER, B.E.E., age 23, New York State engineer in training, 1½ years utility experience in distribution engineering, desires interesting position with future in power field. Address: Box 829, ELECTRICAL ENGINEERING, 500 Fifth Avenue, New York 18, N. Y.

ELECTRICAL ENGINEER, many years experience with utilities on supervision, design and construction of overhead power lines including 132 kv. Best references. Member AIEE, Registered. Address: Box 830, ELECTRICAL ENGINEERING, 500 Fifth Avenue. New York 18, N. Y.

Positions Open

ELECTRONICS ENGINEER—Well known, 40 year-old manufacturer of electrical and electronic instruments wants research engineer experienced in design of radio electronic apparatus at high radio frequencies, for the development of military and civilian test equipment. Address: Box 697, ELECTRICAL ENGINEERING, 500 Fifth Avenue, New York 18, N. Y.

PROFESSOR OF COMMUNICATIONS ENGINEERING needed for Fall 1949 by Southeastern University. Will be in charge of graduate work and research activities. $6000 for nine months with extra income for summer teaching. Must have Ph.D. or D.Sc. degree. Address: Box 735, ELECTRICAL ENGINEERING, 500 Fifth Avenue, New York 18, N. Y.

WANTED SALES ENGINEER—Insulated Wire and Cable Company, 30 to 40 years old, give complete information first letter. Address: Box 814, ELECTRICAL ENGINEERING, 500 Fifth Avenue, New York 18, N. Y.

ENGINEERS: For professorships all engr. fields, Master's and Doctor's qualify unusually fine positions $4500–7000 nine months. Instructors, bachelors. Give phone, photo, qualifications. Cline Teachers' Agency, East Lansing, Mich.

FOR SALE: Trans. A.I.E.E., Vols. 58, 59, 60, 62, Address: Box 831, ELECTRICAL ENGINEERING. 500 Fifth Avenue, New York 18, N. Y.

NOTE: Closing date for material to be set in the classified advertising column, as well as cancellations for running ads, must be received not later than the first of the month preceding issue; i.e., August first for September issue.

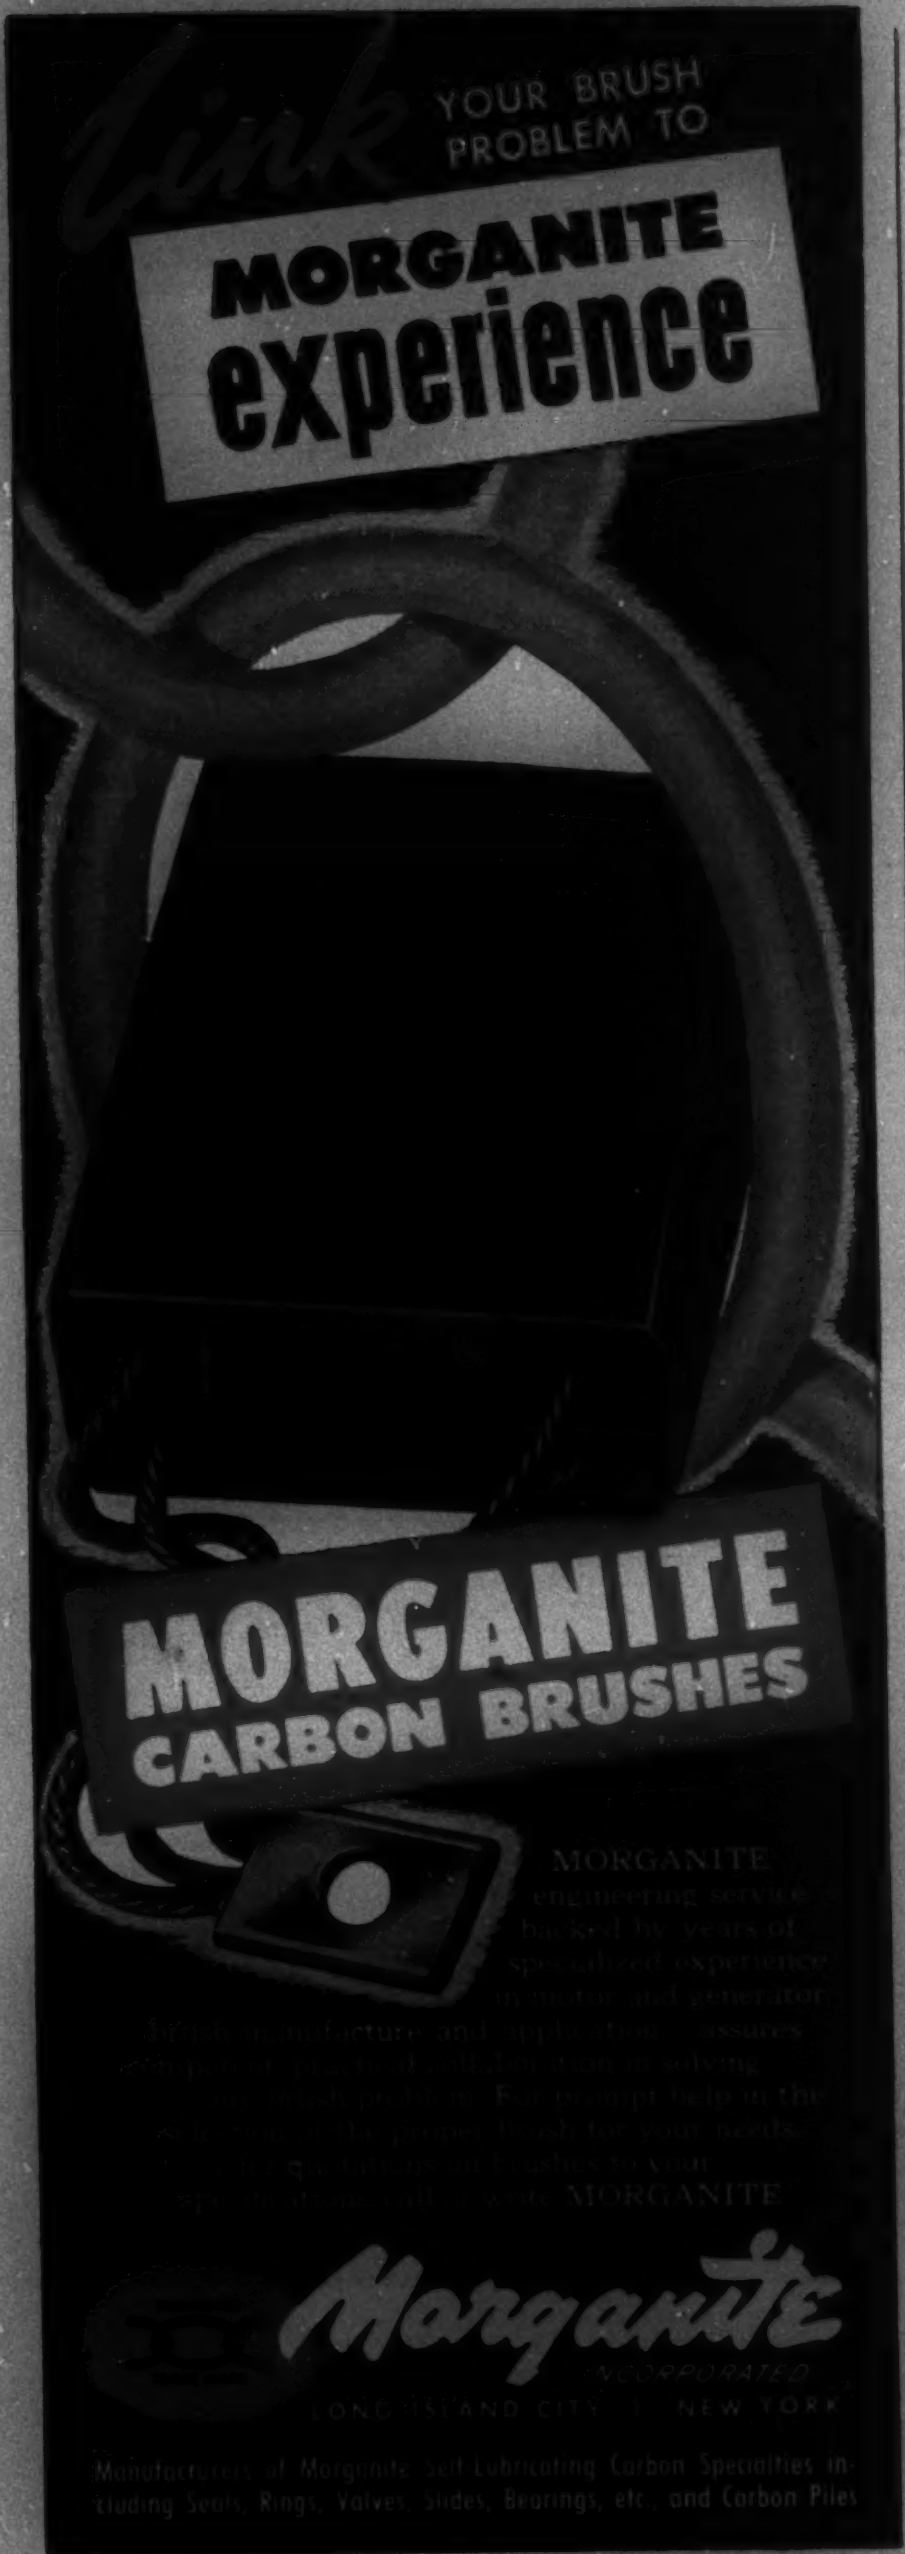

MORGANITE engineering service backed by years of specialized experience in motor and generator brush manufacture and application assures competent, practical collaboration in solving any brush problem. For prompt help in the selection of the proper brush for your needs, or for quotations on brushes to your specifications, call or write MORGANITE

Morganite INCORPORATED
LONG ISLAND CITY 1, NEW YORK

Manufacturers of Morganite Self-Lubricating Carbon Specialties including Seals, Rings, Valves, Slides, Bearings, etc., and Carbon Piles

INDEX TO ADVERTISERS

Acme Electric Corp. . . . . 57 A
Advance Electric and Relay Co. . . . . 46 A
AIEE Special Publications . . . . . 30 A, 52 A, 54 A
American Standards . . . . . 30 A
Allegheny Ludlum Steel Corp. . . . . 8 A
Allen-Bradley Co. . . . . 9 A–10 A
Allis-Chalmers Manufacturing Co. . . . . 2nd cover, 25 A, 45 A
Aluminum Company of America . . . . . 27 A
American Lava Corporation . . . . . 2 A
Anaconda Wire and Cable Co. . . . . 7 A
Arnold Engineering Co. . . . . 20 A
Audio Development Co. . . . . 50 A
Automatic Switch Co. . . . . 46 A

Bell Telephone Laboratories . . . . . 6 A
Biddle Co., Jas. G. . . . . 11 A
Burlington Instrument Co. . . . . 30 A

Classified Advertising . . . . . 55 A
Cole Electric Co. . . . . 58 A
Cornell-Dubilier Electric Corp. . . . . 31 A
Cornish Wire Co. . . . . 30 A

Dow Corning Corp. . . . . 14 A
Du Mont Laboratories . . . . . 44 A

General Electric Co. . back cover, 12 A–13 A, 26 A, 29 A, 39 A, 51 A
General Radio Co. . . . . 24 A
Graphite Metallizing Corp. . . . . 18 A

Hathaway Instrument Co. . . . . 36 A
Hubbard and Co. . . . . 35 A

Ilsco Copper Tube and Products Co., Inc. . . . . 30 A
Industrial Notes . . . . . 18 A, 26 A, 36 A, 44 A, 50 A
Insulation Manufacturers Corp. . . . . 4 A
International Resistance Co. . . . . 16 A–17 A
I-T-E Circuit Breaker Co. . . . . 3rd cover

Johns-Manville Corp. . . . . 42 A

Kearney Corp., James R. . . . . 22 A–23 A
Kerite Co., The . . . . . 15 A

Lockheed Aircraft Corp. . . . . 54 A

Measurements Corp. . . . . 52 A
Moloney Electric Co. . . . . 43 A
Morganite, Inc. . . . . 56 A

National Electric Coil Co. . . . . 53 A
Newport News Shipbuilding and Drydock Co. . . . . 28 A

Ohio Brass Co. . . . . 19 A
Okonite Manufacturing Co. . . . . 5 A

Permanente Metals Co. . . . . 38 A
Personnel Service, Inc. . . . . 55 A
Porcelain Insulator Corp. . . . . 57 A
Porcelain Products, Inc. . . . . 37 A
Professional Engineering Directory . . . . . 54 A

Radio Corporation of America . . . . . 21 A
Research Corp. . . . . 52 A
Rome Cable Corp. . . . . 47 A
Rowan Controller Co., The . . . . . 49 A

Simplex Wire and Cable Co. . . . . 40 A–41 A
Simpson Electric Co. . . . . 46 A
Stackpole Carbon Co. . . . . 48 A

United States Steel Corp. . . . . 32 A–33 A
Universal Clay Products Co. . . . . 30 A

Vickers Electric Division . . . . . 57 A

Weston Electrical Instrument Corp. . . . . 34 A

When Your Problem
IS
ELECTRICAL
PORCELAIN

PINCO INSULATORS

. . . it pays to put it up to Pinco, as the users of this transformer bushing can testify. With Pinco engineering help they get a design that does the job with protection to spare . . . and can be produced speedily and economically in Pinco's modern plant. And . . . they get Pinco Porcelain, unexcelled for electrical and mechanical strength!

For the same help on other transformer bushings for other voltages, current and construction or any other special electrical porcelain with or without metal parts—put your problem up to Pinco! Inquiries welcomed.

The Porcelain Insulator Corporation
763 MAIN STREET • LIMA, N. Y.

STEP DOWN
TRANSFORMERS

Whenever you need a 110/115 volt, 60 cycle current supply but have only 200/240 volt, 60 cycle available, use an Acme Electric Step Down Transformer. 75 to 1000 watt capacities have primary cord to plug into line and secondary plug receptacle. 2000 and 3000 watt capacities available with conduit knockouts.



Write for Bulletin SD151.

ACME ELECTRIC CORPORATION
229 WATER STREET CUBA, N. Y.

Acme Electric

MARK OF PROGRESS . . .
IN ELECTRICAL PRODUCTS

VICKERS ELECTRIC DIVISION

Of Vital Interest to the Electrical Industry...
Vickers
Magnetic Amplifiers

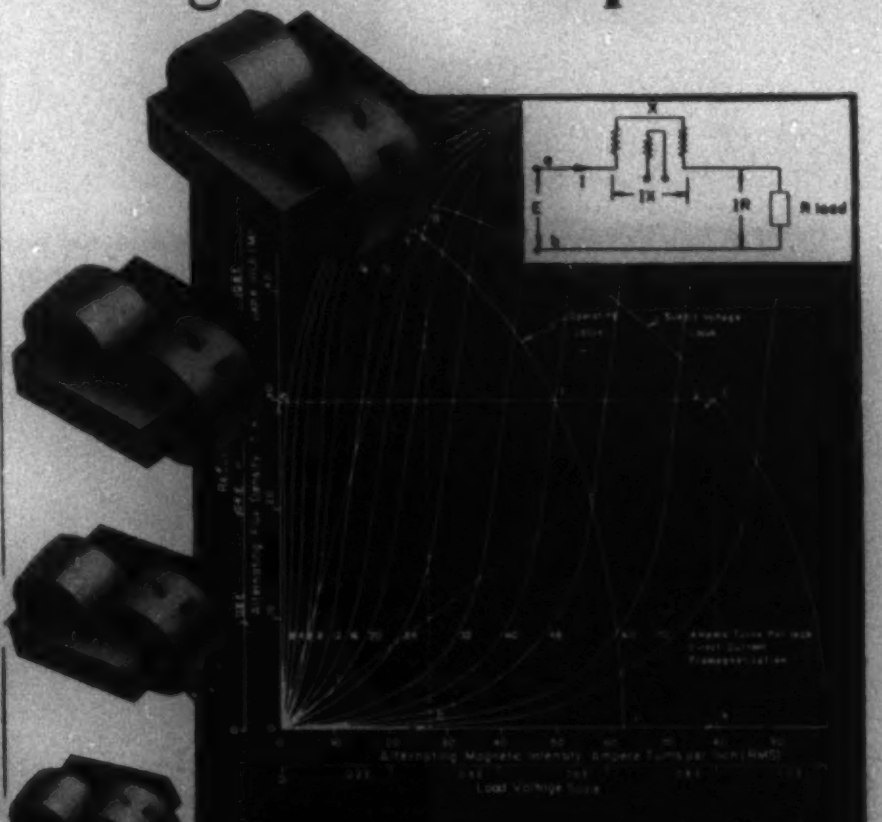

Circuit operating locus superposed on characteristics of magnetic core material for a simple series reactor giving a 3.0 to 1 load swing with a 5.0 to 1 reactance change. Range of premagnetization required is 5.0 ampere-turns per inch to 40.0 ampere-turns per inch.

VICKERS ELECTRIC DIVISION, Vickers Inc., offers complete, extensive *Research*, *Engineering* and *Development* facilities which are available to the industry for technical problems and applications of VICKERS products relative to specific requirements.

MAGNETIC AMPLIFIERS • STATIC VOLTAGE REGULATORS • STATIC MOTOR SPEED CONTROLS • POWER SATURABLE REACTORS RECTIFIERS • PHOTOELECTRIC CELLS • SERVOMECHANISMS MAGNETIC FLUID CLUTCHES • SPECIAL MOTORS AND GENERATORS TRANSFORMERS • CONTROLLED POWER RECTIFIERS FOR ELECTRO-CHEMICAL PROCESSES

Request Magnetic Amplifier Bulletin VT-2000

VICKERS ELECTRIC DIVISION

VICKERS ELECTRIC DIVISION
1815 LOCUST ST., ST. LOUIS 3, MISSOURI
Manufacturers of Electrical Products
A Unit of the Sperry Corporation

Cole Electric Co.

8439 Steller Drive
Culver City, Calif.
TExas 0-4701

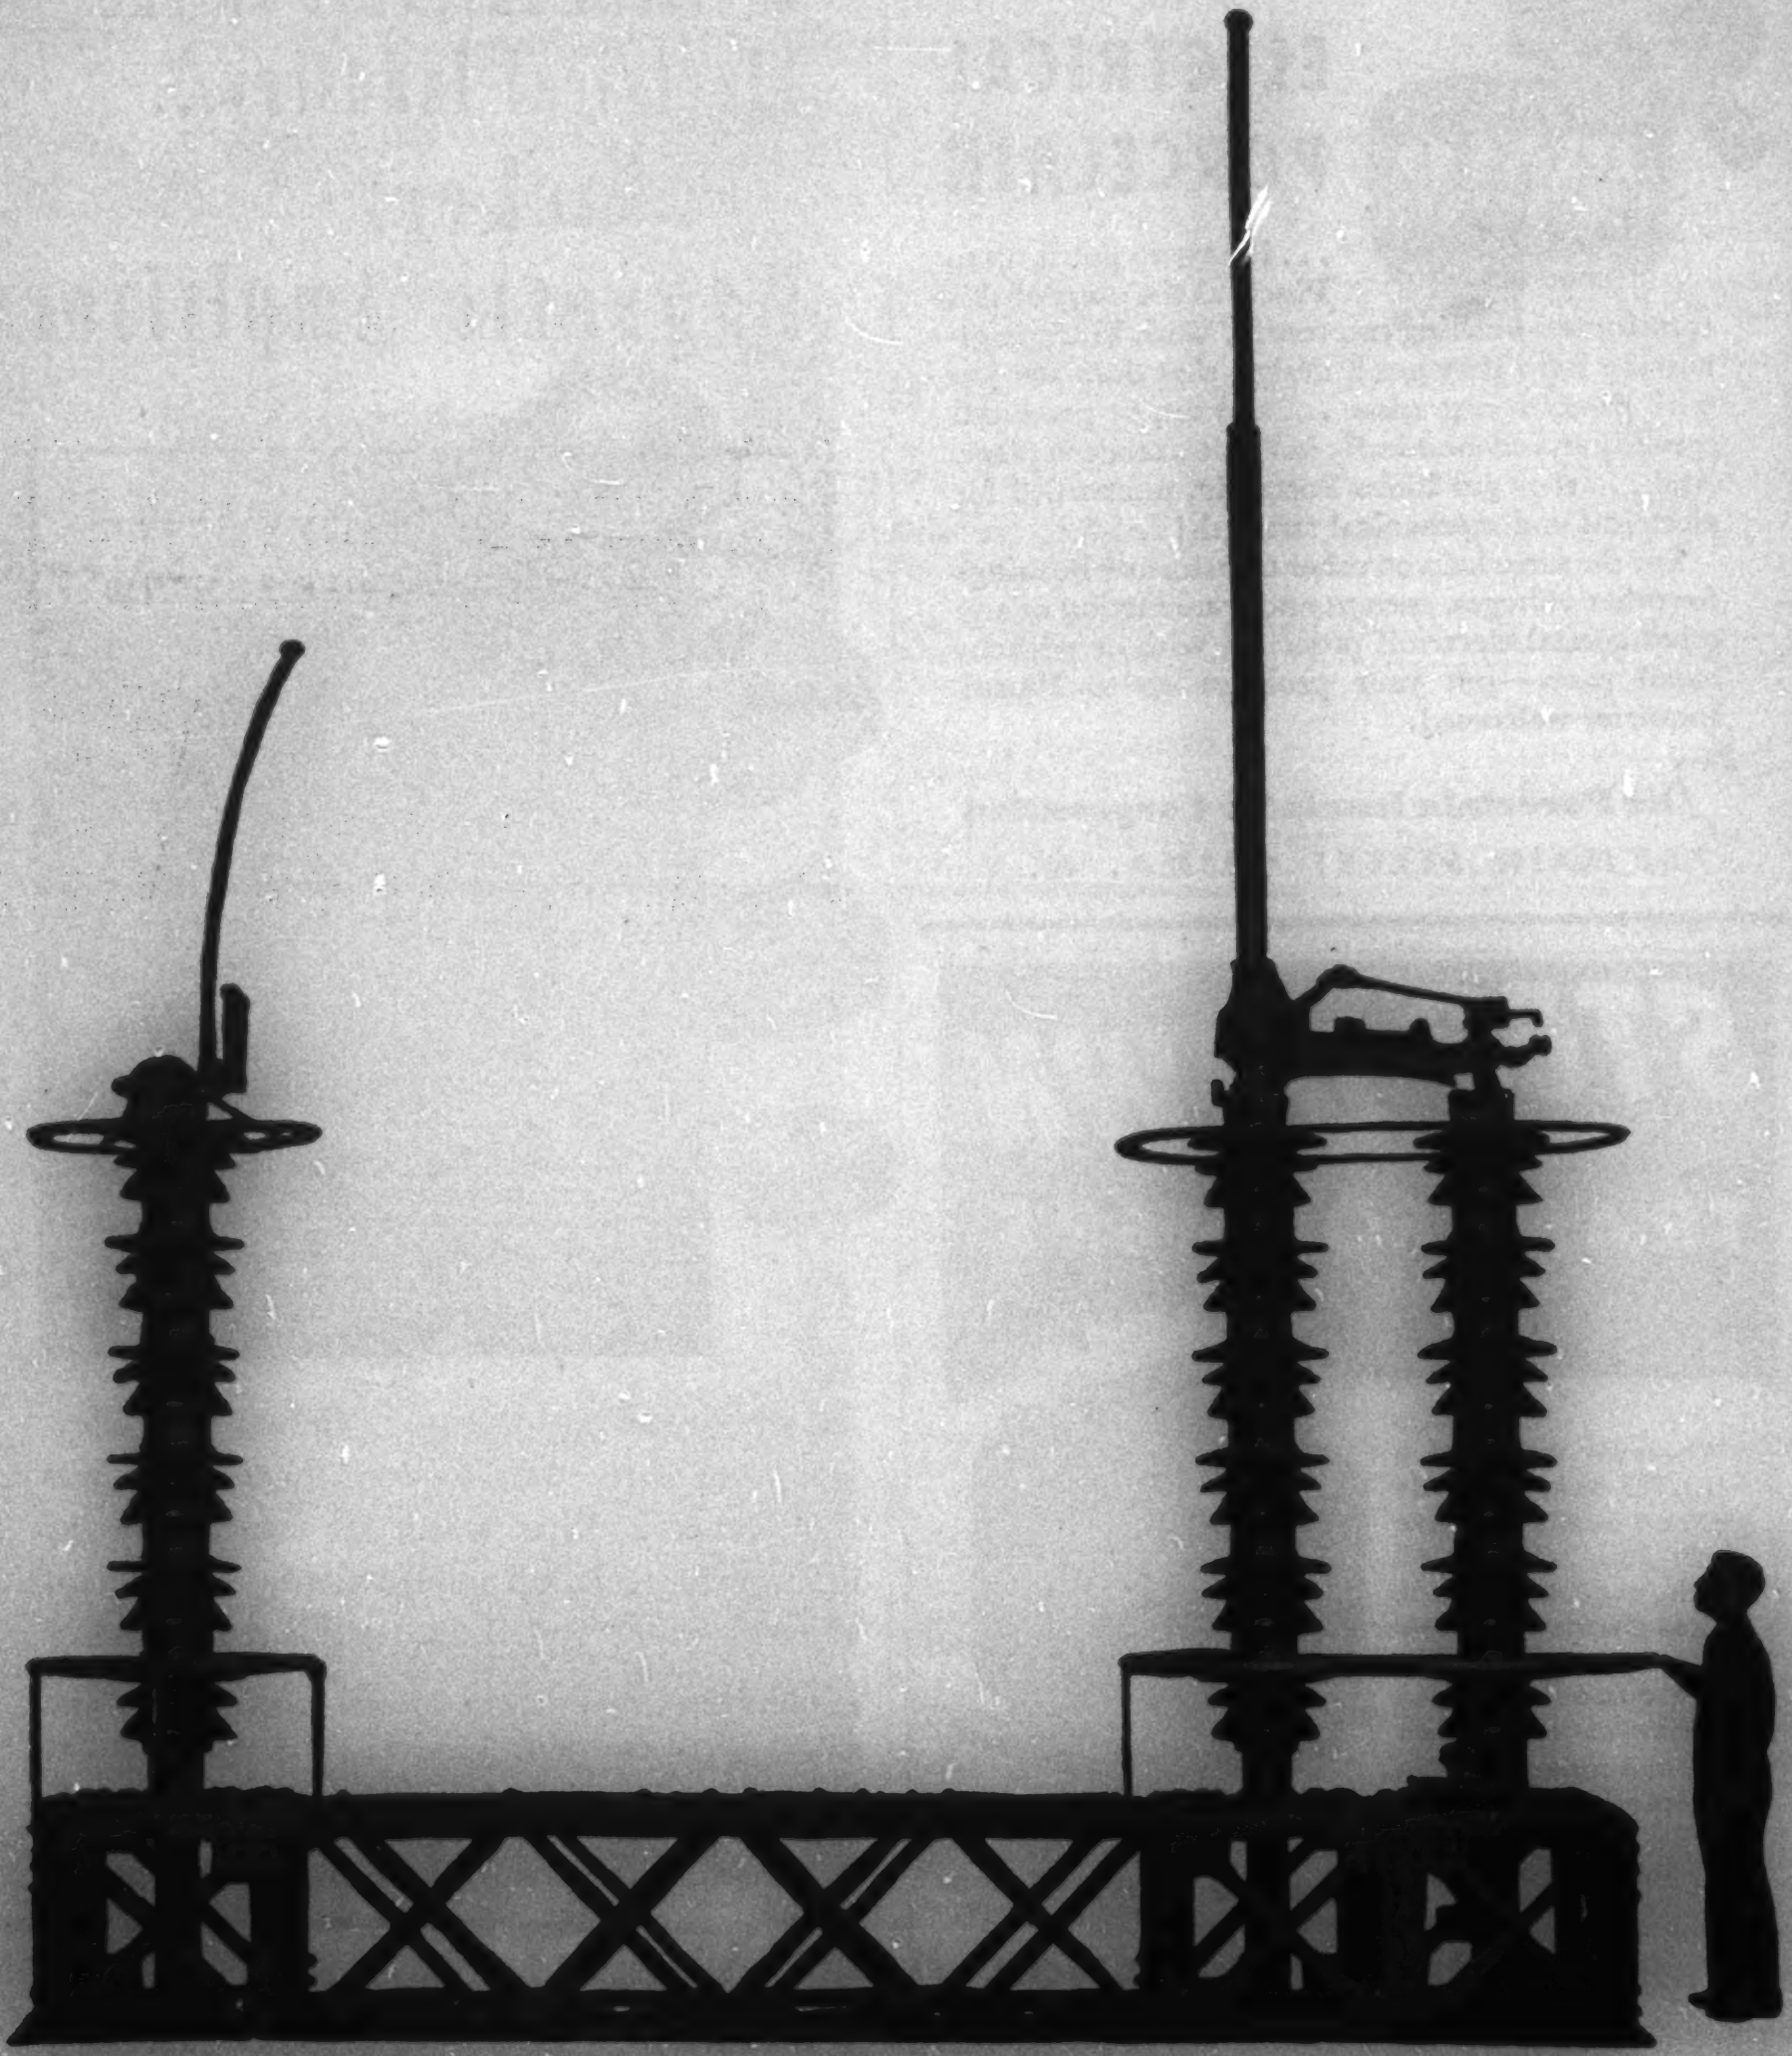

AIRBREAK DISCONNECTING SWITCH
230,000 Volts—1200 Amperes, Type OU, T.P.S.T. Vertical Break, Group Operated. (One Pole Shown)

See Bulletin 45A

Are You *Really* Interested in Getting More for Your Money

For years, I-T-E has maintained leadership in the circuit breaker and switchgear industry. Today, I-T-E invites you to look over the special built-in features which have become a part of its "standard price" switchgear . . .

Planned for better
ACCESSIBILITY

METERS AND RELAYS are mounted on a *Relay Panel* designed for that specific purpose. Why?

a. Delicate relay mechanisms are not subjected to "operation by vibration" when circuit breaker doors are opened or closed or bumped.

b. The Relay Compartment is just that. The secondary wiring, control bus, and relays are together, *where you want them*, not where manufacturing economy dictates.

Planned for easier
HANDLING

TESTING CIRCUIT BREAKER operation within the structure is no longer a chore.

a. Release a catch, move the breaker 4½ inches, and you are ready to test. An electrical close-trip test-switch is furnished on every breaker unit. Test control circuits are automatically set up. No jumpers, no plugs, no push, no pull. Easy does it!



Planned for greater
SAFETY



HIGH IMPULSE CIRCUIT BREAKERS

If you are impulse conscious you are familiar with the present interim test that permits circuit breakers of the 5KV class to be subjected to a 45KV impulse test across the open contacts. Type HV breakers are tested to withstand arc 60KV impulse — phase to phase, phase to ground, and across the open contacts.

COORDINATED IN MULTUMITE BOARDS

I-T-E HV MULTUMITE Switchgear assemblies coordinate efficient I-T-E HV Air Circuit Breakers with transformers, meters, bus, and instruments into a single, efficient unit. I-T-E HV Air Circuit Breakers are rated at 5KV, 7.5KV, and 15KV — 600 A., 1200 A., and 2000 A. continuous; 50MVA, 150MVA, and 250MVA interrupting.



These are but a few of our better points. There is an I-T-E Field Application Engineer in your area. Permit him to tell you of other advantages, and to assist in your switchgear planning.

POWER SWITCHGEAR

I-T-E CIRCUIT BREAKER COMPANY, 19th & Hamilton Streets, Philadelphia 30, Pa.
31 Offices in United States • In Canada, EASTERN POWER DEVICES, Ltd., TORONTO
For Export: Philips Export Corp., New York

* R&IE

SWITCHGEAR • UNIT SUBSTATIONS • ISOLATED PHASE BUS STRUCTURES • POWER CIRCUIT BREAKERS
MECHANICAL RECTIFIERS • RESISTORS • SPECIAL PRODUCTS

* *For power switching equipment refer to Railway & Industrial Engineering, an I-T-E organization*



how to get ACCURATE DATA down on paper!

G-E PHOTOELECTRIC RECORDER

TO RECORD

CURRENT
VOLTAGE
PRESSURE
STRAIN
TEMPERATURE
AIR FLOW
LIGHT
SPEED
VIBRATION
THICKNESS

Permanent, accurate records are a necessity in many development tests, laboratory investigations, and research projects. That's where the G-E photoelectric recorder can help you. These versatile instruments can record almost anything that can be measured by an indicating instrument.

You can depend upon the accuracy of recorded data since the Type CE recorder is sensitive far beyond the range of ordinary recording instruments. High sensitivity permits full scale deflection with values as low as 1.0 microamperes. Response speeds as high as ¼ second are provided by the photoelectric balancing system.

EASY TO USE The CE recorder is compact, weighs but 35 pounds. Power supply is entirely self contained. By a simple adjustment chart speeds from ½ inch per hour to 72 inches per minute are available.

Full information on operating principles, ratings, and prices of the Type CE is contained in bulletin GEC-254. Write for your copy today.



record and view too!

PM-10 OSCILLOGRAPH

With the Type PM-10 oscillograph you can record the data and view it simultaneously, aiding in the investigation or testing of many machines or devices.

The PM-10 can be furnished with any number of galvanometers up to 12, permitting a choice of sensitivity and frequency response. Oscillograph deflection can be in terms of any measurable electrical quantity. By using intermediate equipment, deflection can be made proportional to many non-electrical quantities.

Easy and convenient to use, the PM-10 has hinged covers all over galvanometer and optical compartments. Timing lines can be photographed directly on the film. For convenience, every tenth line is indicated. Full description in bulletin GEC-449.

For assistance with any problem in measurement or recording of measurement, use the experience of G-E engineers. Contact your nearest G-E Sales Office and let us help. Apparatus Department, General Electric Company, Schenectady 5, N. Y.

GENERAL ELECTRIC